

CATERING EQUIPMENT

ADDED PRODUCTS

2023



QUICK NAVIGATION



p.05

PACKAGING

Vacuum pack machines

Page 5



p.07

**COOKING
EQUIPMENT**

Gas cooking ranges

Page 7

Gas deck ovens

Page 8 - 9

Gas fryers

Page 10

Gas pressure fryer

Page 11

Table model fryers,

Oil filter cart

Page 12

Corn dog maker,

Sous-vide cooker

Page 13


Electric salamander,

Microwaves

Page 14

Combi steamers

Page 15

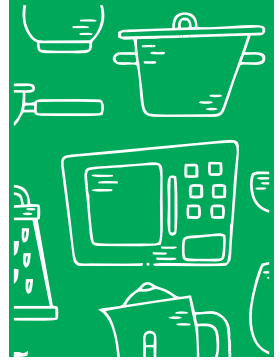

p.16

**FOOD
PREPARATION**

Meat slicers

Page 16

Bowl cutter

Page 17





p.19

WASHING & HARDWARE

Faucets,
Pre-rinse sprays

Page 19 - 22

Glass rinsers

Page 23

Hose reels


Page 24

Water filtration system

Page 25

Dishwasher baskets

Page 26 - 27

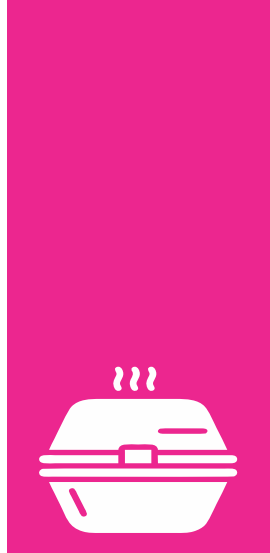

p.29

HOLDING & DISTRIBUTION

Insulated
food pan carriers,
Beverage server

Page 29



p.31

REFRIGERATION

Display freezers,
Gelato freezers

Page 31

Open cooler
merchandisers,
Display cabinets

Page 32 - 33

Heated display cabinets

Page 34

Open merchandisers

Page 35

Soft serve machine

Page 37

**Modular ice machines,
Ice bins**

Page 38 - 39

Blast chillers

Page 40

**Refrigerated
storage cabinets**

Page 41 - 42

Sushi display fridge,

Bullet ice maker

Page 43

**Refrigerated glass
display cabinets**

Page 44

Rotating cake display

Page 45



p.47

BEVERAGE

Coffee machines

Page 47

Hot chocolate machine

Page 48

Coffee brewers

Page 49

Slush machines

Page 50





SmartVac



600MM DUAL SEALING BAR (FLOOR STANDING WITH GAS FLUSH)

MODEL	SmartVac DZ-600
ELECTRICITY	1.8kW, 220V, Single Phase
DIMENSIONS	680 x 728 x 955mm high
WEIGHT	156kg
CHAMBER SIZE	620 x 620 x 95mm deep
OUTPUT	2-4 times/min
SEALING BAR	(2x) 600 x 10mm
ORDER CODE	VPS0600FS-GF



400MM DUAL SEALING BAR (TABLE MODEL)

MODEL	SmartVac DZ-400T
ELECTRICITY	1.7kW, 220V, Single Phase
DIMENSIONS	590 x 620 x 620mm high
WEIGHT	75kg
CHAMBER SIZE	420 x 620 x 60mm deep
OUTPUT	2-4 times/min
SEALING BAR	(2x) 420 x 10mm
ORDER CODE	VPS0400T



240MM SEALING BAR (TABLE MODEL)

MODEL	SmartVac DZ-240B
ELECTRICITY	0.7kW, 220V, Single Phase
DIMENSIONS	550 x 580 x 280mm high
WEIGHT	75kg
CHAMBER SIZE	248 x 320 x 50mm deep
OUTPUT	2-4 times/min
SEALING BAR	240 x 10mm
ORDER CODE	VPS0240

UPDATED PRODUCTS CODES

500MM SEALING BAR WITH GAS FLUSH
 OLD CODE VPS0500
 ORDER CODE VPS0500FS-GF

450MM SEALING BAR WITH GAS FLUSH
 OLD CODE VPS450
 ORDER CODE VPS0450T-GF

400MM SEALING BAR WITH GAS FLUSH
 OLD CODE VPS0400-GF
 ORDER CODE VPS0400FS-GF

arisco®



GAS COOKING EQUIPMENT



4 BURNER WITH ELECTRIC CONVECTION OVEN - 900 RANGE

MODEL	Arisco GR922E
BTU RATING	(4x) 27 000
ELECTRICITY	3kW, 380V, 3 Phase + N
GAS CONSUMPTION	(LPG)3,09 kg/h
DIMENSIONS	850 x 900 x 900mm high
WEIGHT	158kg
OVEN DIMENSIONS	610 x 700 x 280mm high
OVEN GRID SIZE	2/1 GN trays
RUNNER SPACING	48mm
OVEN TEMP. RANGE	50~320°C
ORDER CODE	ARI/GR922E



4 BURNER WITH GAS OVEN-900 RANGE

MODEL	Arisco Gr922
BTU RATING	(4x) 27 000 + 25 000
GAS CONSUMPTION	(LPG)3,09 kg/h
DIMENSIONS	850 x 900 x 900mm high
WEIGHT	158kg
OVEN DIMENSIONS	610 x 700 x 280mm high
OVEN GRID SIZE	2/1 GN trays
RUNNER SPACING	48mm
OVEN TEMP. RANGE	50 ~ 320°C
ORDER CODE	ARI/GR922



FRENCH TOP COOKING RANGE WITH GAS OVEN - 900 RANGE

MODEL	Arisco GR922P
BTU RATING	48 000 + 25 000
GAS CONSUMPTION	(LPG)1,68 kg/h
DIMENSIONS	850 x 900 x 900mm high
WEIGHT	180kg
OVEN DIMENSIONS	610 x 700 x 280mm high
OVEN GRID SIZE	2/1 GN trays
RUNNER SPACING	48mm
OVEN TEMP. RANGE	50~320°C
ORDER CODE	ARI/GR922P



FRENCH TOP COOKER ON OPEN CABINET - 900 RANGE

MODEL	Arisco GR922P
BTU RATING	48 000
GAS CONSUMPTION	(LPG)1,10 kg/h
DIMENSIONS	850 x 900 x 900mm high
WEIGHT	180kg
ORDER CODE	ARI/GR921P

GAS DECK OVEN - SINGLE DECK **2 TRAYS PER DECK**



MODEL	BakeMark HLY-102
ELECTRICITY	0.075kW, 220V, Single Phase
BTU RATING	27 000
DIMENSIONS	1330 x 850 x 660mm high
WEIGHT	106kg
CHAMBER DIMENSIONS	870 x 665 x 185mm high
CHAMBER CAPACITY	(2x) 600 x 400mm trays per deck
TEMPERATURE RANGE	30 ~ 400°C

ORDER CODE

DOB/1202G

GAS DECK OVEN - DOUBLE DECK **2 TRAYS PER DECK**



MODEL	BakeMark HLY-204
ELECTRICITY	0.15kW, 220V, Single Phase
BTU RATING	51 000
DIMENSIONS	1330 x 850 x 1400mm high
WEIGHT	200kg
CHAMBER DIMENSIONS	(2x) 870 x 665 x 185mm high
CHAMBER CAPACITY	(2x) 600 x 400mm trays per deck
TEMPERATURE RANGE	30 ~ 400°C

ORDER CODE

DOB/2204G





GAS DECK OVEN - SINGLE DECK 3 TRAYS PER DECK

MODEL	BakeMark HLY-103E
ELECTRICITY	0.075kW, 220V, Single Phase
BTU RATING	34 000
DIMENSIONS	1815 x 925 x 168mm high
WEIGHT	120kg
CHAMBER DIMENSIONS	1330 x 710 x 185mm high
CHAMBER CAPACITY	(3x) 600 x 400mm trays
TEMPERATURE RANGE	30 ~ 400°C

ORDER CODE

DOB/1303G



GAS DECK OVEN - DOUBLE DECK 3 TRAYS PER DECK

MODEL	BakeMark HLY-206E
ELECTRICITY	0.15 kW, 220V, Single Phase
BTU RATING	68 000
DIMENSIONS	1815 x 925 x 1400mm high
WEIGHT	234kg
CHAMBER DIMENSIONS	(3x) 1330 x 710 x 185mm high
CHAMBER CAPACITY	(3x) 600 x 400mm trays per deck
TEMPERATURE RANGE	30 ~ 400°C

ORDER CODE

DOB/2306G



GAS DECK OVEN - TRIPLE DECK 3 TRAYS PER DECK

MODEL	BakeMark HLY-309E
ELECTRICITY	0.2kW, 220V, Single Phase
BTU RATING	102 000
DIMENSIONS	1815 x 925 x 1600mm high
WEIGHT	370kg
CHAMBER DIMENSIONS	(3x) 1330 x 710 x 185mm high
CHAMBER CAPACITY	(3x) 600 x 400mm trays per deck
TEMPERATURE RANGE	30 ~ 400°C

ORDER CODE

DOB/3309G




20 LITRE - FLOOR STANDING

MODEL	SmartChef DCF3-LPG
BTU RATING	90 000
CAPACITY	20Lt
DIMENSIONS	380 x 835 x 1145mm high
WEIGHT	75kg
TEMPERATURE RANGE	90 ~ 200°C
NUMBER OF BURNERS	3
ORDER CODE	FSG0040

ADDITIONAL BASKETS

DIMENSIONS	160 x 335 x 150mm deep
ORDER CODE	FSB0075

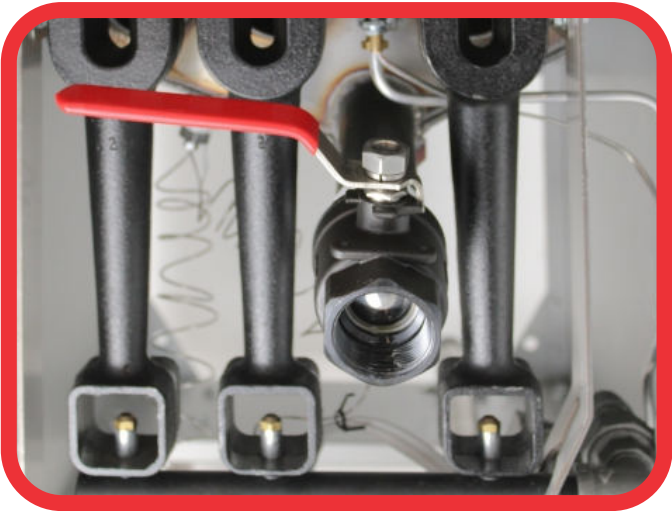



25 LITRE - FLOOR STANDING

MODEL	SmartChef YXY-25D
ELECTRICITY	0.65kW, 220V, Single Phase
BTU RATING	45 000
DIMENSIONS	500 x 1040 x 1180mm high
WEIGHT	165kg
TEMPERATURE RANGE	60 ~ 200°C
OPERATING PRESSURE	12psi
CAPACITY	25Lt
BASKETS INCLUDED	250 x 340 x 195mm deep - 3 tier
BASKET CAPACITY	Chicken ± 24-30 pc
ORDER CODE	PFS-YXY-25D

OPTIONAL EXTRAS

250 x 340 x 195mm deep	XPFS1000
3 LAYER BASKET	XPFS3000
FILTER PAPER 100 PACK	XPFS/0005



FRYERS *TABLE MODEL*

SmartChef



2 x 6LT

MODEL SmartChef E-DZ-6L-2
ELECTRICITY (2x) 230V, 2.5kW, Single Phase
CAPACITY (2x) 6Lt
DIMENSIONS 540 x 410 x 285mm high
WEIGHT 6kg
TEMP. RANGE 60 ~ 200°C
BASKETS INCLUDED (2x) 200 x 215 x 100mm deep
BASKETS CAPACITY 4.3Lt
ORDER CODE KB/E-DZ-6L-2



1 x 6LT

MODEL SmartChef E-DZ-6L
ELECTRICITY 230V, 2.5kW, Single Phase
CAPACITY 6Lt
DIMENSIONS 260 x 410 x 285mm high
WEIGHT 4kg
TEMP. RANGE 60 ~ 200°C
BASKETS INCLUDED (1x) 200 x 215 x 100mm deep
BASKETS CAPACITY 4.3Lt
ORDER CODE KB/E-DZ-6L

***SUPPLIED WITH NIGHT COVERS**



OIL FILTER CART



MODEL SmartChef E-LYC-1
ELECTRICITY 0.55kW, 220V, Single Phase
DIMENSIONS 440 x 755 x 620mm
WEIGHT 25kg
CAPACITY 40Lt

ORDER CODE

KB/E-LYC-1



CORN DOG BAKER



MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
TEMPERATURE RANGE
CAPACITY

SmartChef HX-216
1.5kW, 220V, Single Phase
335 x 300 x 245mm high
8kg
50 ~ 300°C
6 Corn dogs

ORDER CODE

WBS2002



SOUS - VIDE COOKER



MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
TEMPERATURE RANGE
HEATING CAPACITY

SmartChef SV130
1.5kW, 220V, Single Phase
70 x 145 x 340mm high
1.3kg
5 ~ 90°C
20Lt ~ 30Lt

ORDER CODE

SVS0130



ELECTRIC SALAMANDER



MODEL SmartChef SA936
ELECTRICITY 2kW ,220V, Single Phase
DIMENSIONS 610 x 340 x 280mm high
WEIGHT 13.5kg
TEMP. RANGE 50 ~ 250°C

ORDER CODE SES0936

MICROWAVES
(AVAILABLE OCTOBER 2023)



25 Litres

MODEL SmartWave MDM25
ELECTRICITY 1kW, 240V, Single Phase
DIMENSIONS 510 x 430 x 310mm high
CAPACITY 25Lt
WEIGHT 17kg

ORDER CODE MWS25100



34 Litres

MODEL SmartWave MWM3414
ELECTRICITY 1.4kW, 230V, Single Phase
DIMENSIONS 550 x 485 x 345mm high
CAPACITY 34Lt
WEIGHT 32kg

ORDER CODE MWS3414



17 Litres

MODEL SmartWave MWM1721
ELECTRICITY 2.1kW, 240V, Single Phase
DIMENSIONS 420 x 560 x 340mm high
CAPACITY 17Lt
WEIGHT 18kg

ORDER CODE MWS1721

COMBI STEAMERS

MILLENNIAL TOUCH & MANUAL CONTROL



5 PAN GASTRONOMY MANUAL CONTROL

MODEL	EKA 523NUD
ELECTRICITY	3.2kW, 230V, Single Phase
DIMENSIONS	550 x 755 x 665mm high
WEIGHT	41kg
CAPACITY	(5x) 2/3 GN
CHAMBER DIMENSIONS	350 x 390 x 450mm high
RUNNER SPACING	80mm
TEMPERATURE RANGE	30 ~ 270°C

ORDER CODE

EKF523NUD



5 PAN GASTRONOMY TOUCH CONTROL

MODEL	EKA 523NTUD
ELECTRICITY	3.2kW, 230V, Single Phase
DIMENSIONS	550 x 755 x 662mm high
WEIGHT	42kg
CAPACITY	(5x) 2/3 GN
CHAMBER DIMENSIONS	350 x 390 x 450mm high
RUNNER SPACING	80mm
TEMPERATURE RANGE	30 ~ 270°C

ORDER CODE

EKF523NTUD



COOKING EQUIPMENT



195mm BLADE

MODEL	SmartChef HBS-195JS
ELECTRICITY	0.12kW, 220V, Single Phase
DIMENSIONS	420 x 380 x 315mm high
WEIGHT	12kg
BLADE DIAMETER	195mm
SLICE THICKNESS	0.2 ~ 12mm
MAX SLICE WIDTH	150mm

ORDER CODE **MSS0195**



220mm BLADE

MODEL	SmartChef HBS-220
ELECTRICITY	0.12kW, 220V, Single Phase
DIMENSIONS	480 x 395 x 360mm high
WEIGHT	15kg
BLADE DIAMETER	220mm
SLICE THICKNESS	0.2 ~ 12mm
MAX SLICE WIDTH	160mm

ORDER CODE **MSS0220**



250mm BLADE

MODEL	SmartChef HBS-250
ELECTRICITY	0.15kW, 220V, Single Phase
DIMENSIONS	540 x 490 x 420mm high
WEIGHT	16kg
BLADE DIAMETER	250mm
SLICE THICKNESS	0.2 ~ 12mm
MAX SLICE WIDTH	180mm

ORDER CODE **MSS0250**



300mm BLADE

MODEL	SmartChef HBS-300
ELECTRICITY	0.25kW, 220V, Single Phase
DIMENSIONS	577 x 493 x 436mm high
WEIGHT	22kg
BLADE DIAMETER	300mm
SLICE THICKNESS	0.2 ~ 15mm
MAX SLICE WIDTH	200mm

ORDER CODE **MSS0300**

BLENDER SOUND COVER

SmartBlend



Blender Sound Cover
ORDER CODE

BSB1680 - S/COVER

COMPATIBLE WITH
BSB1680C
BSB1680



BOWL CUTTER

SmartChef



MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
CAPACITY
REVOLUTION

SmartChef HR-9
1.8kW, 220V, Single Phase
520 x 317 x 445mm high
20kg
9Lt
1000 ~2500 rpm

ORDER CODE

BCS0009



Water

CONSERVATION

in your  **KITCHEN**



Ever wonder how much water is going down the drain in your commercial or institutional facility? Explore how upgrading key plumbing fixtures can help conserve water, energy and money in the long run.

HOW WATER IS USED


Most of the water used in restaurants is associated with equipment and processes that take place in the kitchen.



Hospitality and **foodservice** establishments account for approximately **15%** of water used in commercial and institutional facilities.¹



Of all the water used in restaurants, about **52%** is for kitchen dishwashing.¹




Restrooms follow kitchens with the **second highest water consumption** in restaurants.¹

THE GREATER IMPACT

Being water-efficient can **decrease operating costs by approximately 11%** and **lower energy and water use by 10-15%**.²



Because foodservice facilities use **hot water** for many tasks, reducing water use can decrease energy bills.



Based on industry averages, sewage costs are often **1.5x** the cost of water, and energy costs are often **9x** the cost of water.³



The price of water⁴ is going up and energy rates⁵ are **predicted to rise** in the coming years.



DECK MOUNTED PRE-RINSE SPRAY

- Single Hole Base • 18" Flexible Inlet Hoses

Inlet	In-Line Check Valves - G 1/2 (BSPP) Male
Outlet	1.15 GPM Spray Valve
Handle	Euro Lever
Cartridge	Quarter-Turn Ceramic
Pressure Rating	20 ~ 125 psi
Temp. Rating	4 ~ 60°C

ORDER CODE **TS/5PR-2S00**




WALL MOUNTED PRE-RINSE SPRAY

- 8" Wall Mounted Base

Inlet	In-Line Check Valves - 1/2" NPT Female
Outlet	1.15 GPM Spray Valve
Handle	Euro Lever
Cartridge	Quarter-Turn Ceramic
Pressure Rating	20 ~ 125 psi
Temp. Rating	4 ~ 60°C

ORDER CODE **TS/5PR-8W00**

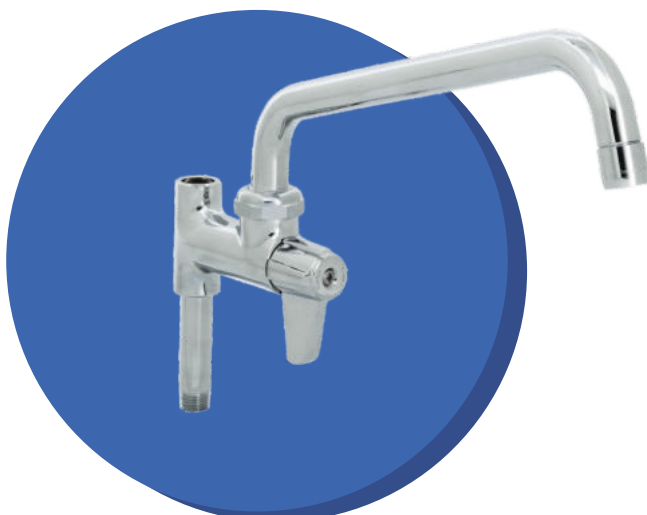

PRE-RINSE ADD-ON-FAUCET

- Add-On for Pre-Rinse • 12" Swing Nozzle Equip

Inlet	3/8" NPT Male
Outlet	4.52 GPM Laminar Flow Device
Handle	Euro Lever
Cartridge	Ceramic
Pressure Rating	20 ~ 125 psi
Temp. Rating	4 ~ 60°C

ORDER CODE **TS/5AFL12**



DECK MOUNTED MINI PRE-RINSE SPRAY WITH 8" FAUCET

- Single Hole Base • 18" Flexible Inlet Hoses
- 8" Add-on Faucet • 628 mm Low-Profile Height

Inlet	In-Line Check Valves - G 1/2 (BSPP) Male
Spray Outlet	1.15 GPM Spray Valve
Nozzle	3.83 GPM 8" Add-On-Faucet Swing Nozzle
Handle	Euro Lever
Cartridge	Quarter-Turn Ceramic
Pressure Rating	20 ~ 125 psi
Temp. Rating	4 ~ 60°C

ORDER CODE **TS/5MPH-2SLN-08**



WALL MOUNTED MINI PRE-RINSE SPRAY WITH 8" FAUCET

- 8" Wall mounted base • 8" Add-on Faucet
- 628 mm Low-Profile Height

Inlet	In-Line Check Valves - 1/2" NPT Female
Spray Outlet	1.15 GPM Spray Valve
Nozzle	4.62 GPM 8" Add-On-Faucet Swing Nozzle
Handle	Euro Lever
Cartridge	Quarter-Turn Ceramic
Pressure Rating	20 ~ 125 psi
Temp. Rating	4 ~ 60°C

ORDER CODE **TS/5MPH-8WLN-08**



WALL MOUNTED KITCHEN FAUCET

- 6" Wall Mount Faucet • 12" Swing Nozzle

Inlet	G 1/2 (BSPP) Male Offset Inlets
Outlet	3.96 GPM Laminar Flow Device
Handle	Euro Lever
Cartridge	Quarter-Turn Ceramic
Pressure Rating	20 ~ 125 psi
Temp. Rating	4 ~ 60°C

ORDER CODE **TS/EU-6WF12**



SINGLE LEVER KITCHEN FAUCET

- Single Hole Base • 19" Flexible Inlet Hoses
- 9" Swivel Nozzle

Inlet	G 1/2" Female
Outlet	Full Flow Aerator
Handle	Single Lever
Cartridge	Single Lever Ceramic
Pressure Rating	20 ~ 125 psi
Temp. Rating	4 ~ 60°C

ORDER CODE **TS/EA-1DF09-LH**



HIGH SPOUT BAR FAUCET SINGLE LEVER

- Single Hole Base • 18" Flexible Inlet Hoses
- 8" Nozzle Single Lever • High Rise

Inlet	G 1/2" Female
Outlet	3.96 GPM Full Flow Aerator
Handle	Single Lever
Cartridge	Single Lever Ceramic
Pressure Rating	20 ~ 125 psi
Temp. Rating	4 ~ 60°C

ORDER CODE **TS/EA-1DF08-300**



LOW FLOW SENSOR FAUCET

- Single Hole Base • Vandal Resistant

Inlet	Flexible Supply Hoses G 1/2" Female
Outlet	0.5 GPM Vandal Resistant Spray Device
Nozzle	5.5" Cast Spout
Pressure Rating	20 ~ 125 psi

ORDER CODE **TS/CEF-1DS-VF05**



DECK MOUNTED KITCHEN FAUCET

- Single Hole Base • 18" Flexible Inlet Hoses
- 8" Swing Nozzle

Inlet	5/8" OD Copper Tubing or 1/2" NPSM Male
Outlet	4.65 GPM Laminar Flow Device
Handle	Euro Lever
Cartridge	Quarter-Turn Ceramic
Pressure Rating	20 ~ 125 psi
Temp. Rating	4 ~ 60°C

ORDER CODE TS/5F-2SLX08



DECK MOUNTED GOOSENECK FAUCET

- Single Hole Base • 18" Flexible Inlet Hoses
- 5.5" Swivel Gooseneck Nozzle

Inlet	5/8" OD Copper Tubing or 1/2" NPSM Male
Outlet	2.2 GPM Aerator
Handle	Euro Lever
Cartridge	Quarter-Turn Ceramic
Pressure Rating	20 ~ 125 psi
Temp. Rating	4 ~ 60°C

ORDER CODE TS/5F-2SLX05A



WALL MOUNTED POT FILLER

- Single Control • 18" Double Joint Nozzle
- Insulated On-Off Control

Inlet	5/8" OD Copper Tubing or 1/2" NPSM Male
Outlet	4.24 GPM Heat Resistant On-Off Volume Control
Handle	4-Arm
Cartridge	Compression
Pressure Rating	20 ~ 125 psi
Temp. Rating	4 ~ 60°C

ORDER CODE TS/B-0592





GLASS / PITCHER RINSER 180 x 170mm

Inlet	1/2" BSP Drain inlet spigot
Wash Mouth	114mm Ø
Pressure Rating	14.5 psi
Cut-out Size	157 x 144mm

ORDER CODE

TS/EX-RINSER-1









GLASS / PITCHER RINSER 630 x 220mm

Inlet	1/2" BSP Drain inlet spigot
Wash Mouth	114mm Ø
Pressure Rating	14.5 psi
Cut-out Size	180 x 610mm

ORDER CODE

TS/EX-RINSER-3

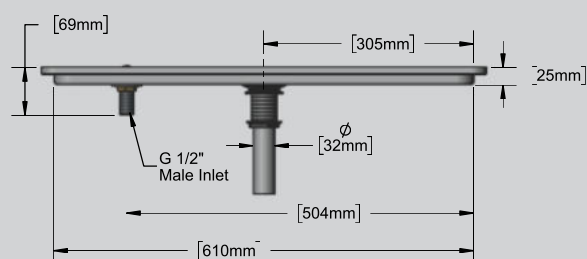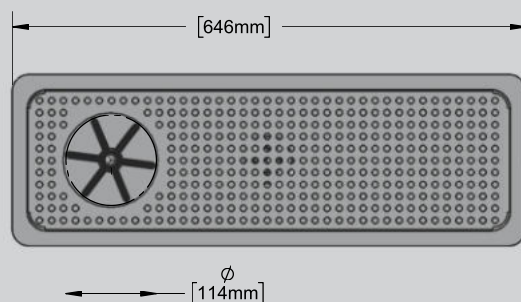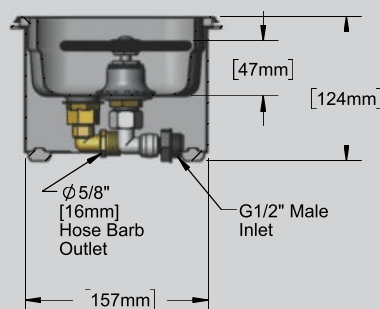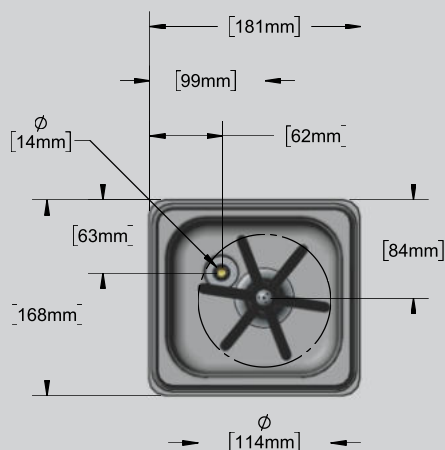



STAINLESS STEEL HOSE REEL WITH HOSE - 10m

Inlet	3/8" NPT female inlet
Hose Size	3/8 x 35 in
Hose Length	10.7m
Spray Valve	Front trigger water gun
Spray Valve Flow	15.5 L/min
Pressure Rating	20 ~ 125 psi
Temp. Rating	4 ~ 93°C

ORDER CODE

TS/B-7132-05



EPOXY COATED HOSE REEL WITH HOSE - 10m

Inlet	3/8" NPT female inlet
Hose Size	3/8 x 35 in
Hose Length	10.7m
Spray Valve	Front trigger water gun
Spray Valve Flow	15.5 L/min
Pressure Rating	20 ~ 125 psi
Temp. Rating	4 ~ 93°C

ORDER CODE

TS/B-7232-05



EPOXY COATED HOSE REEL WITH HOSE - 15m (ECONO MODEL)

Inlet	3/8" NPT female inlet
Hose Size	3/8 x 50 in
Hose Length	15.2m
Spray Valve	Front trigger water gun
Spray Valve Flow	15.5 L/min
Pressure Rating	20 ~ 125 psi
Temp. Rating	4 ~ 60°C

ORDER CODE

TS/5HR-242-12



UNIVERSAL SWING BRACKET FOR HOSE REELS


Dimensions	121 x 279 x 209mm
Weight	3.5kg

FEATURES

- Designed for one person installation
- Easy Install stainless steel wall mount swing bracket
- Fits all T&S 3/8" and 1/2" hose reels
- Includes reel-to-bracket mounting hardware
- Positive stops built in to bracket to keep hose reel from hitting or damaging wall

ORDER CODE

TS/G019430-45



WATER FILTRATION SYSTEM CONSISTING OF THE CARTRIDGE, HEAD & FLOWMETER - FOR 10/11/16/20 PAN OVENS



XL

SPECIFICATIONS

DIMENSIONS	136ø x 471mm high
FLOW RATE	3.7 LPM
PRESSURE	29 – 116 psi
TEMP. RANGE	4 – 30°C

ORDER CODE

WFS0000-XL



L

SPECIFICATIONS

DIMENSIONS	136ø x 360mm high
FLOW RATE	4 LPM
PRESSURE	29 – 116 psi
TEMP. RANGE	4 – 30°C

ORDER CODE

WFS0000-L

FLOW METER



SPECIFICATIONS

ELECTRICITY	3 DC Volts
DIMENSIONS	74 x 52 x 70mm high
WEIGHT	140 g
TEMP. RANGE	0 to 80°C
MAX. PRESSURE	80 psi
CONNECTION	3/8-inch NPT Female

NOT SOLD SEPERATELY

CARTRIDGE HEAD



DIMENSIONS 100 x 124 x 135mm high
NB:NOT SOLD SEPERATELY

WATER FILTRATION SYSTEM REPLACEMENT CARTRIDGE FOR 10/11/16/20 PAN OVENS



DIMENSIONS	136ø x 471mm high
FLOW RATE	3.7 LPM
PRESSURE	29 – 116 psi
TEMP. RANGE	4 – 30°C

ORDER CODE **WFS0000-XL-RC**



DIMENSIONS	136ø x 360mm high
FLOW RATE	4 LPM
PRESSURE	29 – 116 psi
TEMP. RANGE	4 – 30°C

ORDER CODE **WFS0000-L-RC**



DISHWASHER BASKETS

*NOTE: All Baskets dimensions are
500 x 500 x 100mm deep*

16 COMPARTMENT

ORDER CODE DWB-GR0016



20 COMPARTMENT

ORDER CODE DWB-GR0020



25 COMPARTMENT

ORDER CODE DWB-GR0025



36 COMPARTMENT

ORDER CODE DWB-GR0036




EXTENDERS

*NOTE: All Extenders dimensions are
500 x 500 x 45mm deep*


16 COMP EXTENDER

ORDER CODE DWB-GR0016E



OPEN EXTENDER

ORDER CODE DWB-EX0000

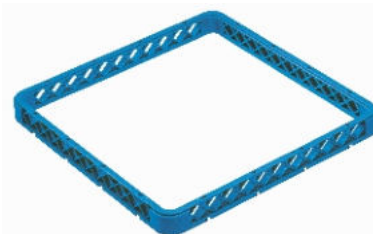

25 COMP EXTENDER

ORDER CODE DWB-GR0025E



36 COMP EXTENDER

ORDER CODE DWB-GR0036



DISHWASHER BASKETS

CUTLERY BASKET

DIMENSIONS 500 x 500 x 100 mm deep
ORDER CODE **DWB-CR0000**



1 COMP CUTLERY BASKET

DIMENSIONS 107 x 107 x 139 mm deep
ORDER CODE **DWB-CH0001**



8 COMP CUTLERY BASKET

DIMENSIONS 427 x 208 x 151 mm deep
ORDER CODE **DWB-CH0008**



RACKS

64 PEG PLATE RACK

DIMENSIONS 500 x 500 x 100mm deep
ORDER CODE **DWB-AP0064**



RACK COVER

COMPATIBLE WITH ALL BASKETS
ORDER CODE **DWB-RC0000**



RACK DOLLY WITH HANDLE

DIMENSIONS 540 x 540 x 785 mm high
ORDER CODE **DWB-RD0000**



CAMBRO®

TRUSTED DURABILITY



● FOOD STORAGE ● INSULATED FOOD TRANSPORT



INSULATED FOOD PAN CARRIER

MODEL	Cambro UPC1600
DIMENSIONS	715 x 820 x 1350mm high
WEIGHT	56kg
INTERNAL DIMENSIONS	535 x 665 x 535mm high
CAPACITY	(24x) 650mm deep 1/1 GN Pans (16x) 100mm deep 1/1 GN Pans (12x) 150mm deep 1/1 GN Pans (8x) 200mm deep 1/1 GN Pans Also holds 1/2 and 1/3 GN Pans

ORDER CODE CAM-UPC1600



INSULATED FOOD PAN CARRIER

MODEL	Cambro UPC800
DIMENSIONS	520 x 690 x 1370mm high
WEIGHT	16kg
INTERNAL DIMENSIONS	330 x 545 x 485mm high
CAPACITY	(12x) 650mm deep 1/1 GN Pans (8x) 100mm deep 1/1 GN Pans (6x) 150mm deep 1/1 GN Pans (4x) 200mm deep 1/1 GN Pans

ORDER CODE CAM-UPC800



FOOD PAN CARRIER DOLLY

MODEL	Cambro CD400
DIMENSIONS	535 x 714 x 228mm high
CAPACITY	135kg
COMPATIBLE WITH	Cambro UPC400

ORDER CODE CAM-CD400



INSULATED BEVERAGE SERVER

MODEL	Cambro LCD500
DIMENSIONS	420 x 230 x 620 mm high
WEIGHT	7kg
CAPACITY	18L

ORDER CODE CAM-500LCD



A global brand you can trust





DISPLAY FREEZER TABLE MODEL

MODEL	CRYSTAL CRTF 70
ELECTRICITY	0.53kW, 230V, Single Phase
INTERNAL DIMENSIONS	430 x 440 x 480mm high
EXTERNAL DIMENSIONS	566 x 542 x 628mm high
WEIGHT	40kg
CAPACITY	73Lt
TEMPERATURE RANGE	-18 ~ -22°C
REFRIGERANT GAS	R290

ORDER CODE

CRYGR-CRTF70



GELATO STORAGE FREEZER

MODEL	CRYSTAL GELOBOX
ELECTRICITY	0.53kW, 230V, Single Phase
INTERNAL DIMENSIONS	547 x 775 x 1553mm high
EXTERNAL DIMENSIONS	667 x 895 x 2020mm high
WEIGHT	121kg
CAPACITY	(66x) Ice cream container set
TEMPERATURE RANGE	-15 ~ -25°C
REFRIGERANT GAS	R290

ORDER CODE

CRYGR-GELOBOX





- High quality glass & stainless steel body
- Dixell digital temperature control
- Heavy duty Embraco compressor
- Includes 3 fixed stainless steel shelves
- LED lighting for each level
- Stainless steel front guard
- Includes retractable curtain
- Fitted with (4x) castors

MODEL	Galileo YLK240L
ELECTRICITY	1.3kW, 220V, Single Phase
DIMENSIONS	535 x 600 x 1830mm high
WEIGHT	110kg
CAPACITY	240Lt
SHELF DIMENSIONS	(3x) 480 x 270mm
TEMPERATURE RANGE	4 ~ 10°C
REFRIGERANT GAS	R404

ORDER CODE **OCG/YLK240L**

- AISI 304 Stainless steel & glass finish, easy to maintain & clean
- High strength, tempered glass
- Includes two adjustable, high gage, stainless steel wire shelves
- Removable, glass sliding back doors
- Low heat output, LED light strips
- Digital controls and temperature display
- Fitted with (4x) adjustable feet



MODEL	Galileo WTY110L
ELECTRICITY	0.2kW, 220V, Single Phase
DIMENSIONS	750 x 560 x 680mm high
WEIGHT	63kg
CAPACITY	110Lt
SHELF DIMENSIONS	640 x 240mm
	640 x 290mm
TEMP. RANGE	2 ~ 8°C
REFRIGERANT GAS	R290

ORDER CODE **DCG/WTY110L**



MODEL	Galileo WTY130L
ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	900 x 560 x 680mm high
WEIGHT	72kg
CAPACITY	130Lt
SHELF DIMENSIONS	790 x 240mm
	790 x 290mm
TEMP. RANGE	2 ~ 8°C
REFRIGERANT GAS	R290

ORDER CODE **DCG/WTY130L**



MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
CAPACITY
TEMP. RANGE
REFRIGERANT GAS

Galileo WDF157D
0.8kW, 240V, Single Phase
1500 x 750 x 1350mm high
241kg
552Lt
-2 ~ 8°C
R290

ORDER CODE

DCG/WDF157D



MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
CAPACITY
TEMP. RANGE
REFRIGERANT GAS

Galileo WDF127D
0.74kW, 240V, Single Phase
1200 x 750 x 1350mm high
203kg
365Lt
2 ~ 8°C
R290

ORDER CODE

DCG/WDF127D



MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
CAPACITY
TEMP. RANGE
REFRIGERANT GAS

Galileo WDF097D
0.53kW, 240V, Single Phase
900 x 750 x 1350mm high
173kg
269Lt
0 ~ 8°C
R290

ORDER CODE

DCG/WDF097D



900mm

MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
CAPACITY
TEMPERATURE RANGE
REFRIGERANT GAS

Galileo WHY160L
1.6kW, 220V, Single Phase
900 x 580 x 678mm high
49kg
160Lt
30 ~ 90°C
R290

ORDER CODE

DCG/WHY160L



700mm

MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
CAPACITY
TEMPERATURE RANGE
REFRIGERANT GAS

Galileo WHY125L
1.2kW, 220V, Single Phase
700 x 580 x 678mm high
43kg
125Lt
30 ~ 90°C
R290

ORDER CODE

DCG/WHY125L





1200mm

MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
SHELF DIMENSIONS

CAPACITY
TEMPERATURE RANGE
REFRIGERANT GAS

IGLOO LUNA 120
1,5kW, 230V, Single Phase
1200 x 660 x 1440mm high
155kg
1140 x 250mm
1140 x 340mm
1140 x 400mm
370Lt
2 ~ 10°C
R290

ORDER CODE

IGL5013



900mm

MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
SHELF DIMENSIONS

CAPACITY
TEMPERATURE RANGE
REFRIGERANT GAS

IGLOO LUNA 90
1,4kW, 230V, Single Phase
900 x 660 x 1440mm high
137kg
820 x 250mm
820 x 340mm
820 x 400mm
270Lt
2 ~ 10°C
R290

ORDER CODE

IGL5009





MODULAR ICE MACHINES





WITH REFRIGERATED HOPPER



& AIR PUMP

FLOOR STANDING

MODEL	SQL922-RH-AP
ELECTRICITY	2kW, 230V, Single Phase
DIMENSIONS	550 x 700 x 1330mm high
WEIGHT	140kg
HOPPER CAPACITY	(2x) 5.8Lt
OUTPUT PER HOUR	180 cones
REFRIGERANT GAS	R404

ORDER CODE

SSM0002



REFRIGERATION



MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
PRODUCTION CAPACITY
REFRIGERANT GAS

PolarCab LB400TA
1kW, 230V, Single Phase
520 x 700 x 620mm high
64kg
160kg/h
R404a

ORDER CODE

IMP/LB400TA



MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
PRODUCTION CAPACITY
REFRIGERANT GAS

PolarCab LB700TA
1.5kW, 230V, Single Phase
770 x 715 x 685mm high
85kg
300kg/h
R404a

ORDER CODE

IMP/LB700TA



MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
PRODUCTION CAPACITY
REFRIGERANT GAS

PolarCab LB1000TA
3.8kW, 230V, Single Phase
765 x 685 x 795mm high
110kg
450kg/h
R404a

ORDER CODE

IMP/LB1000TA

REFRIGERATION



ICE BINS



MODEL
DIMENSIONS
WEIGHT
CAPACITY
COMPATIBLE ICE MACHINE

PolarCab LB140B
585 x 990 x 920mm high
34kg
140kg
LB400TA

ORDER CODE IMP/BIN/LB140B



MODEL
DIMENSIONS
WEIGHT
CAPACITY
COMPATIBLE ICE MACHINE

PolarCab LB200B
785 x 930 x 1000mm high
44kg
200kg
LB700TA

ORDER CODE IMP/BIN/LB200B



MODEL
DIMENSIONS
WEIGHT
CAPACITY
COMPATIBLE ICE MACHINE

PolarCab LB600B
1230 x 945 x 1100mm high
74kg
600kg
LB1000TA

ORDER CODE IMP/BIN/LB600B





3 TRAY

MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
RUNNER SPACING
CAPACITY
BLAST CHILL PERFORMANCE
SHOCK FREEZE PERFORMANCE
REFRIGERANT GAS

PolarCab EBF - 03
1.1kW, 230V, Single Phase
755 x 832 x 581mm high
72kg
65mm
(3x) 1/1 GN trays (55mm deep)
(3x) 600 x 400mm trays
10kg, 90 ~ 3°C in 90min
5kg, 90 ~ -18°C in 240min
R290

ORDER CODE PCY/EBF-03



5 TRAY

MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
RUNNER SPACING
CAPACITY
BLAST CHILL PERFORMANCE
SHOCK FREEZE PERFORMANCE
REFRIGERANT GAS

PolarCab EBF - 05
1.3kW, 230V, Single Phase
750 x 815 x 870mm high
89kg
65mm
(5x) 1/1 GN trays (55mm deep)
(5x) 600 x 400mm trays
25kg, 90 ~ 3°C in 90min
15kg, 90 ~ -18°C in 240min
R290

ORDER CODE PCY/EBF-05



10 TRAY

MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
RUNNER SPACING
CAPACITY
BLAST CHILL PERFORMANCE
SHOCK FREEZE PERFORMANCE
REFRIGERANT GAS

PolarCab EBF -10
2.5kW, 230V, Single Phase
750 x 830 x 1435mm high
140kg
178mm
(10x) 1/1 GN trays (55mm deep)
(10x) 600 x 400mm trays
50kg, 90 ~ 3°C in 90min
30kg, 90 ~ -18°C in 240min
R290

ORDER CODE PCY/EBF-05

REFRIGERATED STAINLESS STEEL STORAGE CABINETS



120 LITRE *FREEZER*

MODEL	PolarCab SF12VS
ELECTRICITY	0.17kW, 220V, Single Phase
DIMENSIONS	600 x 600 x 850mm high
INTERNAL DIMENSIONS	460 x 410 x 465mm high
GROSS VOLUME	120Lt
GRID SUPPLIED	3
WEIGHT	52kg
TEMPERATURE RANGE	-18 ~ -22°C
REFRIGERANT GAS	R600a
ORDER CODE	PCG/SF12VS



300 LITRE *FREEZER*

MODEL	PolarCab SF30VS
ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	600 x 600 x 1860mm high
INTERNAL DIMENSIONS	460 x 460 x 1627mm high
GROSS VOLUME	300Lt
GRID SUPPLIED	4
WEIGHT	100kg
TEMPERATURE RANGE	-18 ~ -22°C
REFRIGERANT GAS	R290
ORDER CODE	PCG/SF30VS

120 LITRE *FRIDGE*

MODEL	PolarCab SR12S
ELECTRICITY	0.14kW, 220V, Single Phase
DIMENSIONS	600 x 600 x 850mm high
INTERNAL DIMENSIONS	460 x 410 x 645mm high
GROSS VOLUME	120Lt
GRID SUPPLIED	3
WEIGHT	48kg
TEMPERATURE RANGE	2 ~ -8°C
REFRIGERANT GAS	R600a
ORDER CODE	PCG/SR12S

300 LITRE *FRIDGE*

MODEL	PolarCab SR30VS
ELECTRICITY	0.18kW, 220V, Single Phase
DIMENSIONS	600 x 600 x 1860mm high
INTERNAL DIMENSIONS	460 x 460 x 1627mm high
GROSS VOLUME	300Lt
GRID SUPPLIED	4
WEIGHT	118kg
TEMPERATURE RANGE	2 ~ 8°C
REFRIGERANT GAS	R600a
ORDER CODE	PCG/SR30VS



REFRIGERATION

REFRIGERATED STAINLESS STEEL
STORAGE CABINETS



300 LITRE FREEZER (GLASS DOOR)

MODEL	PolarCab SF30VGS
ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	600 x 600 x 1850mm high
INTERNAL DIMENSIONS	460 x 460 x 1627mm high
GROSS VOLUME	300Lt
GRID SUPPLIED	5
WEIGHT	115kg
TEMPERATURE RANGE	-18 ~ -22°C
REFRIGERANT GAS	R290
ORDER CODE	PCG/SF30VGS



580 LITRE FREEZER

MODEL	PolarCab SF58VS
ELECTRICITY	0.32kW, 220V, Single Phase
DIMENSIONS	775 x 750 x 1860mm high
INTERNAL DIMENSIONS	635 x 450 x 1627mm high
GROSS VOLUME	580Lt
GRID SUPPLIED	5
WEIGHT	128kg
TEMPERATURE RANGE	-18 ~ -22°C
REFRIGERANT GAS	R290
ORDER CODE	PCG/SF58VS

300 LITRE FRIDGE (GLASS DOOR)

MODEL	PolarCab SR30VGS
ELECTRICITY	0.18kW, 220V, Single Phase
DIMENSIONS	600 x 600 x 1860mm high
INTERNAL DIMENSIONS	460 x 460 x 1627mm high
GROSS VOLUME	300Lt
GRID SUPPLIED	4
WEIGHT	103kg
TEMPERATURE RANGE	2 ~ 8°C
REFRIGERANT GAS	R600a
ORDER CODE	PCG/SR30VGS

580 LITRE FRIDGE

MODEL	PolarCab SR58VS
ELECTRICITY	0.24kW, 220V, Single Phase
DIMENSIONS	775 x 750 x 1860mm high
INTERNAL DIMENSIONS	635 x 460 x 1627mm high
GROSS VOLUME	580Lt
GRID SUPPLIED	4
WEIGHT	90kg
TEMPERATURE RANGE	2 ~ 8°C
REFRIGERANT GAS	R600a
ORDER CODE	PCG/SR58VS



SUSHI DISPLAY FRIDGE



6 DIVISION

MODEL PolarCab RTS-83L
ELECTRICITY 0.16kW, 230V, Single Phase
DIMENSIONS 1483 x 450 x 330mm high
GROSS VOLUME 83Lt
CAPACITY (6x) 1/3 GN Inserts
40mm deep
WEIGHT 39kg
TEMP. RANGE 0 ~ 12°C
REFRIGERANT GAS R290a
ORDER CODE PCG/RTS-83L

7 DIVISION

MODEL PolarCab RTS-103L
ELECTRICITY 0.16kW, 230V, Single Phase
DIMENSIONS 1754 x 450 x 330mm high
GROSS VOLUME 103Lt
CAPACITY (6x) 1/3 + 1/2 GN Inserts
40mm deep
WEIGHT 44kg
TEMP. RANGE 0 ~ 12°C
REFRIGERANT GAS R290a
ORDER CODE PCG/RTS-103L



BULLET ICE MAKER




MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
PRODUCTION CAPACITY
STORAGE CAPACITY
REFRIGERANT GAS

ORDER CODE

GDZB-28
0.19kW, 220V, Single Phase
330 x 503 x 607mm high
27Kg
28kg/24h
5kg
R290a

IMPGD/ZB-2S



REFRIGERATION



56 LITRE

MODEL Galileo SC-58
ELECTRICITY 0.15kW, 230V, Single Phase
DIMENSIONS 434 x 398 x 854mm high
GROSS VOLUME 56Lt
GRID SUPPLIED 2
WEIGHT 37kg
TEMP. RANGE 2 ~ -12°C
REFRIGERANT GAS R600a

ORDER CODE White **PCG/SC-58W**
Black **PCG/SC-58B**

74 LITRES

MODEL Galileo SC-78
ELECTRICITY 0.15kW, 230V, Single Phase
DIMENSIONS 434 x 398 x 1004mm high
GROSS VOLUME 74Lt
GRID SUPPLIED 3
WEIGHT 42kg
TEMP. RANGE 2 ~ 8°C
REFRIGERANT GAS R600a

ORDER CODE White **PCG/SC-78W**
Black **PCG/SC-78B**

92 LITRES

MODEL Galileo SC-98
ELECTRICITY 0.2kW, 230V, Single Phase
DIMENSIONS 434 x 398 x 1154mm high
GROSS VOLUME 92Lt
GRID SUPPLIED 4
WEIGHT 48kg
TEMP. RANGE 2 ~ -12°C
REFRIGERANT GAS R600a

ORDER CODE White **PCG/SC-98W**
Black **PCG/SC-98B**

279 LITRES

MODEL Galileo SC-278
ELECTRICITY 0.3kW, 230V, Single Phase
DIMENSIONS 515 x 553 x 1800mm high
GROSS VOLUME 279Lt
GRID SUPPLIED 5
WEIGHT 86kg
TEMP. RANGE 2 ~ -12°C
REFRIGERANT GAS R290

ORDER CODE White **PCG/SC-278W**
Black **PCG/SC-278B**



ROTATING CAKE DISPLAY



COUNTER TOP 3 TIER, ROTATING

MODEL	Galileo ARC-100R
ELECTRICITY	0.21kW, 230V, Single Phase
DIMENSIONS	480 x 480 x 1030mm high
WEIGHT	50kg
VOLUME	100Lt
TEMP. RANGE	2 ~ 8°C
REFRIGERANT GAS	R600a

ORDER CODE DCG/ARC-100R



FLOOR STANDING 5 TIER, ROTATING

MODEL	Galileo ARC-400R
ELECTRICITY	0.46kW, 230V, Single Phase
DIMENSIONS	680 x 680 x 1750mm high
WEIGHT	140kg
VOLUME	400Lt
TEMP. RANGE	2 ~ 8°C
REFRIGERANT GAS	R290a

ORDER CODE DCG/ARC-400R



REFRIGERATION




Bravida





MODEL	Bravida RB-686P
ELECTRICITY	2.1kW, 230V, Single Phase
DIMENSIONS	200 x 350 x 400mm high
CAPACITY	1.8 Lt
WEIGHT	5.8kg
BREWING TEMPERATURE	93 ~ 96°C
HEATING PLATE TEMPERATURE	80°C
BREWING TIME	100 cups/hr

ORDER CODE CMB1018

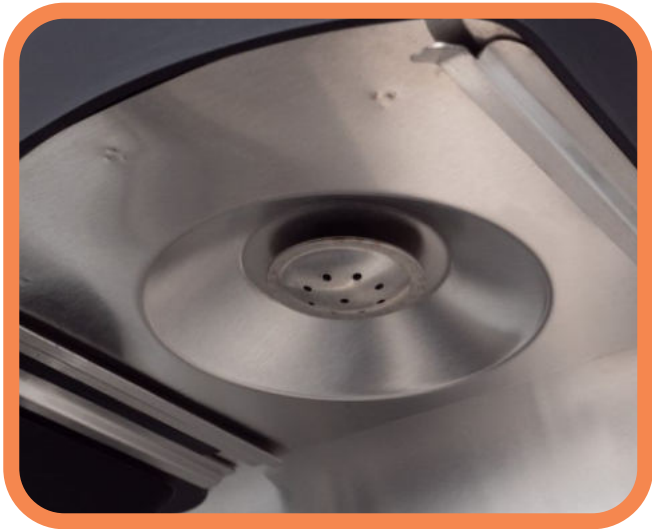

BEVERAGE

HOT CHOCOLATE MACHINE



- 5 Litre capacity
- Modern design
- Mixes while heating up
- Temperature 30°C ~ 90°C
- Digital control panel
- Temperature display function
- Disassembles for easy cleaning
- Dimensions - 320 x 400 x 470mm

MODEL	PolaCab CH5L
ELECTRICITY	0.4kW, 230V, Single Phase
DIMENSIONS	400 x 320 x 470mm high
WEIGHT	6kg
CAPACITY	5Lt
TEMP. RANGE	30 ~ 90°C

ORDER CODE HCP0005



BEVERAGE



**SUPPLIED
WITH A
STAINLESS STEEL
COFFEE
STRAINER**



18 LITRE

MODEL Caterlot 0018
ELECTRICITY 1.5kW, 220V, Single Phase
DIMENSIONS Ø310 x 581mm high
WEIGHT 5kg
CAPACITY 18Lt

Stainless Steel
Matt Black

**CBC0018
CBC0018-B**

14 LITRE

MODEL Caterlot 0014
ELECTRICITY 1.5kW, 220V, Single Phase
DIMENSIONS Ø310 x 517mm high
WEIGHT 4kg
CAPACITY 14Lt

Stainless Steel
Matt Black

**CBC0014
CBC0014-B**

8 LITRE

MODEL Caterlot 0008
ELECTRICITY 0.95kW, 220V, Single Phase
DIMENSIONS Ø230 x 504mm high
WEIGHT 3kg
CAPACITY 8Lt

Stainless Steel
Matt Black

**CBC0008
CBC0008-B**

REMOVABLE DRIP TRAY



TWIST-LOCK LID



COOL-TOUCH HANDLES





SINGLE HEAD

MODEL	PolarCab RL3x1
ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	240 x 490 x 545mm high
VOLUME	3Lt
WEIGHT	19kg
TEMP. RANGE	-10 ~ 10°C
REFRIGERANT GAS	R290

ORDER CODE **SMP0103**





DOUBLE HEAD

MODEL	PolarCab RL3x2
ELECTRICITY	0.4kW, 220V, Single Phase
DIMENSIONS	390 x 490 x 545mm high
VOLUME	(2x) 3Lt
WEIGHT	27kg
TEMP. RANGE	-10 ~ 10°C
REFRIGERANT GAS	R290

ORDER CODE **SMP0203**





 **SmartChef** * **IGLOO**  **arisco**  **CRYSTAL**
 **SMARTBLEND** *Goshen*  **POLARCAAB**  **omniWASH** **SmartWay**
CAMBRO  **CaterLot** **prismafood**
prismafood  **EMPERO** **omake**  **T&S**
 **BakeMark** *CookRite* **inoxserv** *Galileo*  **CRYSTAL**

