

CATERING EQUIPMENT CATALOGUE

2022-23

EDITION #1



QUICK NAVIGATION

FOOD PREPARATION 4 - 19

PACKAGING 20 - 25

COOKING EQUIPMENT 26 - 89

BEVERAGE 90 - 103

WASHING & HARDWARE 104 - 115

BUFFET WARE 116 - 127

REFRIGERATION 128 - 149

DISPLAY & RETAIL 150 - 167

HOLDING & DISTRIBUTION 168 - 185

STORAGE & HANDLING SOLUTIONS 186 - 195

WHAT DOES IT MEAN?



Baking trays per deck



Gas equipment



Pizza bases per deck



Electric equipment



Packed weight & dimensions

 ***BakeMark***



 SMARTBLEND

Smoothies
Cocktails
Shakes
Soups
Puree



VORTEX_{SC}



VORTEX



STORM

SECTION INDEX

Blades for Veg prep machine	6
Blenders	7
Bowl Cutters	8
Bread mixers	15
Cake mixers	12-14
Chip cutters	9
Cold meat slicers	11
Dough divider & rounder	17
Dough mixers	15-16
Dough rollers	18
Dough sheeters	19
Food processors	8
Fry cutters	9
Kitchen assistant	12
Meat slicers	11
Mixers	12-16
Pastry sheeters	19
Pizza dough rollers	18
Planetary mixers	12-14
Polony slicers	11
Potato chippers	9
Slicers	11
Smoothie makers	7
Spiral dough mixers	15-16
Spiral potato cutter	10
Vegetable preparation machines	6





FEATURES

- Aluminium and magnesium alloy body
- Fitted with a safety micro switch to stop operation when cover is opened
- Ventilated motor, allowing continuous operation
- Motor thermal protection against over heating
- Removable hinged lid equipped with a large half moon hopper and cylindrical hopper
- Rounded edges for easy cleaning
- Easy to operate
- Feeder stick and cleaning brush included
- Fitted with (4x) non-slip rubber feet

SPECIFICATIONS

MODEL	SmartChef HLC-300
ELECTRICITY	0.55kW, 220V, Single Phase
DIMENSIONS	200 x 490 x 500mm high
WEIGHT	23kg
SPEED	375rpm - Single speed
HOPPER DIM	Large half moon - 104cm ² Cylindrical 58mm diameter
BLADES INCLUDED	2mm slicer 4mm slicer 2mm grater 3mm grater 7mm grater

ORDER CODE

VPS0001



OPTIONAL BLADES

GRATING BLADES



CUT DIM.	ORDER CODE
3mm	VPS1003
4mm	VPS1004
7mm	VPS1007

JULIENNE BLADES



CUT DIM.	ORDER CODE
2.5mm	VPS5025
4mm	VPS5004
8mm	VPS5008
10mm	VPS5010

SLICING BLADES



CUT DIM.	ORDER CODE
2mm	VPS2002
4mm	VPS2004
8mm	VPS2008
10mm	VPS2010
14mm	VPS2014


CURVED SLICING BLADES



CUT DIM.	ORDER CODE
1mm	VPS3001
2mm	VPS3002
5mm	VPS3005

CHIPPING BLADES

must be used with a slicing disk



CUT DIM.	ORDER CODE
8mm	VPS4008
10mm	VPS4010

DICING BLADES

must be used with a slicing disk



CUT DIM.	ORDER CODE
8mm	VPS6008
10mm	VPS6010
12mm	VPS6012
20mm	VPS6020

EJECTOR PLATE

ORDER CODE	VPS9000
------------	---------



FEATURES

- Modern design ABS housing with an “unbreakable” food grade Polycarbonate jar
- Easy to use digital touch control panel with various speed, time and pulse action
- Polycarbonate soundproof cover to reduce noise
- Fitted with a stainless steel blade assembly
- Removable dosing cup and stir bar included
- Fitted with an over-heat, auto shut-off safety function
- Industrial grade, heavy duty motor with pure copper coil
- Housing fitted with non-slip base

WITH SOUND COVER

SPECIFICATIONS

MODEL	SmartBlend VORTEX SC 1680C
ELECTRICITY	1.68kW, 220V, Single Phase
DIMENSIONS	230 x 250 x 540mm high (closed) 230 x 250 x 790mm high (open)
WEIGHT	9kg
SPEED	32 000rpm - Touch control
JAR CAPACITY	2Lt

ORDER CODE

BSB1680C/C



FEATURES

- ABS housing with “unbreakable” food grade Polycarbonate jar
- Precision blending with pulse action
- Fitted with an over-heat, auto shut-off safety function
- Industrial grade, heavy duty motor with pure copper coil
- Variable speed control
- Fitted with a stainless steel blade assembly
- Removable dosing cup and stir bar included
- Housing fitted with non-slip base



SPECIFICATIONS

MODEL	SmartBlend VORTEX 1680
ELECTRICITY	1.68kW, 220V, Single Phase
DIMENSIONS	230 x 250 x 520mm high
WEIGHT	6kg
SPEED	32 000rpm - Analog control
JAR CAPACITY	2Lt

ORDER CODE

BSB1680



SPECIFICATIONS

MODEL	SmartBlend STORM 112
ELECTRICITY	1.1kW, 220V, Single Phase
DIMENSIONS	225 x 210 x 490mm high
WEIGHT	4kg
SPEED	26 000rpm - Analog control
JAR CAPACITY	2Lt

ORDER CODE

BSB0112

OPTIONAL EXTRAS

2Lt JAR & TAMPER

Compatible with - VORTEX SC 1680C & VORTEX 1680

ORDER CODE

BSB1680-JAR2L

2Lt JAR & TAMPER

Compatible with - STORM 112

ORDER CODE

BSB0112-JAR2L

FEATURES

- Robust stainless steel body and bowl
- Lid is fitted with a large dosing cup to easily add liquid
- EMP.SD.01Y - Digital push stop/start button
- Fitted with a safety switch
- Transparent cover for easy viewing of product
- Easy removable cutting bowl and blades
- EMP.SD.15 - Double circuit timer with digital control panel
- Fitted with (4x) non-slip feet



8 LITRE TABLE MODEL

SPECIFICATIONS

MODEL	Empero SD.01Y
ELECTRICITY	0.37kW, 220V, Single Phase
DIMENSIONS	295 x 490 x 365mm high
WEIGHT	20kg
SPEED	1400rpm - Single speed
BOWL DIM	240 x 180mm deep
BOWL CAPACITY	8Lt

ORDER CODE

EMP.SD.01Y



15 LITRE TABLE MODEL

SPECIFICATIONS

MODEL	Empero SD.15
ELECTRICITY	0.90kW, 380V, 3 Phase + N
DIMENSIONS	380 x 625 x 515mm high
WEIGHT	46kg
SPEED	750 ~ 1500rpm
BOWL DIM	290 x 220mm deep
BOWL CAPACITY	15Lt

ORDER CODE

EMP.SD.15



FEATURES

- Robust stainless steel body and bowl
- Transparent cover for easy viewing of the product
- Lid is fitted with a large dosing cup to easily add liquid
- Easy removable blade and bowl
- Fitted with a bowl tilting mechanism
- Double circuit timer and digital control panel
- Fitted with a safety switch

50 LITRE FLOOR STANDING

SPECIFICATIONS

MODEL	Empero SD.09
ELECTRICITY	5.5kW, 380V, 3 Phase + N
DIMENSIONS	720 x 685 x 1245mm high
WEIGHT	70kg
SPEED	750 ~ 1500rpm
BOWL DIM	400 x 400mm
BOWL CAPACITY	50Lt

ORDER CODE

EMP.SD.09



FEATURES

- Heavy-duty, nickel-plated ductile cast iron frame and handle
- Clean and durable stainless steel "V" trough for smooth operation
- Sure grip handle
- 290mm long at base
- 160mm height opening for loading vegetables
- Screw holes on base of legs for permanent mounting to table or wall
- Optional wall bracket available for ease of operation

SPECIFICATIONS

DIMENSIONS 340 x 210 x 350mm high
WEIGHT 7kg

MODEL Vollrath 47713
CUT SIZE 7mm
ORDER CODE **FCV0007**

MODEL Vollrath 47715
CUT SIZE 11mm
ORDER CODE **FCV0011**

OPTIONAL WALL BRACKET
ORDER CODE

FCV0000



FEATURES

- Heavy-duty, cast aluminum frame and handle
- Clean and durable stainless steel "V" trough for smooth operation
- Sure grip handle
- Screw holes on base of legs for permanent mounting to table or wall
- Supplied with 8, 10 and 12mm interchangeable blade sets
- Optional wall bracket available for ease of operation

SPECIFICATIONS

MODEL SmartChef HC-02
DIMENSIONS 430 x 220 x 330mm high
CUT SIZE 8/10/12mm
WEIGHT 3.5kg
ORDER CODE **FCS0009**

OPTIONAL WALL BRACKET

ORDER CODE **WBS0000**



FEATURES

- Heavy-duty, cast aluminum frame and handle
- Easy interchangeable block and blade
- Easy to operate
- Maximum potato size - 150mm
- Fitted with a heavy-duty spring
- Optional chipper bridge available

SPECIFICATIONS

DIMENSIONS 330 x 140 x 640mm high
WEIGHT 4kg

MODEL SmartChef HC-01/6
CUT HOLES & SIZE 6 x 6 / 14mm
ORDER CODE **CHS0006**

MODEL SmartChef HC-01/7
CUT HOLES & SIZE 7 x 7 / 12mm
ORDER CODE **CHS0007**

OPTIONAL CHIPPER BRIDGE

ORDER CODE **CBS0000**

SPIRAL POTATO CUTTER

SmartChef



FEATURES

- Manufactured from stainless steel
- Fitted with a replaceable stainless steel blade
- Fixed shaft with hole for the bamboo sign
- Fitted with (4x) non-slip rubber feet

SPECIFICATIONS

MODEL SmartChef HSP-01
DIMENSIONS 340 x 130 x 140mm high
WEIGHT 1kg

ORDER CODE

SPC0001



DURABLE HANDLE



NON-SLIP BASE



STAINLESS STEEL BLADES



FIXED SHAFT WITH HOLE



FIXED LOCK



SPIRAL SHAFT

SPIRAL POTATOES IN 4 EASY STEPS

1



INSERT BAMBOO SIGN
THROUGH POTATO

2




INSERT POTATO
INTO SPIRAL CUTTER

3



ROTATE HANDLE UNTIL
CUT THROUGH

4



REMOVE,
FRY AND SERVE



FEATURES

- The slicer is built with polished cast aluminum
- Easy to use and clean with little maintenance
- Double ball bearing blade support
- Double stone sharpening accessory included
- Strong fan silenced with professional motor
- Very sturdy design
- The blade is made from non-sticking steel
- Sliding carriage on Teflon bushings with a heavy duty food holder
- Two button on-off switch
- Fitted with 4 non-slip feet



SPECIFICATIONS

MODEL	Celme FY220
ELECTRICITY	0.16kW, 220V, Single Phase
DIMENSIONS	440 x 360 x 330mm high
WEIGHT	10kg
BLADE DIAMETER	220mm
SLICE THICKNESS	0 ~ 16mm
USEFUL CUT	220 x 165mm

ORDER CODE

MSC0220



SPECIFICATIONS

MODEL	Celme Family 275
ELECTRICITY	0.16kW, 220V, Single Phase
DIMENSIONS	530 x 420 x 390mm high
WEIGHT	15kg
BLADE DIAMETER	275mm
SLICE THICKNESS	0 ~ 16mm
USEFUL CUT	230 x 180mm

ORDER CODE

MSC0275



SPECIFICATIONS

MODEL	Celme Family 300
ELECTRICITY	0.22kW, 220V, Single Phase
DIMENSIONS	580 x 470 x 420mm high
WEIGHT	21kg
BLADE DIAMETER	300mm
SLICE THICKNESS	0 ~ 16mm
USEFUL CUT	245 x 195mm

ORDER CODE

MSC0300





SUPPLIED WITH

- 7Lt stainless steel beater bowl
- Polyethylene bowl cover
- Dough scraper & spatula
- 3.5Lt clear plastic beater bowl
- Dough roller
- Balloon whisk
- Dough hook
- Cookie beater

FEATURES

- Cast aluminum body
- The open bowl makes it easy to add ingredients and see the dough
- The bowl spins on the assistant base
- The weighted base bottom creates stability
- Multi functional - more than 16 different functions
- Fitted with 12 minute timer
- Variable speed control

SPECIFICATIONS

MODEL	Ankarsrum Assistant Original
ELECTRICITY	1.5kW, 220V, Single Phase
DIMENSIONS	270 x 360 x 370mm high
WEIGHT	9kg
DRY FLOUR CAPACITY	3kg
CAPACITY	7Lt / 5kg
PLANETARY SPEED	45 ~ 130rpm

ORDER CODE

AKM6230



OPTIONAL EXTRAS



DELUXE PACKAGE INCLUDES

- 3 Sausage horns 10 / 20 / 25mm
- Feeder tray & feeder plug
- 4 x hole discs plates 2.5 / 4.5 / 6 / 8mm
- Mincer
- Grater
- Cookie attachment
- Citrus press
- Strainer
- Pasta discs
- Blender jug
- Splash guard for mincer

ORDER CODE

AKM920900067

INDIVIDUAL ATTACHMENTS



Meat mincer & sausage
horn 10 / 20 / 25mm
AKM920900057



Hole discs for mincer
2,5 / 4,5 / 6 / 8mm
AKM920900052/3/4/5



Grater attachment for
mincer
AKM920900034



Strainer attachment
for mincer
AKM920900033



Cookie attachment
for mincer
AKM920900035



Pasta discs for mincer
AKM920900036



1.5Lt Blender jug
AKM920900066



1.2Lt Citrus press
AKM920900026



Vegetable cutter
AKM920900043



Extra grating drums
AKM920900044



Pasta roller - Lasagne
AKM920900063



Pasta cutter - Fettuccine
AKM920900064



Pasta cutter - Spaghetti
AKM920900065



Flour and coffee grinder
AKM920900045



Flake mill
AKM920900046

COLOUR OPTIONS



MATTE BLACK
AKM6230B



BLACK DIAMOND
AKM6230BD



JUBILEE SILVER
AKM6230JS



ROYAL BLUE
AKM6230RB



OCEAN BLUE
AKM6230OB



FOREST GREEN
AKM6230FG



CREME
AKM6230C



LIGHT CREME
AKM6230CL



MINERAL WHITE
AKM6230MW



RED
AKM6230R



PURE ORANGE
AKM6230PO



SUNBEAM YELLOW
AKM6230SY



FEATURES

- All metal construction with enamel coating
- Bowl can be lifted and lowered with the wheel action lifting mechanism
- Fitted with safety guard
- 3 Speed options
- Supplied with 3 attachments:
 - Whisk for stirring liquids and beating eggs
 - Flat beater for mixing soft batter
 - Dough hook for mixing soft dough batter

SUPPLIED ATTACHMENTS



DOUGH HOOK



FLAT BEATER



WIRE WHISK

10 LITRE

SPECIFICATIONS

MODEL	BakeMark B10-BL
ELECTRICITY	0.37kW, 220V, Single Phase
DIMENSIONS	444 x 360 x 650mm high
WEIGHT	50kg
DRY FLOUR CAPACITY	1kg
SPEED	110 / 220 / 420rpm
DRIVE METHOD	Gear

ORDER CODE

PMB0010



20 LITRE

SPECIFICATIONS

MODEL	BakeMark B20-BL
ELECTRICITY	1.1kW, 220V, Single Phase
DIMENSIONS	513 x 405 x 762mm high
WEIGHT	65kg
DRY FLOUR CAPACITY	3kg
SPEED	110 / 220 / 420rpm
DRIVE METHOD	Gear

ORDER CODE

PMB0020



30 LITRE

SPECIFICATIONS

MODEL	BakeMark B30-B
ELECTRICITY	1.5kW, 220V, Single Phase
DIMENSIONS	545 x 440 x 882mm high
WEIGHT	82kg
DRY FLOUR CAPACITY	6kg
SPEED	110 / 220 / 420rpm
DRIVE METHOD	Gear

ORDER CODE

PMB0030



40 LITRE

SPECIFICATIONS

MODEL	BakeMark B40-B
ELECTRICITY	2kW, 220V, Single Phase
DIMENSIONS	620 x 630 x 1011mm high
WEIGHT	150kg
DRY FLOUR CAPACITY	8kg
SPEED	65 / 102 / 296rpm
DRIVE METHOD	Belt

ORDER CODE

PMB0040



SPIRAL DOUGH MIXERS FLOOR STANDING



FEATURES

- Robust construction
- The particular shape of the spiral allows for a perfectly mixed dough
- Bowl, spiral, central column and protection grid is made from stainless steel
- Oil bath gear motor provides a particular silent transmission system
- Fitted with protection grid for increased safety
- Two speed motor is available on request on 3 Phase models
- Fitted with a 60 minute timer
- Fitted with an Emergency Stop switch
- Fitted with non-slip feet

10 LITRE

SPECIFICATIONS

MODEL	BakeMark HS10
ELECTRICITY	0.75kW, 220V, Single Phase
DIMENSIONS	540 x 315 x 770mm high
WEIGHT	60kg
DOUGH WEIGHT	7kg
SHAFT SPEED	250 rpm
BOWL SPEED	25 rpm

ORDER CODE

DMB0010



20 LITRE

SPECIFICATIONS

MODEL	BakeMark BHS20A
ELECTRICITY	1.5kW, 220V, Single Phase
DIMENSIONS	700 x 500 x 770mm high
WEIGHT	75kg
DOUGH WEIGHT	16kg
SHAFT SPEED	125 / 250 rpm
BOWL SPEED	12.5 / 25 rpm

ORDER CODE

DMB0020



30 LITRE

SPECIFICATIONS

MODEL	BakeMark BHS30A
ELECTRICITY	2kW, 220V, Single Phase
DIMENSIONS	770 x 550 x 850mm high
WEIGHT	114kg
DOUGH WEIGHT	25kg
SHAFT SPEED	125 / 250 rpm
BOWL SPEED	12.5 / 25 rpm

ORDER CODE

DMB0030



50 LITRE

SPECIFICATIONS

MODEL	BakeMark HS50
ELECTRICITY	2.2kW, 380V, 3 Phase + N
DIMENSIONS	770 x 550 x 850mm high
WEIGHT	160kg
DOUGH WEIGHT	42kg
SHAFT SPEED	125 / 250 rpm
BOWL SPEED	12.5 / 25 rpm

ORDER CODE

DMB0050



SPIRAL DOUGH MIXERS FLOOR STANDING



FEATURES

- Robust construction
- The particular shape of the spiral allows for a perfectly mixed dough
- Bowl, spiral, central column and protection grid is made from stainless steel
- Oil bath gear motor provides a particular silent transmission system
- Fitted with protection grid for increased safety
- Two speed motor is available on request on 3 Phase models
- Fitted with a 30 minute timer
- Fitted with castors for ease of movement and cleaning

20 LITRE

SPECIFICATIONS

MODEL	Prismafood IBM 20
ELECTRICITY	0.75kW, 220V, Single Phase
DIMENSIONS	430 x 740 x 860mm high
WEIGHT	62kg
DOUGH WEIGHT	17kg
BOWL DIAMETER	360mm
OUTPUT	Up to 56kg per hour

ORDER CODE

DMP1020



30 LITRE

SPECIFICATIONS

DIMENSIONS	440 x 770 x 770mm high
WEIGHT	87kg
DOUGH WEIGHT	25kg
BOWL DIAMETER	400mm
OUTPUT	Up to 88kg per hour

MODEL	Prismafood IBM 30
ELECTRICITY	1.1kW, 220V, Single Phase

ORDER CODE

DMP1030

MODEL	Prismafood IBT 30
ELECTRICITY	1.1kW, 380V, 3 Phase + N

ORDER CODE

DMP3030



50 LITRE

SPECIFICATIONS

MODEL	Prismafood IBT 50
ELECTRICITY	1.5kW, 380V, 3 Phase + N
DIMENSIONS	480 x 790 x 820mm high
WEIGHT	98kg
DOUGH WEIGHT	42kg
BOWL DIAMETER	450mm
OUTPUT	Up to 128kg per hour

ORDER CODE

DMP3050



DOUGH DIVIDER & ROUNDER SEMI-AUTOMATIC



FEATURES

- Heavy duty rigid cast iron construction
- Heat treated enamel finish resists rust, scratches and dents
- Dual stage, semi-automatic operation
- Stainless steel cutting knives, divides dough into 30 equal pieces
- Self-lubricating, enclosed motor for food safety and low maintenance
- The weight of the dough pieces can be adjusted between 30 and 100g
- Includes two divider rounder plates

SPECIFICATIONS

MODEL	BakeMark HLM-30S
ELECTRICITY	0.75kW, 220V, Single Phase
DIMENSIONS	550 x 720 x 1350mm high
WEIGHT	290kg
OUTPUT	30pcs
DOUGH WEIGHT	30 ~ 100g per piece
PROCESSING TIME	10 ~ 13 seconds

ORDER CODE

DDR-HLM-30S



FEATURES

- Machine body manufactured from stainless steel
- Fitted with exclusive, patented automatic "Touch and Go" system. Sensors automatically switch the machine on when the operator puts dough onto the slope
- The working time can be set from 10 - 35 seconds
- Thickness adjustment knob on rollers
- Rollers are protected in transparent plexiglass for maximum safety with optimal visibility
- Easy to operate
- DMA 500/1 - Supplied with an electric foot pedal
- Can be mounted onto a table for increased stability



DOUBLE ROLLER *TILTED*

SPECIFICATIONS

MODEL	Prismafood DSA 420 T.GO
ELECTRICITY	0.25kW, 220V, Single Phase
DIMENSIONS	585 x 330 x 790mm high
WEIGHT	36kg
PIZZA BASE DIAMETER	260 ~ 400mm
BASE THICKNESS	1 ~ 5mm
DOUGH WEIGHT	210 ~ 700gr

ORDER CODE

PRP0040



- Tilted upper roller
- Ideal for round pizza thanks to the presence of the central sling bar



DOUBLE ROLLER *PARALLEL*

SPECIFICATIONS

MODEL	Prismafood DSA 420 RP T.GO
ELECTRICITY	0.25kW, 220V, Single Phase
DIMENSIONS	585 x 330 x 790mm high
WEIGHT	36kg
PIZZA BASE DIAMETER	260 ~ 400mm
BASE THICKNESS	1 ~ 5mm
DOUGH WEIGHT	210 ~ 700g

ORDER CODE

PRP0041



- Parallel rollers
- Ideal for pizza on tray (rectangular shape)



SINGLE ROLLER

SPECIFICATIONS

MODEL	Prismafood DMA 500/1
ELECTRICITY	0.25kW, 220V, Single Phase
DIMENSIONS	650 x 345 x 430mm high
WEIGHT	27kg
PIZZA BASE DIAMETER	260 ~ 450mm
BASE THICKNESS	1 ~ 5mm
DOUGH WEIGHT	210 ~ 700g

ORDER CODE

PRP0050





FEATURES

- Machine body manufactured from stainless steel
- Overload protection and open-phase protection function
- Collapsible for space saving purposes
- Fitted with (4x) casters, 2 lockable



630mm BELT SPECIFICATIONS

MODEL	BakeMark QS-630B
ELECTRICITY	1.1kW, 220V, Single Phase
EXPANDED DIMENSIONS	1000 x 3100 x 1100mm high
STOWED DIMENSIONS	1000 x 720 x 1700mm high
WEIGHT	268kg
MAX. DOUGH CAPACITY	6.5kg
BELT SIZE	630 x 2400mm
ROLLER ADJUSTABLE GAP	1 ~ 40mm

ORDER CODE

PSB-QS-630B



400mm BELT SPECIFICATIONS

MODEL	BakeMark QS-400B
ELECTRICITY	0.4kW, 220V, Single Phase
EXPANDED DIMENSIONS	760 x 2000 x 1040mm high
STOWED DIMENSIONS	760 x 620 x 1310mm high
WEIGHT	160kg
MAX. DOUGH CAPACITY	4kg
BELT SIZE	400 x 1600mm
ROLLER ADJUSTABLE GAP	1 ~ 35mm

ORDER CODE

PSB-QS-400B





SmartVac

SECTION INDEX

Continuous sealers	24
Double chamber vacuum sealers	22
Hand-press impulse sealers	25
Heat sealing machines	25
Horizontal continuous sealers	24
Impulse sealers	25
Single chamber vacuum sealers	23
Vacuum sealers	22-23
Vertical continuous sealers	24
Wrapping machines	25





FEATURES

- External structure and chamber made from stainless steel
- Double alternating chambers increases productivity
- Spring loaded lid stabilising arms for easy operation
- Fitted with stainless steel lid handles
- High density lid gasket for superior sealing during routine work
- Waterproof digital control panel
- Automatic vacuum extraction and sealing
- Can seal multiple types of materials
- Fitted with (4x) castors

500mm SEALING BAR (FLOOR STANDING)

SPECIFICATIONS

MODEL	SmartVac DZ-500/2SB
ELECTRICITY	220V, Single Phase
PUMP / SEAL POWER	2kW / 0.8kW
DIMENSIONS	1250 x 650 x 970mm high
CHAMBER SIZE	(2x) 540 x 420 x 150mm deep
SEALING BAR	(4x) 500 x 10mm
WEIGHT	186kg
OUTPUT	2-6 times/min

ORDER CODE

VPS0500



DOUBLE CHAMBERS

- Work in turns
- Increased efficiency
- More convenience



FEATURES

- External structure and chamber made from stainless steel
- Wide lid opening for easy operation
- Waterproof digital control panel
- DZ450, DZ300 & DZ260C Fitted with 4 non-slip feet

- Clear Plexiglas domed-lid allows for full view of process
- High density lid gasket for superior sealing during routine work
- Automatic vacuum extraction, *gas flushing and sealing
- DZ400 fitted with (4x) castors

* Option available for Models DZ300 and DZ400



400mm SEALING BAR (FLOOR STANDING)



SPECIFICATIONS

ELECTRICITY	220V, Single Phase
PUMP / SEAL POWER	0.9kW / 0.8kW
DIMENSIONS	530 x 490 x 950mm high
CHAMBER SIZE	420 x 440 x 70mm deep
SEALING BAR	(2x) 400 x 10mm
WEIGHT	62kg
OUTPUT	2-4 times/min

WITHOUT GAS FLUSH

MODEL	SmartVac DZ-400
ORDER CODE	VPS0400

WITH GAS FLUSH

MODEL	SmartVac DZ-400G
ORDER CODE	VPS0400-GF

300mm SEALING BAR (TABLE MODEL)



SPECIFICATIONS

ELECTRICITY	220V, Single Phase
PUMP / SEAL POWER	0.3kW / 0.7kW
DIMENSIONS	570 x 460 x 430mm high
CHAMBER SIZE	382 x 320 x 50mm deep
SEALING BAR	300 x 8mm
WEIGHT	38kg
OUTPUT	2-4 times/min

WITHOUT GAS FLUSH

MODEL	SmartVac DZ-300
ORDER CODE	VPS0300

WITH GAS FLUSH

MODEL	SmartVac DZ-300G
ORDER CODE	VPS0300-GF

450mm SEALING BAR (TABLE MODEL)



SPECIFICATIONS

MODEL	SmartVac DZ-450
ELECTRICITY	220V, Single Phase
PUMP / SEAL POWER	0.9kW / 0.8kW
DIMENSIONS	560 x 520 x 460mm high
CHAMBER SIZE	460 x 450 x 220mm deep
SEALING BAR	(2x) 450 x 10mm
WEIGHT	68kg
OUTPUT	2-4 times/min

ORDER CODE	VPS0450
------------	---------

260mm SEALING BAR (TABLE MODEL)



SPECIFICATIONS

MODEL	SmartVac DZ-260C
ELECTRICITY	220V, Single Phase
PUMP / SEAL POWER	0.12kW / 0.4kW
DIMENSIONS	480 x 330 x 320mm high
CHAMBER SIZE	320 x 270 x 57mm deep
SEALING BAR	260 x 8mm
WEIGHT	36kg
OUTPUT	2-4 times/min

ORDER CODE	VPS0260
------------	---------

FEATURES

- This product finishes continuous carrying, sealing and printing in one operation
- Fitted with an electronic constant temperature control system
- Fitted with a stepless speed adjusting transmission mechanism
- Pure aluminum turbine box, polyoxymethylene gear and a high-power 80W copper core motor ensures high power, stable performance, low noise and high efficiency
- Fitted with an emergency stop switch to stop quickly in case of emergency
- Fitted with a pure copper heating block - evenly heated and durable
- The machine is supplied with an embossing wheel and a printing wheel as standard
- The sealing width is 6-12mm, which can be adjusted manually
- Fitted with non-slip feet
- The Vertical continuous sealer allows you to package and seal liquids as well



VERTICAL SPECIFICATIONS

MODEL	SmartVac FR-880-LW
ELECTRICITY	0.85kW, 220V, Single Phase
DIMENSIONS	860 x 420 x 350mm high
WEIGHT	20kg
SEAL WIDTH	6 ~ 12mm
OUTPUT	0 ~ 12m/min
TEMPERATURE RANGE	0 ~ 300°C
MAX LOAD	5kg

ORDER CODE

SMS0880-LW



HORIZONTAL SPECIFICATIONS

MODEL	SmartVac FR-880
ELECTRICITY	0.85kW, 220V, Single Phase
DIMENSIONS	860 x 420 x 350mm high
WEIGHT	19kg
SEAL WIDTH	6 ~ 12mm
OUTPUT	0 ~ 12m/min
TEMPERATURE RANGE	0 ~ 300°C
MAX LOAD	5kg

ORDER CODE

SMS0880



VERTICAL SEALER
IDEAL FOR SEALING LIQUIDS



HORIZONTAL SEALER
IDEAL FOR SEALING DRY FOODS

HAND PRESS IMPULSE SEALERS

SmartVac



FEATURES

- Body is manufactured from heavy duty painted steel
- Fitted with a timer control and a LED indicator light
- No pre-heating required
- Seals a variety of materials
- Light weight and portable
- Fitted with (4x) non-slip feet

400mm SEALING BAR

SPECIFICATIONS

MODEL	SmartVac PFS-400i
ELECTRICITY	0.6kW, 220V, Single Phase
DIMENSIONS	550 x 85 x 180mm high
WEIGHT	2.8kg
SEALING BAR	400mm
HEATING TIME	0.2 ~ 1.5sec

ORDER CODE

HSM1400




300mm SEALING BAR

SPECIFICATIONS

MODEL	SmartVac PFS-300i
ELECTRICITY	0.4kW, 220V, Single Phase
DIMENSIONS	450 x 85 x 180mm high
WEIGHT	2.5kg
SEALING BAR	300mm
HEATING TIME	0.2 ~ 1.5sec

ORDER CODE

HSM1300



200mm SEALING BAR

SPECIFICATIONS

MODEL	SmartVac PFS-200i
ELECTRICITY	0.3W, 220V, Single Phase
DIMENSIONS	320 x 80 x 150mm high
WEIGHT	1.8kg
SEALING BAR	200mm
HEATING TIME	0.2 ~ 1.5sec

ORDER CODE

HSM1200



WRAPPING MACHINE

SmartVac



FEATURES

- Body is manufactured from stainless steel
- Light weight and portable
- Fitted with (4x) non-slip feet

430mm

SPECIFICATIONS

MODEL	SmartVac HWM-430
ELECTRICITY	0.75kW, 220V, Single Phase
DIMENSIONS	430 x 660 x 155mm high
WEIGHT	5kg
MAX ROLL SIZE	380mm

ORDER CODE

WMS0430



550mm

SPECIFICATIONS

MODEL	SmartVac HWM-550
ELECTRICITY	0.75kW, 220V, Single Phase
DIMENSIONS	550 x 660 x 155mm high
WEIGHT	7kg
MAX ROLL SIZE	500mm

ORDER CODE

WMS0550





SmartChef

PRESSURE FRYERS



SmartChef




SECTION INDEX

Boiling tables (Gas)	29
Brat pans	38-39
Char grillers (Gas)	30
Charcoal ovens	76-77
Chip dumps	46
Combi steam ovens	
• Electricity	60-64, 67
• Gas	65
Cone bakers	53
Contact grills	48
Convection ovens	66, 68-69, 74
Conveyor toasters	50
Cooking ranges	
• Electric (Full)	36-37
• Gas (Full)	28
• Gas (Electric oven)	34-35
Crepe makers	54
Deck ovens	
• Electric	78, 84-86
• Gas	87
Dough proofers	75
Flat top griddles	
• Electric	47
• Gas	31, 47
Fryers	
• Electric (Floor standing)	42
• Electric (Table model)	45
• Gas (Floor standing)	43
• Pressure	44
Induction cookers	41
Microwave ovens	52
Oven grids & pans	70, 88
Ovens	
• Charcoal ovens	76-77
• Convection ovens	66, 68-69, 74
• Combi steam ovens	60-65, 67
• Deck ovens	78, 84-87
• Pastry ovens	66, 68-69, 74
• Pizza ovens	78-82
Proofers	75
Radiant grillers (Gas)	30
Rice cookers	52
Salamanders	51
Sandwich toasters	49
Shawarma machines	40
Tilting pans	38-39
Toasters	
• Contact grills	48
• Conveyor	50
• Manual lift	50
• Sandwich	49
Waffle bakers	
• Belgian	55, 57
• Cone bakers	53
• Lolly (Waffle on a stick)	57
• Round	56, 58
Wok burners	40

FEATURES

- Exterior body manufactured from Stainless steel
- Drip tray provided under burners to catch grease drippings
- Oven pilot with 100% safety shut off
- (1x) chrome oven rack per oven
- 3/4" NPT rear gas connection and regulator provided
- Enamel interior oven for easy cleaning
- Standing pilot for open top burners
- Multiple position oven rack guides
- Available in Natural and LPG models




6 BURNER WITH OVEN

SPECIFICATIONS

MODEL	CookRite ATO-6B
BURNER BTU	(6x) 23 000
OVEN BTU	27 000
TOTAL BTU	165 000
DIMENSIONS	915 x 815 x 910mm high (+ 515mm splashback)
WEIGHT	185kg
GRATE DIM	(6x) 300 x 300mm
OVEN INTERNAL DIM	670 x 660 x 355mm high
OVEN GRID SUPPLIED	(1x) 665 x 642mm
RUNNER SPACING	40mm
TEMPERATURE RANGE	80 ~ 280°C

ORDER CODE CR/ATO-6B



4 BURNER WITH OVEN

SPECIFICATIONS

MODEL	CookRite ATO-4B
BURNER BTU	(4x) 23 000
OVEN BTU	24 000
TOTAL BTU	116 000
DIMENSIONS	610 x 815 x 910mm high (+ 515mm splashback)
WEIGHT	137kg
GRATE DIM	(4x) 300 x 300mm
OVEN INTERNAL DIM	510 x 660 x 355mm high
OVEN GRID SUPPLIED	(1x) 500 x 642mm
RUNNER SPACING	40mm
TEMPERATURE RANGE	80 ~ 280°C

ORDER CODE CR/ATO-4B

ADDITIONAL OVEN GRIDS

DIMENSIONS	665 x 642mm
ORDER CODE	CR/GRID-6B

DIMENSIONS	500 x 642mm
ORDER CODE	CR/GRID-4B

BOILING TABLES

TABLE MODEL

FEATURES

- Robust stainless steel exterior and interior
- Heavy duty burners with a standing pilot for open top burners
- Fitted with (4x) device levelling legs
- Fitted with a stainless steel full width crumb tray
- Heavy duty cast iron top grates



6 BURNER

SPECIFICATIONS

MODEL	CookRite ATHP-36-6
BURNER BTU RATING	(6x) 25 000
TOTAL BTU RATING	150 000
DIMENSIONS	915 x 700 x 390mm high
WEIGHT	65kg
GRATE DIMENSIONS	(6x) 300 x 300mm

ORDER CODE

CR/ATHP-36-3

OPTIONAL STAND

DIMENSIONS
ORDER CODE

915 x 710 x 650mm high
CR/ATSE-2836



4 BURNER

SPECIFICATIONS

MODEL	CookRite ATHP-24-4
BURNER BTU RATING	(4x) 25 000
TOTAL BTU RATING	100 000
DIMENSIONS	610 x 700 x 390mm high
WEIGHT	45kg
GRATE DIMENSIONS	(4x) 300 x 300mm

ORDER CODE

CR/ATHP-24-4

OPTIONAL STAND

DIMENSIONS
ORDER CODE

610 x 710 x 650mm high
CR/ATSE-2824



2 BURNER

SPECIFICATIONS

MODEL	CookRite ATHP-12-2
BURNER BTU RATING	(2x) 25 000
TOTAL BTU RATING	50 000
DIMENSIONS	305 x 700 x 390mm high
WEIGHT	25kg
GRATE DIMENSIONS	(2x) 300 x 300mm

ORDER CODE

CR/ATHP-12-2

RADIANT / CHAR GRILLERS
TABLE MODEL

FEATURES

- Robust stainless steel exterior and interior
- Heavy duty, reversible cast-iron grates
- Top grates are multilevel / adjustable
- Fitted with (4x) device levelling legs



3 BURNER

SPECIFICATIONS

BURNER BTU RATING	(3x) 35 000
TOTAL BTU RATING	105 000
DIMENSIONS	915 x 700 x 390mm high
WEIGHT	85kg
COOKING SURFACE	0.63m ²

CHAR GRILLER


MODEL	CookRite ATCB-36
ORDER CODE	CR/ATCB-36

RADIANT GRILLER

MODEL	CookRite ATRC-36
ORDER CODE	CR/ATRC-36

OPTIONAL STAND

DIMENSIONS	915 x 710 x 650mm high
ORDER CODE	CR/ATSE-2836



2 BURNER

SPECIFICATIONS

BURNER BTU RATING	(2x) 35 000
TOTAL BTU RATING	70 000
DIMENSIONS	610 x 700 x 390mm high
WEIGHT	65kg
COOKING SURFACE	0.41m ²

CHAR GRILLER

MODEL	CookRite ATCB-24
ORDER CODE	CR/ATCB-24

RADIANT GRILLER

MODEL	CookRite ATRC-24
ORDER CODE	CR/ATRC-24


OPTIONAL STAND

DIMENSIONS	610 x 710 x 650mm high
ORDER CODE	CR/ATSE-2824



STONES FOR CHAR GRILLERS

20kg GRILLING STONES	
ORDER CODE	GSB0001

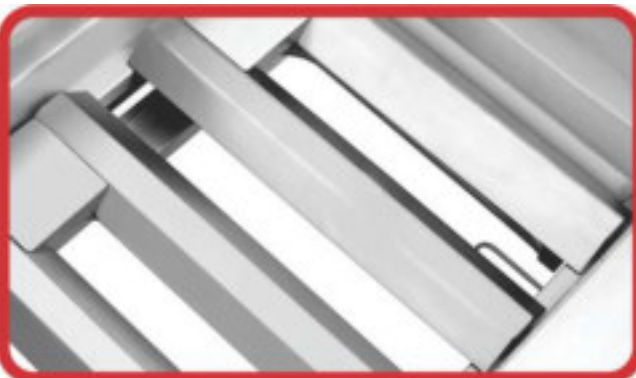

FLAT TOP GRIDDLES TABLE MODEL

CookRite

FEATURES

- Robust stainless steel exterior and interior
- Heavy duty, 12mm thick polished griddle plate
- Supplied with a stainless steel grease drawer
- Fitted with (4x) device levelling legs



3 BURNER

SPECIFICATIONS

MODEL	CookRite ATMG-36
BURNER BTU RATING	(3x) 30 000
TOTAL BTU RATING	90 000
DIMENSIONS	915 x 700 x 390mm high
WEIGHT	105kg
COOKING SURFACE	0.63m ²

ORDER CODE

CR/ATMG-36

OPTIONAL STAND

DIMENSIONS	915 x 710 x 650mm high
ORDER CODE	CR/ATSE-2836



2 BURNER

SPECIFICATIONS

MODEL	CookRite ATMG-24
BURNER BTU RATING	(2x) 30 000
TOTAL BTU RATING	60 000
DIMENSIONS	610 x 700 x 390mm high
WEIGHT	73kg
COOKING SURFACE	0.41m ²

ORDER CODE

CR/ATMG-24

OPTIONAL STAND

DIMENSIONS	610 x 710 x 650mm high
ORDER CODE	CR/ATSE-2824



FEATURES

- Ships flat-packed
- Tools are included for easy assembly
- Sturdy, stainless steel top surface and under shelf
- Safety hemmed edge around the sides and back comes standard to keep equipment and other content from sliding off
- Added "H-shape" reinforced rib underneath the top surface makes it able to support more evenly distributed weight
- Adjustable under shelf and bullet feet provide additional storage space, as well as optimum stability



1220mm

SPECIFICATIONS

MODEL CookRite ATSE-2848
DIMENSIONS 1220 x 710 x 650mm high
WEIGHT 29kg

ORDER CODE CR/ATSE-2848



915mm

SPECIFICATIONS

MODEL CookRite ATSE-2836
DIMENSIONS 915 x 710 x 650mm high
WEIGHT 24kg

ORDER CODE CR/ATSE-2836



610mm

SPECIFICATIONS

MODEL CookRite ATSE-2824
DIMENSIONS 610 x 710 x 650mm high
WEIGHT 18kg

ORDER CODE CR/ATSE-2824



EASY TO ASSEMBLE



ADJUSTABLE FEET



DURABLE STAINLESS STEEL

CookRite



Create the ultimate chef's work station
by combining CookRite cooking tops
with CookRite chef bases.



* FULL SPECS ON PAGE 139

GAS COOKING RANGES WITH ELECTRIC CONVECTION OVEN



FEATURES

- Powder-coated steel housing
- (3x) Large burners, (1x) small burner, (1x) wok burner
- Fitted with an electric igniter
- Cast iron grid over the burners
- Electric convection oven can accommodate up to (4x) GN 1/1 inserts
- The oven is fitted with (2x) fans without reverse function
- Thermostat 100°C to 275°C
- Additional upper 2.5 kW heating element for grilling
- Fitted with a timer for easier organisation of kitchen work
- Illuminated stainless-steel chamber
- Removable stainless-steel grid for GN trays
- Double-glazed door with free cooling to improve working safety
- Fitted with height-adjustable feet
- Available in 3 Phase and Single Phase units



5 BURNER - 3 PHASE

SPECIFICATIONS

MODEL	TECNOEKA EKC96.3
BTU RATING	48 800
ELECTRICITY	5.2kW, 380V, 3 Phase + N
DIMENSIONS	900 x 600 x 900mm high
WEIGHT	74kg
INTERNAL OVEN DIM	665 x 410 x 350mm high
RUNNER SPACING	70mm
OVEN TEMP RANGE	100 ~ 275°C

ORDER CODE EKC96.3

5 BURNER - SINGLE PHASE

SPECIFICATIONS

MODEL	TECNOEKA EKC96
BTU RATING	48 800
ELECTRICITY	2.6kW, 240V, Single Phase
DIMENSIONS	900 x 600 x 900mm high
WEIGHT	74kg
INTERNAL OVEN DIM	665 x 410 x 350mm high
RUNNER SPACING	70mm
OVEN TEMP RANGE	100 ~ 275°C

ORDER CODE EKC96

OPTIONAL EXTRAS

OVEN GRIDS
530 x 325mm

OGS0011

FULL INSERT
GN 1/1 - 55mm deep

GNF8055



GAS COOKING RANGES WITH ELECTRIC CONVECTION OVEN

arisco

6 BURNER

WITH ELECTRIC CONVECTION OVEN & CABINET

FEATURES

- Body and panelling manufactured of stainless steel
- Top grids manufactures from cast iron
- Each burner provides heat economy, operating independently from each other
- Fitted with a 1/1 GN electric convection oven and stainless steel neutral cabinet
- Oven controlled by thermostat against overheating
- Fitted with (4x) devise leveling legs
- Supplied with (1x) 1/1 GN oven grid



SPECIFICATIONS

MODEL	Arisco GR732E/EO722/D711
BTU RATING	36 000
ELECTRICITY	3kW, 380V, 3 Phase + N
DIMENSIONS	1200 x 700 x 920mm high
WEIGHT	110kg
INTERNAL OVEN DIM	610 x 405 x 302mm high
RUNNER SPACING	48mm - 4 levels
INTERNAL CABINET DIM	355 x 537 x 425mm high
OVEN TEMP RANGE	50 ~ 320°C

ORDER CODE **ARI/6BG-EOC/700**

4 BURNER

WITH ELECTRIC CONVECTION OVEN

FEATURES

- Body and panelling manufactured of stainless steel
- Top grids manufactures from cast iron
- Each burner provides heat economy, operating independently from each other
- Fitted with a 1/1 GN electric convection oven
- Oven controlled by thermostat against overheating
- Fitted with (4x) devise leveling legs
- Supplied with (1x) 1/1 GN oven grid



SPECIFICATIONS

MODEL	Arisco GR721S/EO722
BTU RATING	24 000
ELECTRICITY	3kW, 380V, 3 Phase + N
DIMENSIONS	800 x 700 x 920mm high
WEIGHT	97kg
INTERNAL OVEN DIM	610 x 405 x 302mm high
RUNNER SPACING	48mm - 4 levels
OVEN TEMP RANGE	50 ~ 320°C

ORDER CODE **ARI/4BG-EOC/700**

OPTIONAL OVEN GRIDS

DIMENSIONS	530 x 325mm
ORDER CODE	OGS0011



ELECTRIC COOKING RANGES 700 SERIES

arisco®

4 PLATE WITH 1/1 GN CONVECTION OVEN

FEATURES

- Body and panelling manufactured of stainless steel
- Fitted with (4x) 220mm round plates
- Each plate provides heat economy, operating independently from each other
- Fitted with a 1/1 GN electric convection oven
- Controlled by thermostats against overheating
- Fitted with (4x) devise leveling legs
- Supplied with (1x) 1/1 GN oven grid



SPECIFICATIONS

MODEL	Arisco ER722
ELECTRICITY	13.4kW, 380V, 3 Phase + N
DIMENSIONS	800 x 700 x 900mm high
WEIGHT	88kg
INTERNAL OVEN DIM	610 x 405 x 302mm high
RUNNER SPACING	48mm - 4 levels
OVEN TEMP RANGE	50 ~ 320°C

ORDER CODE

ARI/ER722

4 PLATE WITH NEUTRAL CABINET

FEATURES

- Body and panelling manufactured of stainless steel
- Fitted with (4x) 220mm round plates
- Each plate provides heat economy, operating independently from each other
- Controlled by thermostats against overheating
- Fitted with a stainless steel neutral cabinet
- Fitted with (4x) devise leveling legs



SPECIFICATIONS

MODEL	Arisco ER721-S/D721
ELECTRICITY	10.4kW, 380V, 3 Phase + N
DIMENSIONS	800 x 700 x 900mm high
WEIGHT	53kg
INTERNAL CABINET DIM	710 x 537 x 425mm high

ORDER CODE

ARI/ER721S/D721

OPTIONAL OVEN GRIDS

DIMENSIONS	530 x 325mm
ORDER CODE	OGS0011



ELECTRIC COOKING RANGES 900 SERIES

arisco

4 PLATE WITH 2/1 GN CONVECTION OVEN

FEATURES

- Body and panelling manufactured of stainless steel
- Fitted with (4x) 300 x 300mm square plates
- Each plate provides heat economy, operating independently from each other
- Fitted with a 2/1 GN electric convection oven
- Controlled by thermostats against overheating
- Fitted with (4x) devise leveling legs
- Supplied with (1x) 2/1 GN oven grid



SPECIFICATIONS

MODEL	Arisco ER922
ELECTRICITY	22kW, 380V, 3 Phase + N
DIMENSIONS	850 x 900 x 900mm high
WEIGHT	149kg
INTERNAL OVEN DIM	610 x 615 x 302mm high
RUNNER SPACING	48mm - 4 levels
OVEN TEMP RANGE	50 ~ 300°C

ORDER CODE ARI/ER922

4 PLATE WITH NEUTRAL CABINET

FEATURES

- Body and panelling manufactured of stainless steel
- Fitted with (4x) 300 x 300mm square plates
- Each plate provides heat economy, operating independently from each other
- Controlled by thermostats against overheating
- Fitted on a stainless steel neutral cabinet
- Fitted with (4x) devise leveling legs




SPECIFICATIONS

MODEL	Arisco ER921
ELECTRICITY	16kW, 380V, 3 Phase + N
DIMENSIONS	850 x 900 x 900mm high
WEIGHT	108kg
INTERNAL CABINET DIM	825 x 790 x 425mm high

ORDER CODE ARI/ER921

OPTIONAL OVEN GRIDS

DIMENSIONS	650 x 530mm
ORDER CODE	OGS0021

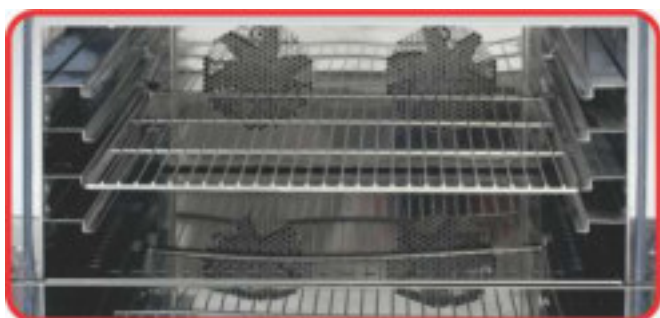

TILTING / BRAT PANS ELECTRIC & GAS

arisco

FEATURES

- 304 stainless steel tank for easy cleaning
- Safety cutout switch - when tank is lifted burners/elements shut off
- Precise thermostatic temperature control
- Gas models are fitted with stainless steel burners and pilot light
- Fitted with (4x) devise leveling legs
- 10mm, 316L stainless steel base plate
- Easy to use analogue controls
- Fitted with water fill tap
- Manual tank lift mechanism
- Fitted with counterbalanced hinged lid



95 LITRE *ELECTRIC*

SPECIFICATIONS

MODEL	Aristo EP922
ELECTRICITY	12kW, 380V, 3 Phase + N
DIMENSIONS	1000 x 900 x 900mm high
WEIGHT	163kg
CAPACITY	95L†
COOKING SURFACE	915 x 605mm - 0.55m ²
TEMPERATURE RANGE	50 ~ 300°C

ORDER CODE

ARI/EP922

95 LITRE *GAS*

SPECIFICATIONS

MODEL	Aristo GP922
BTU RATING	71 655
DIMENSIONS	1000 x 900 x 900mm high
WEIGHT	163kg
CAPACITY	95L†
COOKING SURFACE	915 x 605mm - 0.55m ²
TEMPERATURE RANGE	100 ~ 300°C

ORDER CODE

ARI/GP922



TILTING / BRAT PANS ELECTRIC

Kromet



FEATURES

- Robust stainless steel construction
- Pan tilt with manual tilting mechanism/wheel
- Manual lift lid
- Lid designed to prevent dripping
- Extremely durable and reliable product
- Fitted with (4x) device levelling plastic foot pieces

40 LITRE *ELECTRIC*

SPECIFICATIONS

MODEL	Kromet 000.PE-025P
ELECTRICITY	5.4kW, 380V, 3 Phase + N
DIMENSIONS	700 x 600 x 850mm high
WEIGHT	72kg
CAPACITY	40Lt
COOKING SURFACE	0.25m ²
TEMPERATURE RANGE	50 ~ 250°C

ORDER CODE

TPK0040



DOUBLE BURNER WOK UNIT GAS



FEATURES

- 1,5 mm thick work top is made of AISI 304 stainless steel
- High performance burners are made of cast iron
- Built-in Spice rack - (8x) GN 1/6 inserts can be used
- Supplied without inserts
- Heavy-duty upper cast iron rings are suitable for wok pots
- Fitted with water filling taps with push-pull system

SPECIFICATIONS

MODEL	Crystal UMOP0101
BTU RATING	123 000
DIMENSIONS	1500 x 900 x 850mm high
WEIGHT	81kg
TEMPERATURE RANGE	80 ~ 280°C

ORDER CODE

CRY-UMOP0101



OPTIONAL INSERTS

GN 1/6 - 100mm deep

GNS8100

GN 1/6 - 65mm deep

GNS8065

GN 1/6 - Lid

GNS8000

SHAWARMA MACHINES GAS



FEATURES

- Machine body manufactured from stainless steel
- Fitted with a magnet safety valve
- Adjustable spear
- Sliding bottom housing of the spear allows shawarma meat to get closer to the burner
- Dual direction motor
- Hygienic and safe
- LPG or natural gas



4 BURNER SPECIFICATIONS

MODEL	Empero EMP.DN.151
ELECTRICITY	220V, Single Phase
BTU RATING	47 770
DIMENSIONS	750 x 620 x 1050mm high
WEIGHT	46kg
NUMBER OF BURNERS	4

ORDER CODE

EMP.DN.151

INDUCTION COOKERS TABLE MODEL

SmartChef-i

FEATURES

- Stainless steel body
- Touch control
- Timer (0 - 180min) on single plate only
- 10 temperature settings
- Black crystal glass hob
- LED display
- 10 power levels (500 - 3500W)
- Electronic overheating protection



SINGLE

SPECIFICATIONS

MODEL	SmartChef-i BT-350K6-E
ELECTRICITY	3.5kW, 230V, Single Phase
DIMENSIONS	330 x 425 x 105mm high
WEIGHT	5kg
TEMPERATURE RANGE	60 ~ 240°C

ORDER CODE

ISC-BT-350K6-E



DOUBLE

SPECIFICATIONS

MODEL	SmartChef-i BT-700D3(T)
ELECTRICITY	(2x) 3.5kW, 230V, Single Phase
DIMENSIONS	390 x 710 x 125mm high
WEIGHT	14kg
TEMPERATURE RANGE	60 ~ 240°C

ORDER CODE

ISC-BT-700D3(T)



WOK COOKER

SPECIFICATIONS

MODEL	SmartChef-i BT-350KCT-2-A
ELECTRICITY	3.5kW, 230V, Single Phase
DIMENSIONS	425 x 330 x 135mm high
WEIGHT	6kg
TEMPERATURE RANGE	60 ~ 240°C

ORDER CODE

ISC-BT-350KCT2A



WOK PAN

SPECIFICATIONS

MODEL	SmartChef-i SSWOK
DIAMETER	360mm
WEIGHT	3kg

ORDER CODE

ISC-SSWOK

ELECTRIC FRYERS FLOOR STANDING



FEATURES

- High quality stainless steel body
- High power for fast heating and recovery
- Replaceable individual heating elements
- Supplied with night covers
- Fitted with control and safety thermostat
- Even heat distribution
- Supplied with chrome plated wire baskets with insulated plastic hand grips
- Fitted with (4x) 150mm, height adjustable, device leveling legs



2 x 30L BINS

SPECIFICATIONS

MODEL	SmartChef E-DZ-800G
ELECTRICITY	36kW, 380V, 3 Phase + N
DIMENSIONS	800 x 825 x 900mm high (+260 mm splashback)
WEIGHT	260kg
TEMPERATURE RANGE	50 ~ 190°C
CAPACITY	2 x 30L
BASKETS INCLUDED	(4x) 160 x 335 x 150mm deep
BASKET CAPACITY	7.5L

ORDER CODE

KB/E-DZ-800G

4 x 15L BINS

SPECIFICATIONS

MODEL	SmartChef E-DZ-800G-2
ELECTRICITY	36kW, 380V, 3 Phase + N
DIMENSIONS	800 x 825 x 900mm high (+260 mm splashback)
WEIGHT	260kg
TEMPERATURE RANGE	50 ~ 190°C
CAPACITY	4 x 15L
BASKETS INCLUDED	(4x) 160 x 335 x 150mm deep
BASKET CAPACITY	7.5L

ORDER CODE

KB/E-DZ-800G-2



1 x 30L BIN

SPECIFICATIONS

MODEL	SmartChef E-DZ-400G
ELECTRICITY	18kW, 380V, 3 Phase + N
DIMENSIONS	400 x 825 x 900mm high (+260 mm splashback)
WEIGHT	195kg
TEMPERATURE RANGE	50 ~ 190°C
CAPACITY	30L
BASKETS INCLUDED	(2x) 160 x 335 x 150mm deep
BASKET CAPACITY	7.5L

ORDER CODE

KB/E-DZ-400G

2 x 15L BINS

SPECIFICATIONS

MODEL	SmartChef E-DZ-400G-2
ELECTRICITY	18kW, 380V, 3 Phase + N
DIMENSIONS	400 x 825 x 900mm high (+260 mm splashback)
WEIGHT	195kg
TEMPERATURE RANGE	50 ~ 190°C
CAPACITY	2 x 15L
BASKETS INCLUDED	(2x) 160 x 335 x 150mm deep
BASKET CAPACITY	7.5L

ORDER CODE

KB/E-DZ-400G-2

OPTIONAL EXTRAS

FRYER BASKET
ORDER CODE

FBS0075

OIL RECEIVING BIN

ORDER CODE ORB0001

OIL FILTER STAND

ORDER CODE OFS0001

OIL FILTER BAGS

ORDER CODE OFB0001

GAS FRYERS FLOOR STANDING

CookRite



FEATURES

- Stainless steel exterior and interior
- Welded stainless steel tank
- Heavy duty burners with a standing flame and standby pilots
- High quality thermostat maintains select temperature automatically between 93°C - 200°C
- Oil cooling zone in the bottom of the tank captures food particles and extends oil life
- Safety valve with an automatic gas stabilizing function
- Self-reset high temperature limiting device
- Supplied with 2 nickel plated baskets with coated handles
- Supplied with wire mesh crumb screen and basket hanger
- Fitted with (4x) 150mm, height adjustable, device leveling legs

35L^t BIN

SPECIFICATIONS

MODEL	CookRite ATFS-75
BTU RATING	150 000
DIMENSIONS	536 x 765 x 920mm high (+210 mm splashback)
WEIGHT	76kg
TEMPERATURE RANGE	93 ~ 200°C
CAPACITY	35L ^t
BASKETS INCLUDED	(2x) 235 x 335 x 150mm deep
BASKET CAPACITY	12L ^t

ORDER CODE

CR/ATFS-75

ADDITIONAL BASKETS

DIMENSIONS	235 x 335 x 150mm deep
ORDER CODE	FBS0012



20L^t BIN

SPECIFICATIONS

MODEL	CookRite ATFS-40
BTU RATING	90 000
DIMENSIONS	400 x 765 x 920mm high (+210 mm splashback)
WEIGHT	60kg
TEMPERATURE RANGE	93 ~ 200°C
CAPACITY	20L ^t
BASKETS INCLUDED	(2x) 160 x 335 x 150mm deep
BASKET CAPACITY	7.5L ^t

ORDER CODE

CR/ATFS-40

ADDITIONAL BASKETS

DIMENSIONS	160 x 335 x 150mm deep
ORDER CODE	FBS0075

OPTIONAL EXTRAS

OIL RECEIVING BIN
ORDER CODE

ORB0001

OIL FILTER STAND
ORDER CODE

OFS0001

OIL FILTER BAGS
ORDER CODE

OFB0001



FEATURES

- Body manufactured from 304 Stainless steel
- Built-in filtration system makes oil recycling easy and energy efficient
- Fitted with a pressure gauge
- Functions: electronic timing / automatic temperature and pressure control / exhausting and over-pressure protection
- Electronic control panel with 10 pre-programmed cooking functions
- Supplied with (1x) fryer baskets (Regular)
- Fitted with (4x) castors (2 lockable)

25 LITRE - FLOOR STANDING

SPECIFICATIONS

MODEL	SmartChef YXD-25D
ELECTRICITY	13.5kW, 380V, 3 Phase + N
DIMENSIONS	470 x 920 x 1180mm high
WEIGHT	135kg
TEMPERATURE RANGE	60 ~ 200°C
OPERATING PRESSURE	12psi
CAPACITY	25Lt
BASKETS INCLUDED	(1x) 250 x 340 x 195mm deep
BASKET CAPACITY	16.5Lt

ORDER CODE

PFS-YXD-25D



OPTIONAL EXTRAS

250 x 340 x 195mm
3 LAYER BASKET
FILTER PAPER 20 PACK

XPFS1000
XPFS3000
XPFS/0001



FEATURES

- Body manufactured from 304 Stainless steel
- Aluminum lid, rugged and lightweight, easy to open and close
- Manual temperature control and timer
- Quadruple explosion protection: Vent valve; pressure valve; silicone sealing ring; elastic beam
- Fitted with a pressure gauge
- Fitted with an oil drainage tap with a safety locking mechanism
- Supplied with fryer basket
- Fitted with non-slip feet

16 LITRE - TABLE MODEL

SPECIFICATIONS

MODEL	SmartChef YXDT-16
ELECTRICITY	3kW, 230V, Single Phase
DIMENSIONS	440 x 570 x 520mm high
WEIGHT	21kg
TEMPERATURE RANGE	60 ~ 200°C
OPERATING PRESSURE	8psi
CAPACITY	16Lt
BASKETS INCLUDED	(1x) 738 Ø x 195mm deep
BASKET CAPACITY	8.5Lt

ORDER CODE

PFS-YXDT-16



ADDITIONAL BASKETS


738 Ø x 195mm

XPFS0000



ELECTRIC FRYERS TABLE MODEL

SmartChef



FEATURES

- Removable element box
- 3kW element per pan for fast recovery
- Supplied with night cover and baskets
- Removable oil tank with special handles
- Fitted with safety thermostat
- Fitted with (4x) non-slip rubber feet


2 x 6Lt BINS

SPECIFICATIONS

MODEL	SmartChef WF102
ELECTRICITY	(2x) 3kW, 230V, Single Phase
DIMENSIONS	590 x 440 x 285mm high
WEIGHT	9kg
TEMPERATURE RANGE	60°C ~ 200°C
CAPACITY	(2x) 6Lt
BASKETS INCLUDED	(2x) 200 x 215 x 100mm deep
BASKET CAPACITY	(2x) 4.3Lt

ORDER CODE

FTS2006



1 x 6Lt BIN

SPECIFICATIONS

MODEL	SmartChef WF101
ELECTRICITY	3kW, 230V, Single Phase
DIMENSIONS	290 x 440 x 285mm high
WEIGHT	4kg
TEMPERATURE RANGE	60°C ~ 200°C
CAPACITY	6Lt
BASKETS INCLUDED	(1x) 200 x 215 x 100mm deep
BASKET CAPACITY	4.3Lt

ORDER CODE

FTS1006

ADDITIONAL BASKET

DIMENSIONS	200 x 215 x 100mm deep
CAPACITY	4.3Lt

ORDER CODE

FBS0043



CHIP DUMPS TABLE MODEL

SmartChef



FEATURES

- Manufactured from stainless steel
- Heating element provides even heat distribution
- Ideal for keeping chips warm
- Fitted with (4x) non-slip rubber feet

SPECIFICATIONS

MODEL	SmartChef HCW-620
ELECTRICITY	1kW, 230V, Single Phase
DIMENSIONS	345 x 605 x 550mm high
WEIGHT	7kg
TEMPERATURE RANGE	30 ~ 85°C

ORDER CODE

CDS1000



CHIP DUMP / PACKING STATION

SmartChef



FEATURES

- Manufactured from heavy-duty stainless steel
- Fitted with a removable drainboard and oil collecting pan to drain and collect excess oil
- Fitted with a multi-slot packaging shelf
- Infrared heating tubes provide heat to keep your fried foods hot, crisp, and ready to serve at all times
- Two warm light bulbs attached to the top illuminates the food station for improved display
- Separate switches provide simplified operation for controlling the heat and lights individually
- Fitted with 4 non-slip feet

SPECIFICATIONS

MODEL	SmartChef HCW-8
ELECTRICITY	0.64kW, 220V, Single Phase
DIMENSIONS	800 x 700 x 650mm high
WEIGHT	31kg
TEMPERATURE RANGE	30°C ~ 85°C

ORDER CODE

CDS2000



CHIP DUMP OPTIONAL EXTRAS

STAINLESS STEEL CHIP BAGGING SCOOP

DIMENSIONS	190 x 200mm
ORDER CODE	CBS0001



FLAT TOP GRIDDLES TABLE MODEL

SmartChef



ELECTRIC - 730mm

SPECIFICATIONS

MODEL	SmartChef HEG-820
ELECTRICITY	4.4kW, 230V, Single Phase
DIMENSIONS	730 x 470 x 240mm high
WEIGHT	34kg
COOKING SURFACE	728 x 400mm
TEMPERATURE RANGE	50°C ~ 300°C

ORDER CODE

FTS0730



FEATURES

- Strong stainless steel body with splash guard
- Large output capacity
- Thick steel plate for even heat distribution and heat retention
- Fat drainage drawer for convenience
- Thermostat controller
- Energy efficient
- Easy to use and clean-up
- Fitted with (4x) non-slip feet

ELECTRIC - 550mm

SPECIFICATIONS

MODEL	SmartChef HEG-818
ELECTRICITY	3kW, 230V, Single Phase
DIMENSIONS	550 x 430 x 240mm high
WEIGHT	19kg
COOKING SURFACE	548 x 350mm
TEMPERATURE RANGE	50°C ~ 300°C

ORDER CODE

FTS0550



FLAT TOP GRIDDLES

omake
All Kitchen Equipments

FEATURES

- Electric and gas models available
- 6mm thick steel cooking surface
- 360°C Limit thermostat
- Easy to clean
- Body manufactured from 430 stainless steel
- Removable oil collection chamber
- Manual temperature control
- Modern ergonomic design



ELECTRIC - 600mm

SPECIFICATIONS

MODEL	OMAKE IZG01-E11
ELECTRICITY	5.25kW, 220V, Single Phase
DIMENSIONS	600 x 480 x 270mm high
WEIGHT	30kg
COOKING SURFACE	400 x 585mm
TEMPERATURE RANGE	50 ~ 300°C

ORDER CODE

OMK-IZG01-E11



GAS - 600mm

SPECIFICATIONS

MODEL	OMAKE IZG01-G11
BTU RATING	17 600 BTU/hr
DIMENSIONS	600 x 480 x 270mm high
WEIGHT	26kg
COOKING SURFACE	400 x 585mm
TEMPERATURE RANGE	50 ~ 300°C

ORDER CODE

OMK-IZG01-G11



FEATURES

- Adjustable top plate for a variety of product thickness
- Heat resistant handle
- Available in full flat and full ribbed non-stick surface models
- Drip tray to catch excess fat
- Robust construction
- Fitted with (4x) non-slip feet



NON-STICK FLAT PLATES

SPECIFICATIONS

MODEL	SmartChef HEG-811EB
ELECTRICITY	2.2kW, 230V, Single Phase
DIMENSIONS	435 x 410 x 210mm high
WEIGHT	19kg
COOKING SURFACE	345 x 235mm
TEMPERATURE RANGE	50°C ~ 300°C

ORDER CODE CGS0002



NON-STICK RIBBED PLATES

SPECIFICATIONS

MODEL	SmartChef HEG-811E
ELECTRICITY	2.2kW, 230V, Single Phase
DIMENSIONS	435 x 410 x 210mm high
WEIGHT	19kg
COOKING SURFACE	345 x 235mm
TEMPERATURE RANGE	50°C ~ 300°C

ORDER CODE CGS1002



FEATURES

- Robust construction
- Drip tray to catch excess fat
- Fitted with a heat resistant handle
- Adjustable top plate for a variety of product thickness
- Available in standard & non-stick plate models
- Fitted with (4x) non-slip feet



STANDARD PLATES

SPECIFICATIONS

MODEL	SmartChef HT-01
ELECTRICITY	2.2kW, 230V, Single Phase
DIMENSIONS	540 x 400 x 290mm high
WEIGHT	8kg
COOKING SURFACE	353 x 330mm
TEMPERATURE RANGE	50°C ~ 300°C

ORDER CODE STS0009



NON-STICK PLATES

SPECIFICATIONS

MODEL	SmartChef HT-01
ELECTRICITY	2.2kW, 230V, Single Phase
DIMENSIONS	540 x 400 x 290mm high
WEIGHT	8kg
COOKING SURFACE	353 x 330mm
TEMPERATURE RANGE	50°C ~ 300°C

ORDER CODE STS1009

OPTIONAL EXTRAS

Teflon cover TCT0001



CONVEYOR TOASTERS

SmartChef



FEATURES

- Stainless steel construction
- Various conveyor speed settings
- Standby / bread / roll settings available
- Perfect for self-service application
- Can be set to pass through or return to front operation
- Individual heat controls for top and bottom elements
- Fitted with (4x) device leveling legs

450 SLICE WIDE BELT

SPECIFICATIONS

MODEL	SmartChef TT-450
ELECTRICITY	2.6kW, 230V, Single Phase
DIMENSIONS	470 x 420 x 400mm high
WEIGHT	18kg
CAPACITY	450 ~ 500 slices per hour

ORDER CODE

CTS0450



300 SLICE

SPECIFICATIONS

MODEL	SmartChef TT-300
ELECTRICITY	1.94kW, 230V, Single Phase
DIMENSIONS	350 x 420 x 400mm high
WEIGHT	14kg
CAPACITY	300 ~ 350 slices per hour

ORDER CODE

CTS0300

6 SLICE TOASTERS



FEATURES

- Stainless steel construction
- Fitted with a timer
- 3 or 6 slot operation can be chosen
- Fitted with (4x) non-slip feet

SPECIFICATIONS

MODEL	SmartChef HET-6
ELECTRICITY	3.2kW, 230V, Single Phase
DIMENSIONS	460 x 210 x 225mm high
WEIGHT	7kg
CAPACITY	3/6 slices

ORDER CODE

TLS0006

SALAMANDERS GAS

CookRite



FEATURES

- High quality stainless steel structure
- Corrosion resistant and easy to clean
- Thick steel plate for even heat distribution and heat retention
- 4 Position adjustable shelf
- Fat drainage drawer for convenience
- Thermostat controller
- (2x) 21,500 BTU high efficiency ceramic infrared burners and standby pilots
- Energy efficient
- Easy to use and clean
- Fitted with (4x) non-slip feet



SPECIFICATIONS

MODEL	CookRite ATSB-36
TOTAL BTU RATING	43 000
DIMENSIONS	914 x 457 x 440mm high
WEIGHT	65kg
RUNNER SPACING	95mm
SHELF DIMENSIONS	710 x 356mm

ORDER CODE

CR/ATSB-36

SALAMANDERS ELECTRIC



SPECIFICATIONS

ELECTRICITY	4.4kW, 380V, 3 Phase + N
DIMENSIONS	880 x 370 x 380mm high
WEIGHT	28kg
TEMPERATURE RANGE	30°C ~ 90°C
RUNNER SPACING	70mm

LEVER LIFT GRID

MODEL	RM Gastro SE70M
SHELF DIMENSIONS	645 x 300mm

ORDER CODE

RMG/SE70M

REMOVABLE GRID

MODEL	RM Gastro SE70
SHELF DIMENSIONS	710 x 300mm

ORDER CODE

RMG/SE70

FEATURES

- Inner and outer casing manufactured from stainless steel
- Rear panel can be removed to have pass through hatch
- Fitted with 2 sets of individually controlled incolloy elements
- Model SE70M has 4 pre-set positions for adjustable grid
- Model SE70 has 3 pre-set positions for removable grid
- Fitted with (4x) non-slip plastic feet

OPTIONAL WALL MOUNTING PLATE

ORDER CODE

RMG/DSE-47

ELECTRIC RICE COOKER

SmartChef



FEATURES

- Painted steel exterior pot fitted with cool-touch plastic handles
- Removable interior cooking pot manufactured from high quality aluminium
- Stainless steel lid with cool-touch plastic handle
- Keep-warm function keeps food fresh before serving
- Cooking and keep-warm indicator lights
- Fitted with (3x) plastic feet
- Supplied with a food grade plastic rice spoon

SPECIFICATIONS

MODEL	SmartChef ERC-10L
ELECTRICITY	1.6kW, 220V, Single Phase
DIMENSIONS	710 Ø x 325mm high
WEIGHT	5kg
CAPACITY	10Lt

ORDER CODE

RCS0010



MICROWAVE OVEN



FEATURES

- All stainless steel exterior and interior
- Audible alarm when timed cycle is complete
- Includes interior light
- Large easy to grip polished handle with durable interlock system
- Reinforced flexible door latch to reduce breakage
- Digital touch pad controls
- LED display
- 3 stage cooking capabilities
- Fitted with (4x) non-slip rubber feet

SPECIFICATIONS

MODEL	General Wave GEW1050E
ELECTRICITY	1kW, 220V, Single Phase
DIMENSIONS	508 x 356 x 305mm high
WEIGHT	16kg
CAPACITY	28Lt

ORDER CODE

MWG1001



OPTIONAL MICROWAVE WALL BRACKET

DIMENSIONS	600 x 400mm
ORDER CODE	WBM0001

FEATURES

- Machine body manufactured from stainless steel
- Fitted with a timer
- Easy to clean
- Fitted with (4x) non-slip feet
- Baking plates manufactured from Teflon coated cast iron
- Thermostat controlled
- Spiral metal handles. Isolated to prevent burning
- Cone roller moulds included



DOUBLE PLATE

SPECIFICATIONS

MODEL SmartChef HCB-2
 ELECTRICITY 2.4kW, 230V, Single Phase
 DIMENSIONS 500 x 360 x 270mm high
 WEIGHT 11kg
 BAKING SURFACE (2x) 210mm Ø
 TEMPERATURE RANGE 50 ~ 300°C

ORDER CODE

CBS1002



SINGLE PLATE

SPECIFICATIONS

MODEL SmartChef HCB-1
 ELECTRICITY 1.2kW, 230V, Single Phase
 DIMENSIONS 250 x 360 x 270mm high
 WEIGHT 6.4kg
 BAKING SURFACE 210mm Ø
 TEMPERATURE RANGE 50 ~ 300°C

ORDER CODE

CBS1001



CREPE MAKERS



omake
All Kitchen Equipments



FEATURES

- Body manufactured from 430 stainless steel
- Teflon coated cast-iron cooking surface
- Stainless steel heating element
- Digital temperature control and timer for precise temperature and cooking time
- Easy to clean

SPECIFICATIONS

MODEL	OMAKE KRP01-E15
ELECTRICITY	3kW, 220V, Single Phase
DIMENSIONS	500 x 460 x 270mm high
WEIGHT	19kg
BAKING SURFACE	400mm Ø
TEMPERATURE RANGE	90 ~ 250°C

ORDER CODE

OMK-KRP01-E15



DIGITAL TEMP. CONTROL & TIMER



SQUARE BELGIAN WAFFLE BAKERS HEAVY DUTY



FEATURES

- Teflon coated aluminium injection body
- Teflon coated aluminium injection mould (Belgian as standard)
- Stainless steel heating elements
- Modern ergonomic design
- Available in single and double models
- 430 Stainless steel base
- Additional easy interchangeable mould shapes available
- Easy to clean
- Fitted with (4x) non-slip feet
- Manual and digital control models available



DOUBLE SPECIFICATIONS

ELECTRICITY	5kW, 230V, Single Phase
DIMENSIONS	560 x 450 x 270mm high
WEIGHT	24kg
BAKING SURFACE	(2x) 220 x 220mm
TEMPERATURE RANGE	50 ~ 250°C

DIGITAL CONTROL

MODEL	OMAKE WFL21-E25-2101
ORDER CODE	OMK-WFL21-E25

MANUAL CONTROL

MODEL	OMAKE WFL21-E21-2101
ORDER CODE	OMK-WFL21-E21



SINGLE SPECIFICATIONS

ELECTRICITY	2.5kW, 230V, Single Phase
DIMENSIONS	270 x 450 x 270mm high
WEIGHT	13kg
BAKING SURFACE	220 x 220mm
TEMPERATURE RANGE	50 ~ 250°C

DIGITAL CONTROL

MODEL	OMAKE WFL21-E15-2101
ORDER CODE	OMK-WFL21-E15

MANUAL CONTROL

MODEL	OMAKE WFL21-E11-2101
ORDER CODE	OMK-WFL21-E11

ADDITIONAL INTERCHANGEABLE MOLDS



CLASSIC

ORDER CODE
OMK-WFL21-2102



MINI SQUARE

ORDER CODE
OMK-WFL21-2103



HEART SHAPE

ORDER CODE
OMK-WFL21-2107



WAFFLE LOLLY

ORDER CODE
OMK-WFL21-2111



CONE PLATE

ORDER CODE
OMK-WFL21-2109

ROUND BELGIAN WAFFLE BAKERS ROTATING



FEATURES

- Teflon coated aluminium injection body
- Teflon coated aluminium injection mould (Belgian round as standard)
- Stainless steel heating elements
- Digital temperature control and timer ensures constant baking results
- Available in single and double models
- 430 Stainless steel base
- Baking mechanism rotates 180°
- Modern ergonomic design
- Easy to clean
- Fitted with (4x) non-slip feet



DOUBLE - DIGITAL CONTROL 180°

SPECIFICATIONS

MODEL	OMAKE WFL02-E25-0101
ELECTRICITY	5kW, 230V, Single Phase
DIMENSIONS	560 x 450 x 270mm high
WEIGHT	24kg
BAKING SURFACE	(2x) 180mm Ø
TEMPERATURE RANGE	50 ~ 300°C

ORDER CODE OMK-WFL02-E25



SINGLE - DIGITAL CONTROL 180°

SPECIFICATIONS

MODEL	OMAKE WFL02-E15-0101
ELECTRICITY	2.5kW, 230V, Single Phase
DIMENSIONS	270 x 450 x 270mm high
WEIGHT	13kg
BAKING SURFACE	180mm Ø
TEMPERATURE RANGE	50 ~ 300°C

ORDER CODE OMK-WFL02-E15



HEAD ROTATES 180° FOR OPTIMUM BAKING



DIGITAL TEMPERATURE CONTROL & TIMER

WAFFLE BAKERS SNACK

SmartChef

FEATURES

- Machine body manufactured from stainless steel
- The handles are manufactured from heat-resistant material
- Fitted with a timer
- A removable tray around the bottom of the work surface is used to collect excess dough for easy cleaning
- Baking plates manufactured from heavy duty cast iron
- Thermostat controlled
- Fitted with (4x) non-slip feet



BELGIAN - DOUBLE

SPECIFICATIONS

MODEL	SmartChef HWB-2S
ELECTRICITY	3.2kW, 230V, Single Phase
DIMENSIONS	570 x 380 x 250mm high
WEIGHT	20.5kg
BAKING SURFACE	(2x) 220 x 220mm
TEMPERATURE RANGE	50 ~ 300°C

ORDER CODE WBS0002



BELGIAN - SINGLE

SPECIFICATIONS

MODEL	SmartChef HWB-1S
ELECTRICITY	1.6kW, 230V, Single Phase
DIMENSIONS	290 x 330 x 250mm high
WEIGHT	7.5kg
BAKING SURFACE	220 x 220mm
TEMPERATURE RANGE	50 ~ 300°C

ORDER CODE WBS0001



WAFFLE LOLLY WAFFLE ON A STICK

SPECIFICATIONS

MODEL	SmartChef HX-2208
ELECTRICITY	1.7kW, 230V, Single Phase
DIMENSIONS	330 x 365 x 235mm high
WEIGHT	10kg
CAPACITY	4 Rows
SINGLE WAFFLE SIZE	225 x 60 x 15mm
TEMPERATURE RANGE	50 ~ 300°C

ORDER CODE WBS2001



ROUND WAFFLE BAKERS
SNACK

FEATURES

- Machine body manufactured from stainless steel
- Fitted with heat-insulated handles
- Fitted with a timer
- Fitted with (4x) non-slip feet
- Baking plates manufactured from non-stick, heavy duty, cast iron
- Thermostat controlled
- A removable tray around the bottom of the work surface is used to collect excess dough for easy cleaning



DOUBLE
SPECIFICATIONS

MODEL	SmartChef HWB-2
ELECTRICITY	2kW, 230V, Single Phase
DIMENSIONS	500 x 350 x 260mm high
WEIGHT	11kg
BAKING SURFACE	(2x) 170mm Ø
TEMPERATURE RANGE	50 ~ 300°C

ORDER CODE **WBS1002**



SINGLE
SPECIFICATIONS

MODEL	SmartChef HWB-1
ELECTRICITY	1kW, 230V, Single Phase
DIMENSIONS	250 x 350 x 260mm high
WEIGHT	6kg
BAKING SURFACE	170mm Ø
TEMPERATURE RANGE	50 ~ 300°C

ORDER CODE **WBS1001**





COMBI STEAMERS & CONVECTION OVENS





FEATURES

- Patented fan guard system *Airflowlogic™*
- Patented system for direct steam *Humilogic™*
- Patented system for cooking chamber drying *Drylogic™*
- Outer casing manufactured from AISI 304 stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Door is right hand hinged with adjustable door hinges and handle catch
- 10 Levels of direct steam controlled by a touch control panel situated on the right hand side of the door
- Fitted with quick selection knob for the touch screen
- The side supports and drip tray can easily be removed for cleaning
- Fitted with 4 bidirectional fan motors for even heat distribution
- 500 Programmable recipes
- Delayed start function up to 23 hours and 59 minutes
- Supplied with multipoint core prob
- Supplied without trays and grids
- IPX5 protection rating against water
- 42 Language settings for the control panel
- Humidity management software installed
- Automatic washing system integrated
- Supplied without chemicals

** It is recommend that all combi steamers be installed with water treatment system



20 PAN GASTRONOMY

SPECIFICATIONS

MODEL	EKA MKF 2011 TS
ELECTRICITY	31kW, 380V, 3 Phase + N
DIMENSIONS	930 x 1035 x 1900mm high
WEIGHT	247kg
CHAMBER DIMENSIONS	710 x 551 x 1440mm high
TEMPERATURE RANGE	30 ~ 270°C
NUMBER OF PROGRAMS	500
PROGRAMMABLE COOKING STEPS	10
PRE-HEATING TEMPERATURE	180°C

ORDER CODE

MKF2011TS



Supplied with 20 pan gastronomy trolley with handle

CAPACITY	(20x) 1/1 GN Pans
RUNNER SPACING	66mm
ORDER CODE	EKF-EKCR20TC

Convert your oven to a 16 tray baking oven by changing trolleys

CAPACITY	(16x) 600 x 400 baking trays
RUNNER SPACING	80mm
ORDER CODE	EKF-EKCR16TC

OPTIONAL EXTRAS (FULL SPECS • PAGE 70 - 71)

INSERTS

- 1/1 GN PAN - 55mm
- 1/1 GN PAN - 55mm (perforated)
- 1/1 GN PAN - 40mm
- 1/1 GN PAN - 40mm (perforated)

GNF8055
GNF8055.P
GNF8040
GNF8040.P

GRIDS

- 1/1 GN GRID

OGS0011

BAKING TRAYS

- 600 x 400 x 30mm

BTA0064

CLEANING

- CLEANING DETERGENT


MKF-MKDET



FEATURES

- Outer casing manufactured from AISI 304 stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- Manual hand spray/wash can be fitted
- 5 Levels of direct steam controlled by a manual control panel situated on the right hand side of the door
- Fitted with a condensate collection bowl, with drain on door
- Fitted with 4 bidirectional fan motors for even heat distribution
- IPX4 protection rating against water
- Timer for cooking from 10 to 120 minutes / infinity
- Supplied without stand
- Supplied without trays and grids
- Supplied without chemicals

** It is recommend that all combi steamers be installed with water treatment system

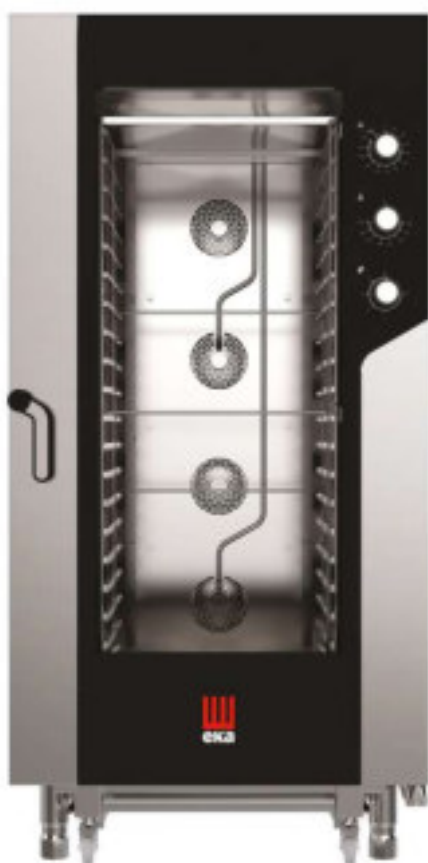

20 PAN GASTRONOMY

SPECIFICATIONS

MODEL	EKA MKF 2011 S
ELECTRICITY	31kW, 380V, 3 Phase + N
DIMENSIONS	930 x 1041 x 1900mm high
WEIGHT	247kg
CHAMBER DIMENSIONS	710 x 551 x 1440mm high
TEMPERATURE RANGE	30 ~ 270°C
PRE-HEATING TEMPERATURE	180°C

ORDER CODE

MKF2011S



Supplied with 20 pan gastronomy trolley with handle

CAPACITY	(20x) 1/1GN Pans
RUNNER SPACING	66mm
ORDER CODE	EKF-EKCR20TC

Convert your oven to a 16 tray baking oven by changing trolleys

CAPACITY	(16x) 600 x 400 baking trays
RUNNER SPACING	80mm
ORDER CODE	EKF-EKCR16TC

OPTIONAL EXTRAS (FULL SPECS • PAGE 70 - 71)

INSERTS

- 1/1 GN PAN - 55mm
- 1/1 GN PAN - 55mm (perforated)
- 1/1 GN PAN - 40mm
- 1/1 GN PAN - 40mm (perforated)

GNF8055
GNF8055.P
GNF8040
GNF8040.P

GRIDS

- 1/1 GN GRID

OGS0011

BAKING TRAYS

- 600 x 400 x 30mm

BTA0064

CLEANING

- MANUAL SPAY KIT

EKF-EKKD



FEATURES

- Patented technology Airflowlogic™ / Humilogic™ / Drylogic™
- Outer casing manufactured from AISI 304 stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- 10 Levels of direct steam controlled by a touch control panel situated on the right hand side of the door
- IPX5 protection rating against water
- 42 Language settings for the control panel
- Humidity management software installed
- Automatic washing system integrated
- Stand, trays and grids NOT supplied
- Fitted with quick selection knob for the touch screen
- 500 Programmable recipes
- Fitted with a Wi-fi communication system
- Delayed start function up to 23 hours and 59 minutes
- Multipoint core probe included

** It is recommend that all combi steamers be installed with water treatment system



11 PAN GASTRONOMY

SPECIFICATIONS

MODEL	EKA MKF 1111 TS
ELECTRICITY	15.4kW, 380V, 3 Phase + N
DIMENSIONS	730 x 850 x 1130mm high
WEIGHT	114kg
CAPACITY	(11x) 1/1 GN pans
RUNNER SPACING	68mm
NUMBER OF FANS	(2x) bidirectional
TEMPERATURE RANGE	30 ~ 270°C
NO. OF PROGRAMS	500
PROG. COOKING STEPS	10
PRE-HEAT TEMPERATURE	180°C

ORDER CODE

MKF1111TS



7 PAN GASTRONOMY

SPECIFICATIONS

MODEL	EKA MKF 711 TS
ELECTRICITY	11.4kW, 380V, 3 Phase + N
DIMENSIONS	730 x 850 x 850mm high
WEIGHT	96kg
CAPACITY	(7x) 1/1 GN pans
RUNNER SPACING	68mm
NUMBER OF FANS	(2x) bidirectional
TEMPERATURE RANGE	30 ~ 270°C
NO. OF PROGRAMS	500
PROG. COOKING STEPS	10
PRE-HEAT TEMPERATURE	180°C

ORDER CODE

MKF711TS



OPTIONAL EXTRAS (FULL SPECS • PAGE 70 - 71)

INSERTS

1/1 GN PAN - 55mm	GNF8055
1/1 GN PAN - 55mm (perforated)	GNF8055.P
1/1 GN PAN - 40mm	GNF8040
1/1 GN PAN - 40mm (perforated)	GNF8040.P

GRIDS

1/1 GN GRID	OGS0011
-------------	---------

STANDS

Stand for MKF1111TS	MKF-MKTS1111-L
Stand for MKF711TS	MKF-MKTS711-L

CLEANING

CLEANING DETERGENT	MKF-MKDET
--------------------	-----------



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- Manual hand spray/wash can be fitted
- 5 Levels of direct steam controlled by a manual control panel situated on the right hand side of the door
- IPX4 protection rating against water
- Timer for cooking from 10 to 120 minutes / infinity
- Supplied without trays and grids
- Fitted with a condensate collection bowl, with drain on door
- Supplied without stand
- Fitted with 2 bidirectional fan motors for even heat distribution

**** It is recommend that all combi steamers be installed with water treatment system**



11 PAN GASTRONOMY

SPECIFICATIONS

MODEL	EKA MKF 1111 S
ELECTRICITY	15.4kW, 380V, 3 Phase + N
DIMENSIONS	730 x 855 x 1130mm high
WEIGHT	114kg
CAPACITY	(11x) 1/1 GN pans
RUNNER SPACING	68mm
NUMBER OF FANS	(2x) bidirectional
TEMPERATURE RANGE	30 ~ 270 °C

ORDER CODE

MKF1111S



7 PAN GASTRONOMY

SPECIFICATIONS

MODEL	EKA MKF 711 S
ELECTRICITY	10.4kW, 380V, 3 Phase + N
DIMENSIONS	730 x 855 x 850mm high
WEIGHT	96kg
CAPACITY	(7x) 1/1 GN pans
RUNNER SPACING	68mm
NUMBER OF FANS	(2x) bidirectional
TEMPERATURE RANGE	30 ~ 270 °C

ORDER CODE

MKF711S



OPTIONAL EXTRAS (FULL SPECS • PAGE 70 - 71)

INSERTS

1/1 GN PAN - 55mm	GNF8055
1/1 GN PAN - 55mm (perforated)	GNF8055.P
1/1 GN PAN - 40mm	GNF8040
1/1 GN PAN - 40mm (perforated)	GNF8040.P

GRIDS

1/1 GN GRID	OGS0011
-------------	---------

STANDS

Stand for MKF1111TS	MKF-MKTS1111-L
Stand for MKF711TS	MKF-MKTS711-L

CLEANING

MANUAL SPRAY KIT	EKF-EKKD
------------------	----------



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- Manual hand spray/wash can be fitted
- 5 Levels of direct steam controlled by a manual control panel situated on the right hand side of the door
 - IPX4 protection rating against water
 - Supplied without stand
 - Fitted with bidirectional fan motors for even heat distribution
- Fitted with a condensate collection bowl, with drain on door
- Timer for cooking from 10 to 120 minutes / infinity
- Supplied without trays and grids

**** It is recommend that all combi steamers be installed with water treatment system**



10 TRAY BAKERY

SPECIFICATIONS

MODEL	EKA MKF 1064 S
ELECTRICITY	15.4kW, 380V, 3 Phase + N
DIMENSIONS	850 x 1041 x 1130mm high
WEIGHT	140kg
CAPACITY	(10x) 600 x 400mm trays
RUNNER SPACING	80mm
NUMBER OF FANS	(3x) bidirectional
TEMPERATURE RANGE	30 ~ 270 °C

ORDER CODE

MKF1064S



6 TRAY BAKERY

SPECIFICATIONS

MODEL	EKA MKF 664 S
ELECTRICITY	10.4kW, 380V, 3 Phase + N
DIMENSIONS	850 x 1041 x 850mm high
WEIGHT	108kg
CAPACITY	(6x) 600 x 400mm trays
RUNNER SPACING	80mm
NUMBER OF FANS	(2x) bidirectional
TEMPERATURE RANGE	30 ~ 270 °C

ORDER CODE

MKF664S



OPTIONAL EXTRAS (FULL SPECS • PAGE 70 - 71)

BAKING TRAYS

600 x 400 x 30mm

BTA0064

GRIDS

600 x 400mm Grid

OGS0064

STANDS

Stand for MKF1064S
Stand for MKF664S

MKF-MKTS1064-L
MKF-MKTS664-L

CLEANING

MANUAL SPRAY KIT

EKF-EKKD



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- Manual hand spray/wash can be fitted
- 5 Levels of direct steam controlled by a manual control panel situated on the right hand side of the door
 - IPX4 protection rating against water
 - Supplied without stand
 - Fitted with bidirectional fan motors for even heat distribution
- Fitted with a condensate collection bowl, with drain on door
- Timer for cooking from 10 to 120 minutes / infinity
- Supplied without trays and grids

**** It is recommend that all combi steamers be installed with water treatment system**



11 PAN GASTRONOMY

SPECIFICATIONS

MODEL	EKA MKF 1111 GS
BTU RATING	60 000
ELECTRICITY	0.7kW, 220V, Single Phase
DIMENSIONS	730 x 855 x 1231mm high
WEIGHT	141kg
CAPACITY	(11x) 1/1 GN pans
RUNNER SPACING	68mm
NUMBER OF FANS	(3x) bidirectional
TEMPERATURE RANGE	30 ~ 270 °C

ORDER CODE

MKF1111GS



10 TRAY BAKERY

SPECIFICATIONS

MODEL	EKA MKF 1064 GS
BTU RATING	61 000
ELECTRICITY	0.7kW, 220V, Single Phase
DIMENSIONS	850 x 1041 x 1231mm high
WEIGHT	158kg
CAPACITY	(10x) 600 x 400mm pans
RUNNER SPACING	80mm
NUMBER OF FANS	(3x) bidirectional
TEMPERATURE RANGE	30 ~ 270 °C

ORDER CODE

MKF1064GS



OPTIONAL EXTRAS (FULL SPECS • PAGE 70 - 71)

INSERTS for MKF1111GS

1/1 GN PAN - 55mm
1/1 GN PAN - 55mm (perforated)
1/1 GN PAN - 40mm
1/1 GN PAN - 40mm (perforated)

GNF8055
GNF8055.P
GNF8040
GNF8040.P

STANDS

Stand for MKF1111GS
Stand for MKF1064GS

MKF-MKTS1111-L
MKF-MKTS1064-L

BAKING TRAYS for MKF1064GS

600 x 400 x 30mm

BTA0064

GRIDS

1/1 GN GRID (for MKF1111GS)
600 x 400mm Grid (for MKF1064GS)

OGS0011
OGS0064

CLEANING KIT


MANUAL SPRAY KIT

EKF-EKKD



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- Manual hand spray/wash can be fitted
- 5 Levels of direct steam controlled by a manual control panel situated on the right hand side of the door
- Fitted with a condensate collection bowl, with drain on door
- Timer for cooking from 10 to 120 minutes / infinity
- Supplied without trays and grids
- IPX3 protection rating against water
- Supplied without stand
- Fitted with bidirectional fan motors for even heat distribution

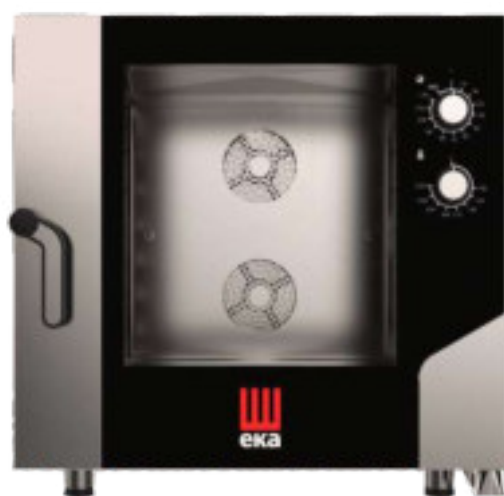


6 TRAY

SPECIFICATIONS

MODEL	EKA MKF 664 SP
ELECTRICITY	10.4kW, 380V, 3 Phase + N
DIMENSIONS	850 x 1041 x 850mm high
WEIGHT	108kg
CAPACITY	(6x) 600 x 400mm pans
RUNNER SPACING	80mm
NUMBER OF FANS	(2x) bidirectional
TEMPERATURE RANGE	30 ~ 270 °C

ORDER CODE

MKF664SP

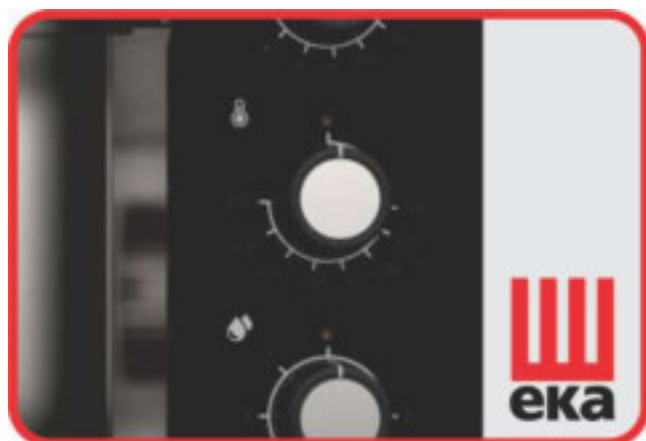

OPTIONAL EXTRAS (FULL SPECS • PAGE 70 - 71)

BAKING TRAYS

600 x 400 x 30mm

BTA0064

GRIDS

600 x 400mm Grid

OGS0064

STAND

Stand for MKF664SP

MKF-MKTS664-L



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- 2 halogen lights inside the cooking chamber
- The side supports and drip tray can easily be removed for cleaning
- 10 Levels of direct steam controlled by a digital control panel situated below the door
- Fitted with 2 bidirectional fan motors for even heat distribution
- IPX3 protection rating against water
- Bottom hinged door
- Supplied without trays and grids
- *It is recommend that all combi steamers be installed with water treatment system*

4 PAN DIGITAL CONTROL

SPECIFICATIONS

MODEL	EKA EKF 416 DUD
ELECTRICITY	6.4kW, 380V, 3 Phase + N
DIMENSIONS	790 x 750 x 635mm high
WEIGHT	58kg
CHAMBER DIM	660 x 445 x 380mm high
CAPACITY	(4x) 1/1 GN pans (4x) 600 x 400mm trays

RUNNER SPACING	73mm
TEMPERATURE RANGE	30 ~ 270°C
NUMBER OF PROGRAMS	99
PROG. COOKING STEPS	4
PRE-HEAT TEMPERATURE	180°C

ORDER CODE

EKF416DUD



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED bar fitted into the door
- Available in bottom or right hand hinged door models
- 5 Levels of direct steam controlled by a electromechanical control panel situated on the left hand side of the door
- The side supports and drip tray can easily be removed for cleaning
- Fitted with 2 bidirectional fan motors for even heat distribution
- IPX3 protection rating against water
- Supplied without trays and grids
- *It is recommend that all combi steamers be installed with water treatment system*

4 PAN MANUAL CONTROL

SPECIFICATIONS

ELECTRICITY	6.4kW, 380V, 3 Phase + N
DIMENSIONS	790 x 785 x 635mm high
WEIGHT	57kg
CHAMBER DIMENSIONS	660 x 430 x 380mm high
CAPACITY	(4x) 1/1 GN pans (4x) 600 x 400mm trays
RUNNER SPACING	73mm
TEMPERATURE RANGE	30 ~ 270°C

RIGHT HAND HINGED DOOR

MODEL	EKA EKF 416 ALUD
ORDER CODE	EKF416ALUD

BOTTOM HINGED DOOR

MODEL	EKA EKF 416 UD
ORDER CODE	EKF416UD



OPTIONAL EXTRAS (FULL SPECS • PAGE 70 - 71)

INSERTS

1/1 GN PAN - 65mm	GNF8065
1/1 GN PAN - 65mm (perforated)	GNF8065.P

BAKING TRAYS

600 x 400 x 20mm	BTA0013
------------------	---------

OVEN STAND

ORDER CODE	SOE0416
------------	---------

GRIDS

1/1 GN GRID	OGS0011
600 x 400mm GRID	OGS0064

CLEANING

MANUAL SPRAY KIT	EKF-EKKD
------------------	----------



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick AISI 430 18/10 stainless steel with fully rounded edges
- 1 halogen light fitted into the cooking chamber
- The side supports and drip tray can easily be removed for cleaning
- Electromechanical control panel fitted at the bottom of the door
- Fitted with 2 bidirectional fan motors for even heat distribution
- IPX3 protection rating against water
- Stackable
- Supplied without trays and grids
- Bottom hinged door
- Supplied without stand



HUMIDIFICATION (PULSE)

4 PAN WITH HUMIDIFICATION

SPECIFICATIONS

MODEL	EKA EKF 416
ELECTRICITY	3.4kW, 220V, Single Phase
DIMENSIONS	790 x 750 x 635mm high
WEIGHT	51kg
CHAMBER DIMENSIONS	660 x 445 x 380mm high

CAPACITY	(4x) 1/1 GN pans (4x) 600 x 400mm trays
RUNNER SPACING	73mm
TEMPERATURE RANGE	50 ~ 300°C

ORDER CODE

EKF416



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick AISI 304 18/10 stainless steel with fully rounded edges
- 1 halogen light fitted into the cooking chamber
- Available in bottom or right hand hinged door models
- The side supports and drip tray can easily be removed for cleaning
- Electromechanical control panel situated at the bottom of the door
- Fitted with a bidirectional fan motor for even heat distribution
- IPX3 protection rating against water
- Supplied without trays and grids
- Stackable
- Supplied without stand

4 PAN

SPECIFICATIONS

ELECTRICITY	6.2kW, 380V, 2 Phase + N
DIMENSIONS	790 x 750 x 635mm high
WEIGHT	51kg
CHAMBER DIMENSIONS	660 x 445 x 380mm high
CAPACITY	(4x) 1/1 GN Pans (4x) 600 x 400mm trays
RUNNER SPACE	73mm
TEMP RANGE	50 ~ 300°C

RIGHT HAND HINGED DOOR

MODEL	EKA EKF 416 ALP
ORDER CODE	EKF416ALP

BOTTOM HINGED DOOR

MODEL	EKA EKF 416 P
ORDER CODE	EKF416P



OPTIONAL EXTRAS (FULL SPECS • PAGE 70 - 71)

BAKING TRAY

600 x 400 x 20mm

BTA0013

OVEN GRIDS

1/1 GN GRID
600 x 400mm GRID

OGS0011
OGS0064

OVEN STAND

ORDER CODE

SOE0416



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick AISI 304 18/10 stainless steel with fully rounded edges
- 1 halogen light fitted into the cooking chamber
- The side supports and drip tray can easily be removed for cleaning
- Bottom hinged door
- Electromechanical control panel situated at the bottom of the door
- Fitted with 1 unidirectional fan motor for even heat distribution
- (8x) Baking functions - Traditional (static), convection, grilling and combinations of the before mentioned
- IPX3 protection rating against water
- Supplied without stand
- Supplied with (4x) 430 x 345mm baking sheets
- Stackable
- Supplied without grids

4 PAN MULTI-FUNCTIONAL

SPECIFICATIONS

MODEL	EKA EKF 423 M
ELECTRICITY	2.8kW, 220V, Single Phase
DIMENSIONS	590 x 695 x 590mm high
WEIGHT	35kg
CHAMBER DIMENSIONS	450 x 395 x 330mm high

CAPACITY	(4x) 430 x 345mm trays
RUNNER SPACING	73mm
TEMPERATURE RANGE	50°C ~ 300°C

ORDER CODE

EKF423M



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick AISI 304 18/10 stainless steel with fully rounded edges
- 1 halogen light fitted into the cooking chamber
- The side supports and drip tray can easily be removed for cleaning
- Bottom hinged door
- Electromechanical control panel situated at the top of the door
- Fitted with a unidirectional fan motor for even heat distribution
- IPX3 protection rating against water
- Supplied without stand
- Supplied with (4x) 430 x 345mm baking sheets
- Stackable
- Supplied without grids

4 PAN MANUAL CONTROL

SPECIFICATIONS

MODEL	EKA EKF 423 P
ELECTRICITY	2.8kW, 220V, Single Phase
DIMENSIONS	590 x 695 x 590mm high
WEIGHT	35kg
CHAMBER DIMENSIONS	450 x 395 x 330mm high

CAPACITY	(4x) 430 x 345mm trays
RUNNER SPACING	73mm
TEMPERATURE RANGE	50°C ~ 300°C

ORDER CODE

EKF423



OPTIONAL EXTRAS (FULL SPECS • PAGE 70 - 71)

BAKING TRAY

435 x 315 x 10mm

BTA0043

OVEN GRID

435 x 315mm GRID

COA2003

OVEN STAND

ORDER CODE

SOE0423

OPTIONAL EXTRAS - EKA COMBI STEAMERS & CONVECTION OVENS

FULL SPECIFICATIONS

PUSH-IN TROLLEYS



FEATURES

- Manufactured from AISI 304 Stainless steel
- Fitted with 4 robust castors, 2 lockable
- Fitted with removable handle



20 PAN PUSH-IN GASTRONOMY TROLLEY

SPECIFICATIONS

MODEL	EKA EKCR20TC
DIMENSIONS	740 x 561 x 1750mm high
WEIGHT	34kg
CAPACITY	(20x) 1/1 GN pans
RUNNER SPACING	66mm
ORDER CODE	EKF-EKCR20TC

16 TRAY PUSH-IN BAKING TROLLEY

SPECIFICATIONS

MODEL	EKA EKCR16TC
DIMENSIONS	740 x 561 x 1750mm high
WEIGHT	34kg
CAPACITY	(16x) 600 x 400mm baking tray
RUNNER SPACING	80mm
ORDER CODE	EKF-EKCR16TC

COMPATIBLE WITH THE FOLLOWING MODELS

- EKA MKF 2011 TS
- EKA MKF 2011 S

INSERTS

- 1/1GN - 65mm deep
- 1/1GN - 65mm (perforated)
- 1/1GN - 55mm deep
- 1/1GN - 55mm (perforated)
- 1/1GN - 40mm deep
- 1/1GN - 40mm (perforated)

GNF8065
GNF8065.P
GNF8055
GNF8055.P
GNF8040
GNF8040.P

BAKING TRAYS

- 600 x 400 x 30mm deep
- 600 x 400 x 20mm deep
- 435 x 315 x 10mm deep

BTA0064
BTA0013
BTA0043

GRIDS

- OVEN GRID - 1/1 GN
- OVEN GRID - 600 x 400mm
- OVEN GRID - 435 x 315mm
- COOLING GRID - 600 x 400mm

OGS0011
OGS0064
COA2003
CTS0064



CORE PROBE FOR MILLENNIAL OVENS



CORE PROBE - with support and 1300mm cable
ORDER CODE **EKF-EKSCS**

CLEANING & FLUSHING



MANUAL SPRAY KIT
ORDER CODE

EKF-EKGD

CLEANING DETERGENT for Millennial Touch Ovens
ORDER CODE **MKF-MKDET**

OVEN STANDS

FEATURES

- Runners to accommodate GN Pans, 600 x 400mm or 435 x 315mm baking trays
- Manufactured from 1.2mm thick, 430 Stainless steel
- Fitted with 4 height adjustable plastic feet



HEIGHT
ADJUSTABLE FEET



STURDY STAINLESS STEEL
CONSTRUCTION

11 PAN MILLENNIAL OVENS

SPECIFICATIONS

DIMENSIONS 600 x 730 x 750mm high
WEIGHT 23kg
RUNNER SPACING 40mm
COMPATIBLE WITH EKA MKF 1111 TS
EKA MKF 1111 S
EKA MKF 1111 GS



ORDER CODE

MKF-MKTS1111-L

7 PAN MILLENNIAL OVENS

SPECIFICATIONS

DIMENSIONS 600 x 730 x 900mm high
WEIGHT 28kg
RUNNER SPACING 40mm
COMPATIBLE WITH EKA MKF 711 TS
EKA MKF 711 S



ORDER CODE

MKF-MKTS711-L

10 PAN MILLENNIAL OVENS

SPECIFICATIONS

DIMENSIONS 790 x 850 x 750mm high
WEIGHT 30kg
RUNNER SPACING 40mm
COMPATIBLE WITH EKA MFK 1064 S
EKA MFK 1064 GS



ORDER CODE

MKF-MKTS1064-L

6 PAN MILLENNIAL OVENS

SPECIFICATIONS

DIMENSIONS 790 x 850 x 900mm high
WEIGHT 35kg
RUNNER SPACING 40mm
COMPATIBLE WITH EKA MFK 664 S
EKA MFK 664 SP



ORDER CODE

MKF-MKTS664-L

4 PAN EVOLUTION OVENS

SPECIFICATIONS

DIMENSIONS 800 x 750 x 850mm high
WEIGHT 19kg
RUNNER SPACING 70mm
COMPATIBLE WITH EKA EKF 416 DUD
EKA EKF 416 UD
EKA EKF 416 ALUD
EKA EKF 416
EKA EKF 416 P
EKA EKF 416 ALP



ORDER CODE

SOE0416

4 PAN CONVECTION OVENS

SPECIFICATIONS

DIMENSIONS 600 x 700 x 850mm high
WEIGHT 17kg
RUNNER SPACING 70mm
COMPATIBLE WITH EKA EKF 423 M
EKA EKF 423 P



ORDER CODE

SOE0423



MODEL	EKA MKF 2011 TS ⚡	EKA MKF 2011 S ⚡	EKA MKF 1111 TS ⚡	
CAPACITY	(20x) 1/1 GN Pans or *(16x) 600 x 400mm Baking Trays	(20x) 1/1 GN Pans or *(16x) 600 x 400mm Baking Trays	(11x) 1/1 GN Pans	
RUNNER SPACING	66mm	66mm	68mm	
ELEC / BTU RATING	31kW, 380V, 3 Phase + N	31kW, 380V, 3 Phase + N	15.4kW, 380V, 3 Phase + N	
CONTROL PANEL	Touch Control with Quick Selection knob	Manual Control	Touch Control with Quick Selection knob	
BAKING	✓	✓	✓	
ROASTING	✓	✓	✓	
STEAMING	✓	✓	✓	
STEAM METHOD	Direct Steam - 10 Levels	Direct Steam - 5 Levels	Direct Steam - 10 Levels	

*16 pan capacity available with optional 16 pan trolley



MODEL	EKA MKF 1064 S ⚡	EKA MKF 1064 GS ⚡	EKA MKF 711 TS ⚡	
CAPACITY	(10x) 600 x 400mm Baking Trays	(10x) 600 x 400mm Baking Trays	(7x) 1/1 GN Pans	
RUNNER SPACING	80mm	80mm	68mm	
ELEC / BTU RATING	15.4kW, 380V, 3 Phase + N	0.7kW, 220V, Single Phase / 61 000	11.4kW, 380V, 3 Phase + N	
CONTROL PANEL	Manual Control	Manual Control	Touch Control with Quick Selection knob	
BAKING	✓	✓	✓	
ROASTING	✓	✓	✓	
STEAMING	✓	✓	✓	
STEAM METHOD	Direct Steam - 5 Levels	Direct Steam - 5 Levels	Direct Steam - 10 Levels	



MODEL	EKA EKF 416 DUD ⚡	EKA EKF 416 UD / ALUD ⚡	EKA EKF 416 P / ALP ⚡	
CAPACITY	(4x) 1/1 GN Pans (4x) 600 x 400mm Baking Trays	(4x) 1/1 GN Pans (4x) 600 x 400mm Baking Trays	(4x) 1/1 GN Pans (4x) 600 x 400mm Baking Trays	
RUNNER SPACING	73mm	73mm	73mm	
ELEC / BTU RATING	6.4kW, 380V, 3 Phase + N	6.4kW, 380V, 3 Phase + N	6.2kW, 380V, 3 Phase + N	
CONTROL PANEL	Digital Control	Manual Control	Manual Control	
BAKING	✓	✓	✓	
ROASTING	✓	✓	✓	
STEAMING	✓	✓	-	
STEAM METHOD	Direct Steam - 10 Levels	Direct Steam - 5 Levels	-	



	EKA MKF 1111 S ⚡	EKA MKF 1111 GS ⚡
	(11x) 1/1 GN Pans	(11x) 1/1 GN Pans
	68mm	68mm
	15.4kW, 380V, 3 Phase + N	0.7kW, 220V, Single Phase / 60 000
	Manual Control	Manual Control
	✓	✓
	✓	✓
	✓	✓
	Direct Steam - 5 Levels	Direct Steam - 5 Levels



	EKA MKF 711 S ⚡	EKA MKF 664 S ⚡	EKA MKF 664 SP ⚡
	(7x) 1/1 GN Pans	(6x) 600 x 400mm Baking Trays	(6x) 600 x 400mm Baking Trays
	68mm	80mm	80mm
	11.4kW, 380V, 3 Phase + N	10.4kW, 380V, 3 Phase + N	10.4kW, 380V, 3 Phase + N
	Manual Control	Manual Control	Manual Control
	✓	✓	✓
	✓	✓	✓
	✓	✓	✓
	Direct Steam - 5 Levels	Direct Steam - 5 Levels	Direct Steam - 5 Levels



	EKA EKF 416 ⚡	EKA EKF 423 M ⚡	EKA EKF 423 ⚡
	(4x) 1/1 GN Pans (4x) 600 x 400mm Baking Trays	(4x) 430 x 345mm Baking Trays	(4x) 430 x 345mm Baking Trays
	73mm	73mm	73mm
	3.4kW, 380V, 3 Phase + N	2.6kW, 240V, Single Phase	2.6kW, 240V, Single Phase
	Manual Control	Manual Control	Manual Control
	✓	✓	✓
	✓	✓	✓
	-	-	-
	Indirect steam with button	-	-

BAKERY CONVECTION OVENS ELECTRIC



FEATURES

- Manufactured from 201 non-magnetic stainless steel
- Doors are fitted with tempered glass
- Internal lighting for improved view of the product
- Fitted with a heavy duty door handle
- Fitted with bi-directional fans
- Adjustable air duct, for more baking varieties
- Timer and Steam function
- RX10D fitted with (4x) adjustable feet. RX6D fitted with (4x) non-slip feet



10 TRAY

SPECIFICATIONS

MODEL	BakeMark RX10D
ELECTRICITY	18kW, 380V, 3 Phase + N
DIMENSIONS	930 x 1320 x 1550mm high
WEIGHT	250kg
CAPACITY	(10x) 600 x 400mm trays
RUNNER SPACING	80mm
TEMPERATURE RANGE	90 ~ 300°C

ORDER CODE

COB-RX10D



OPTIONAL STAND

DIMENSIONS	920 x 1000 x 480mm high
RUNNER SPACING	40mm

ORDER CODE

SOB0010

6 TRAY

SPECIFICATIONS

MODEL	BakeMark RX6D
ELECTRICITY	9kW, 380V, 3 Phase + N
DIMENSIONS	910 x 1370 x 890mm high
WEIGHT	170kg
CAPACITY	(6x) 600 x 400mm trays
RUNNER SPACING	80mm
TEMPERATURE RANGE	90 ~ 300°C

ORDER CODE

COB-RX6D



OPTIONAL STAND

DIMENSIONS	910 x 1000 x 770mm high
RUNNER SPACING	40mm

ORDER CODE

SOB0006

OPTIONAL EXTRAS

BAKING TRAY

600 x 400 x 30mm

BTA0064

OVEN GRIDS

600 x 400mm

OGS0064

COOLING RACK

600 x 400mm

CTS0064



ADJUSTABLE AIR DUCTS



BI-DIRECTIONAL FANS



HEAVY DUTY HANDLE

DOUGH PROOFERS ELECTRIC



FEATURES

- Manufactured from 201 stainless steel
- Polyurethane foam insulation
- Fitted with a fan circulation system, more uniform proofing effect
- Automatic hydration system - inlet and outlet
- Micro-computer /digital display control panel with timing function
- Big tempered glass windows for improved viewing of the proofing process
- Fitted with (4x) castors

32 TRAY

SPECIFICATIONS

MODEL	BakeMark XF32B
ELECTRICITY	3.2kW, 230V, Single Phase
DIMENSIONS	1020 x 820 x 1980mm high
WEIGHT	110kg
CAPACITY	(32x) 600 x 400mm trays
TEMPERATURE RANGE	20 ~ 60°C
HUMIDITY	80 ~ 90%

ORDER CODE

PCB-XF32B



16 TRAY

SPECIFICATIONS

MODEL	BakeMark XF16B
ELECTRICITY	2.4kW, 230V, Single Phase
DIMENSIONS	500 x 770 x 1980mm high
WEIGHT	55kg
CAPACITY	(16x) 600 x 400mm trays
TEMPERATURE RANGE	20 ~ 60°C
HUMIDITY	80 ~ 90%

ORDER CODE

PCB-XF16B



FEATURES

- Manufactured from 201 stainless steel
- Polyurethane foam insulation
- Fitted with a fan circulation system, more uniform proofing effect
- Automatic hydration system - inlet and outlet
- Manual control panel with timing function
- Tempered glass window for improved viewing of the proofing process
- Fitted with (4x) castors
- Stackable with the BakeMark RX6D convection oven

10 TRAY

SPECIFICATIONS

MODEL	BakeMark XF10
ELECTRICITY	3kW, 230V, Single Phase
DIMENSIONS	930 x 1200 x 750mm high
WEIGHT	80kg
CAPACITY	(10x) 600 x 400mm trays
RUNNER SPACING	80mm
TEMPERATURE RANGE	20 ~ 60°C
HUMIDITY	80 ~ 90%

ORDER CODE

PCB-XF10



STACKABLE

OPTIONAL EXTRAS

BAKING TRAY

600 x 400 x 30mm

BTA0064

OVEN GRIDS

600 x 400mm

OGS0064

COOLING RACK

600 x 400mm

CTS0064

PROFESSIONAL CHARCOAL OVENS



FEATURES

- Oven body manufactured from stainless steel
- Oven body is insulated
- Oven fitted with hood
- Oven fitted with removable ash drawer for easy cleaning
- Door bottom hinged for easy loading
- Fitted with dial thermometer
- Available in red (on special request)

890mm OVEN

SPECIFICATIONS

MODEL	Empero EMP.PKF-50-S
DIMENSIONS	890 x 825 x 648mm high (Hood + 646mm high)
WEIGHT	190kg
GRILL RACK DIMENSIONS	740 x 650mm
CAPACITY	20kg meat per hour
WORKING TEMPERATURE	250 ~ 500°C

CHARCOAL BLACK
FIRE RED

EMP.PKF-50-S
EMP.PKF-50-K



COLOUR OPTIONS



CHARCOAL BLACK



FIRE RED

710mm OVEN

SPECIFICATIONS

MODEL	Empero EMP.PKF-40-S
DIMENSIONS	710 x 730 x 666mm high (Hood + 646mm high)
WEIGHT	160kg
GRILL RACK DIMENSIONS	560 x 524mm
CAPACITY	20kg meat per hour
WORKING TEMPERATURE	250 ~ 500°C

CHARCOAL BLACK
FIRE RED

EMP.PKF-40-S
EMP.PKF-40-K



SHOWN WITH OPTIONAL CABINET & TOP GRILL



PROFESSIONAL CHARCOAL OVENS

OPTIONAL EXTRAS



890mm

SPECIFICATIONS

DIMENSIONS
WEIGHT

890 x 825 x 825mm high
73kg

ORDER CODE

EMP.PKF-50-D



CABINET

FEATURES

- Oven cabinet manufactured from stainless steel
- Fitted with robust castors

710mm

SPECIFICATIONS

DIMENSIONS
WEIGHT

710 x 725 x 825mm high
63kg

ORDER CODE

EMP.PKF-40-D



890mm

SPECIFICATIONS

DIMENSIONS
WEIGHT

890 x 825 x 825mm high
78kg

ORDER CODE

EMP.PKF-50-AS



STAND

FEATURES

- Oven Stand manufactured from painted mild steel
- Fitted with 2 shelves
- Fitted with 4 robust castors

710mm


SPECIFICATIONS

DIMENSIONS
WEIGHT

710 x 725 x 825mm high
60kg

ORDER CODE

EMP.PKF-40-AS

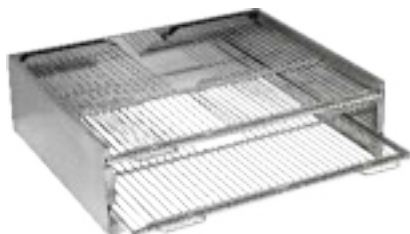

890mm

SPECIFICATIONS

DIMENSIONS
WEIGHT

890 x 825 x 210mm high
43kg

ORDER CODE

EMP.PKF-50-US



TOP GRID

FEATURES

- Manufactured from high quality stainless steel
- Supplied with 2 grids

710mm

SPECIFICATIONS

DIMENSIONS
WEIGHT

710 x 725 x 210mm high
33kg

ORDER CODE

EMP.PKF-40-US



PIZZA / DECK OVENS

ONE OVEN FOR PIZZA AND ARTISAN BREADS

FEATURES

- Robust stainless steel construction
- Bottom hinged doors for easy loading
- Steam function available on request
- Additional internal height for baking
- Expanded glass viewing window on oven door
- Top and bottom element controlled individually
- Ceramic base for pizza and artisan breads
- Compatible with 600 x 400mm baking trays



DOUBLE DECK OVEN - 4 TRAY

SPECIFICATIONS

MODEL	Prismafood Trays 66L
ELECTRICITY	20.4kW, 380V, 3 Phase + N
DIMENSIONS	1500 x 1080 x 745mm high
WEIGHT	225kg
CHAMBER DIMENSIONS	(2x) 1230 x 840 x 175mm high
CHAMBER CAPACITY	(4x) 600 x 400mm trays (6x) 40cm Pizzas
TEMPERATURE RANGE	50 ~ 500°C

ORDER CODE

DOP0066



DOUBLE DECK OVEN - 2 TRAY

SPECIFICATIONS

MODEL	Prismafood Trays 44
ELECTRICITY	14kW, 380V, 3 Phase + N
DIMENSIONS	1100 x 1080 x 745mm high
WEIGHT	172kg
CHAMBER DIMENSIONS	(2x) 820 x 840 x 175mm high
CHAMBER CAPACITY	(2x) 600 x 400mm trays (4x) 40cm Pizzas
TEMPERATURE RANGE	50 ~ 500°C

ORDER CODE

DOP0044



*WITH OPTIONAL PROVER AND HOOD



CERAMIC STONE BASE

PIZZA / DECK OVENS

OPTIONAL EXTRAS



PROOVER

FEATURES

- Stainless steel body with sturdy top to hold the oven weight
- Fitted with double glass doors for easy viewing of product
- Fitted with 4 casters, 2 lockable
- Steam function available on request

SPECIFICATIONS

MODEL	Prismafood Cella Inox 6L-66L
ELECTRICITY	2kW, 220V, Single Phase
DIMENSIONS	1500 x 965 x 900mm high
WEIGHT	107kg
CAPACITY	(18x) 600 x 400mm baking trays
RUNNER SPACING	90mm
TEMPERATURE RANGE	10 ~ 60°C
HUMIDIFICATION	Manual fill water container

ORDER CODE **PDP0066**

COMPATIBLE WITH Prismafood Trays 66 L



STANDS

SPECIFICATIONS

MODEL	Prismafood ST 66
DIMENSIONS	1520 x 982 x 960mm high
WEIGHT	44kg

ORDER CODE

SDP0066



SPECIFICATIONS

MODEL	Prismafood ST 44
DIMENSIONS	1117 x 982 x 960mm high
WEIGHT	39kg

ORDER CODE

SDP0044



HOODS

SPECIFICATIONS

MODEL	Prismafood KT6L-66L
DIMENSIONS	1500 x 1115 x 120mm high
WEIGHT	18kg

ORDER CODE

HDP0066



SPECIFICATIONS

MODEL	Prismafood KT4-44
DIMENSIONS	1110 x 1115 x 120mm high
WEIGHT	14kg

ORDER CODE

HDP0044



ELECTRIC PIZZA OVENS TABLE MODEL

SmartChef

FEATURES

- Robust construction
- Internal chamber lighting
- Fitted with a glass viewing windows
- Each deck fitted with a heat gauge
- Top and bottom element is individually controlled
- Fitted with a bottom hinged doors for easy loading
- Supplied with a ceramic pizza stone base
- Fitted with (4x) non-slip rubber feet



DOUBLE DECK SPECIFICATIONS

MODEL	SmartChef HEP-2
ELECTRICITY	8.4kW, 380V, 3 Phase + N
DIMENSIONS	890 x 790 x 750mm high
WEIGHT	90kg
CHAMBER DIMENSIONS	(2x) 610 x 610 x 170mm high
CHAMBER CAPACITY	(4x) 30cm Pizzas per deck
TEMPERATURE RANGE	50 ~ 400°C

ORDER CODE

POS2408




SINGLE DECK SPECIFICATIONS

MODEL	SmartChef HEP-1
ELECTRICITY	4.2kW, 380V, 3 Phase + N
DIMENSIONS	890 x 790 x 430mm high
WEIGHT	52kg
CHAMBER DIMENSIONS	(1x) 610 x 610 x 170mm high
CHAMBER CAPACITY	(4x) 30cm Pizzas per deck
TEMPERATURE RANGE	50 ~ 400°C

ORDER CODE


POS1404

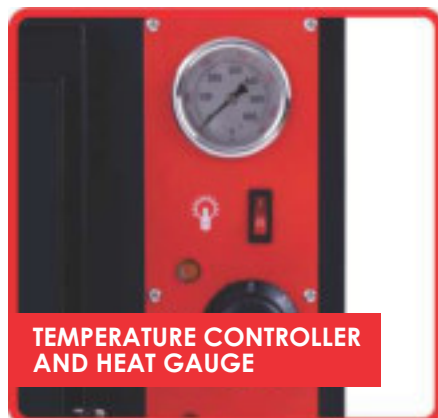

TEMPERATURE CONTROLLER
AND HEAT GAUGE



EACH DECK FITTED WITH A
CERAMIC PIZZA STONE BASE

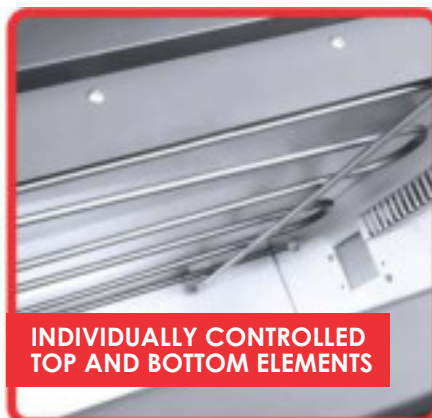

INDIVIDUALLY CONTROLLED
TOP AND BOTTOM ELEMENTS

ELECTRIC PIZZA OVENS TABLE MODEL

SmartChef

FEATURES

- Body manufactured from stainless steel
- Internal chamber lighting
- Fitted with a glass viewing window
- Fitted with (4x) non-slip rubber feet
- Top and bottom element is individually controlled
- Fitted with a bottom hinged door for easy loading
- Supplied with a pizza stone base



DOUBLE DECK SPECIFICATIONS

MODEL	SmartChef HEP-2ST
ELECTRICITY	3kW, 240V, Single Phase
DIMENSIONS	560 x 570 x 440mm high
WEIGHT	27kg
CHAMBER DIMENSIONS	(2x) 400 x 400 x 155mm high
CHAMBER CAPACITY	(1x) 30cm Pizza
TEMPERATURE RANGE	50 ~ 350°C

ORDER CODE

POS2102



SINGLE DECK SPECIFICATIONS

MODEL	SmartChef HEP-1ST
ELECTRICITY	2kW, 240V, Single Phase
DIMENSIONS	560 x 570 x 280mm high
WEIGHT	18kg
CHAMBER DIMENSIONS	(1x) 400 x 400 x 155mm high
CHAMBER CAPACITY	(1x) 30cm Pizza
TEMPERATURE RANGE	50 ~ 350°C

ORDER CODE


POS1101



MANUAL TEMPERATURE
AND TIMER CONTROLS



FITTED WITH
NON-SLIP FEET

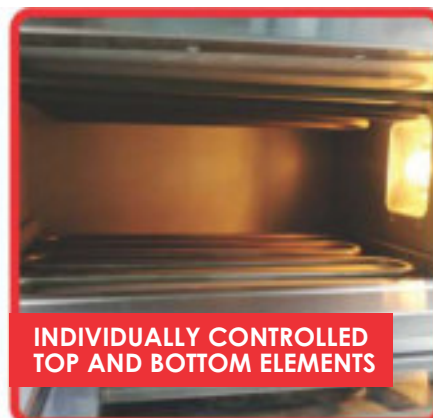

INDIVIDUALLY CONTROLLED
TOP AND BOTTOM ELEMENTS

ELECTRIC PIZZA OVENS TABLE MODEL



FEATURES

- Body manufactured from stainless steel
- Refractory stone cooking surface
- Rockwool insulation
- Sheathed heating elements
- The internal lighting
- Fitted with (4x) non-slip rubber feet

DOUBLE DECK

SPECIFICATIONS

MODEL	Prismafood Basic 2/40 VERTO 4T
ELECTRICITY	2.4kW, 230V, Single Phase
DIMENSIONS	568 x 500 x 430mm
WEIGHT	32kg
CHAMBER DIMENSIONS	(2x) 410 x 360 x 90mm
CHAMBER CAPACITY	(1x) 30cm Pizza
TEMPERATURE RANGE	40 ~ 320°C

ORDER CODE:

POP0240



SINGLE DECK

SPECIFICATIONS

MODEL	Prismafood Basic 1/40 VERTO 2T
ELECTRICITY	1.6kW, 230V, Single Phase
DIMENSIONS	568 x 500 x 280mm
WEIGHT	21kg
CHAMBER DIMENSIONS	(1x) 410 x 360 x 90mm
CHAMBER CAPACITY	(1x) 30cm Pizza
TEMPERATURE RANGE	40 ~ 320°C

ORDER CODE:

POP0140





ELECTRIC DECK OVENS WITH HUMIDIFICATION

 **BakeMark**



INTRODUCING

 **BakeMark**
Smartstone 33

- Electronic control
- Humidification
- Stone base

FEATURES

- Robust body manufactured from stainless steel
- 16 program settings
- Top hinged door with front glass for easy loading and viewing
- Bottom stone on each deck
- Steam function
- Each deck fitted with adjustable vent
- Fitted with (4x) robust casters

TRIPLE DECK

SPECIFICATIONS

MODEL	BakeMark SmartStone XYF-39H-N
ELECTRICITY	25kW, 380V, 3 Phase + N
DIMENSIONS	1750 x 1080 x 1750mm high
WEIGHT	750kg
CHAMBER DIMENSIONS	(3x) 1300 x 750 x 170mm high
CHAMBER CAPACITY	(3x) 600 x 400mm trays
TEMPERATURE RANGE	20 ~ 300°C

ORDER CODE

DOB/S3309



OPTIONAL EXTRAS

BAKING TRAY

600 x 400 x 30mm

BTA0064





FEATURES

- Robust construction
- Bottom hinged doors for easy loading
- Top and bottom elements individually controlled for each deck
- Individually controlled internal lighting per deck
- Fitted with glass viewing windows
- Timer with buzzer individually controlled per deck
- Fitted with (4x) castors

TRIPLE DECK 1600mm

SPECIFICATIONS

MODEL	BakeMark HEO-39
ELECTRICITY	25kW, 380V, 3 Phase + N
DIMENSIONS	1650 x 815 x 1530mm high
WEIGHT	230kg
CHAMBER DIMENSIONS	(3x) 1300 x 620 x 220mm
CHAMBER CAPACITY	(3x) 600 x 400mm trays
TEMPERATURE RANGE	50 ~ 400°C

ORDER CODE

DOB3309



TRIPLE DECK 1200mm

SPECIFICATIONS

MODEL	BakeMark HEO-36
ELECTRICITY	19.5kW, 380V, 3 Phase + N
DIMENSIONS	1220 x 815 x 1530mm high
WEIGHT	165kg
CHAMBER DIMENSIONS	(3x) 860 x 620 x 220mm
CHAMBER CAPACITY	(2x) 600 x 400mm trays
TEMPERATURE RANGE	50 ~ 400°C

ORDER CODE

DOB3206



OPTIONAL EXTRAS

BAKING TRAY

600 x 400 x 30mm

BTA0064



FEATURES

- Robust construction
- Top and bottom elements individually controlled for each deck
- Fitted with the glass viewing window
- HEO-24 & HEO-22 - Fitted with (4x) castors
- Bottom hinged doors for easy loading
- Individually controlled internal lighting per deck
- Timer with buzzer individually controlled per deck
- HEO-11 - Fitted with (4x) non-slip rubber feet

**DOUBLE DECK 1200mm****SPECIFICATIONS**

MODEL	BakeMark HEO-24
ELECTRICITY	13.2kW, 380V, 3 Phase + N
DIMENSIONS	1220 x 815 x 1260mm high
WEIGHT	125kg
CHAMBER DIMENSIONS	(2x) 860 x 620 x 220mm
CHAMBER CAPACITY	(2x) 600 x 400mm tray
TEMPERATURE RANGE	50 ~ 400°C

ORDER CODE**DOB2204****DOUBLE DECK 900mm****SPECIFICATIONS**

MODEL	BakeMark HEO-22
ELECTRICITY	6.4kW, 230V, Single Phase
DIMENSIONS	880 x 580 x 770mm high
WEIGHT	50kg
CHAMBER DIMENSIONS	(2x) 620 x 420 x 160mm
CHAMBER CAPACITY	(1x) 600 x 400mm tray
TEMPERATURE RANGE	50 ~ 300°C

ORDER CODE**DOB2102****SINGLE DECK 900mm****SPECIFICATIONS**

MODEL	BakeMark HEO-11
ELECTRICITY	3.2kW, 230V, Single Phase
DIMENSIONS	880 x 580 x 350mm high
WEIGHT	35kg
CHAMBER DIMENSIONS	(1x) 620 x 420 x 160mm
CHAMBER CAPACITY	(1x) 600 x 400mm tray
TEMPERATURE RANGE	50 ~ 300°C

ORDER CODE**DOB1101****OPTIONAL EXTRAS****BAKING TRAY**

600 x 400 x 30mm

BTA0064

FEATURES

- Body manufactured from 0.8mm, 430 grade stainless steel
- Flame-out protection function
- Gas burner manufactured from SS304 stainless steel
- Fitted with timer to control
- Top hinged door with front glass for easy loading and viewing
- Fitted with heat resisting light
- Aluminum plated chambers for increased thermal radiation
- Ceramic stone bases on each deck
- Double electromagnetic valve control
- Fitted with high quality digital display panels
- Each deck is fitted with a pizza stone base



3 DECK, 9 TRAY WITH HUMIDIFICATION

SPECIFICATIONS

MODEL	BakeMark Smartstone HLY-309E-NM
BTU RATING	70 000
DIMENSIONS	1815 x 925 x 1720mm high
WEIGHT	450kg
CHAMBER DIMENSIONS	(3x) 1320 x 700 x 185mm high
CHAMBER CAPACITY	(3x) 600 x 400mm trays
TEMPERATURE RANGE	20 ~ 400°C

ORDER CODE

DOB/S3309G



2 DECK, 4 TRAY NO HUMIDIFICATION

SPECIFICATIONS

MODEL	BakeMark Smartstone HLY-204E-NM
BTU RATING	35 000
DIMENSIONS	1330 x 850 x 1400mm high
WEIGHT	250kg
CHAMBER DIMENSIONS	(2x) 870 x 670 x 185mm high
CHAMBER CAPACITY	(2x) 600 x 400mm trays
TEMPERATURE RANGE	20 ~ 400°C

ORDER CODE

DOB/S2204G



OPTIONAL EXTRAS

BAKING TRAY

600 x 400 x 30mm

BTA0064

ALUMINUM BAKING TRAYS

SmartChef



600 x 400 x 30mm

MODEL
DIMENSIONS

SmartChef BTA0064
600 x 400 x 30mm deep

ORDER CODE

BTA0064

435 x 315 x 10mm

MODEL
DIMENSIONS

SmartChef BTA0043
435 x 315 x 10mm deep

ORDER CODE

BTA0043

STAINLESS STEEL OVEN GRIDS



600 x 400mm

MODEL
DIMENSIONS

SmartChef OGS0064
600 x 400mm

ORDER CODE

OGS0064

GN 1/1

MODEL
DIMENSIONS

SmartChef OGS0011
530 x 325mm

ORDER CODE

OGS0011

STAINLESS STEEL COOLING RACKS




600 x 400mm

MODEL
DIMENSIONS

SmartChef CTS0064
600 x 400mm

ORDER CODE

CTS0064

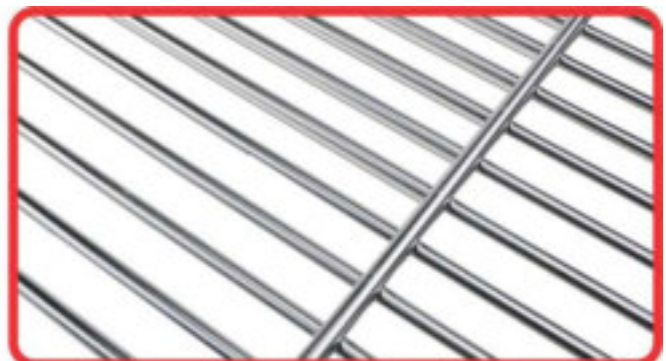



prismafood

▶▶ **solutions**

Because Italians know pizza!



COMPACT
DESIGN

A4

210mm

210mm

Same size as an
A4 page

AVAILABLE IN 3 COLOURS



Goshen[®]
Cool & Compact

SECTION INDEX

Back bar coolers	102
Coffee brewers	92
Coffee urns	93
Frappe makers	95
Gelato machines	98
Hot water urns	93
Ice cream machines	98-101
Ice crushers	95
Juice dispensers	96
Milkshake machines	95
Slush machines	97
Soft serve machines	99-101
Urns	93



FEATURES

- Manufactured from Stainless Steel 304
- Built-in, concealed heating element with "dry-boil" protection
- Fitted with cool-touch handles
- Fitted with a non-drip tap and clear water gauge
- Supplied with a removable drip tray
- Double walled body for improved insulation
- Waterproof on/off switch for improved safety
- Equipped with a "twist-lock" lid to avoid spilling
- Supplied with an internal, stainless steel coffee strainer
- Available in black(matt) and stainless steel



**SUPPLIED
WITH A
STAINLESS STEEL
COFFEE
STRAINER**



14 LITRE

SPECIFICATIONS

MODEL Caterlot 0014
ELECTRICITY 1.5kW, 220V, Single Phase
DIMENSIONS Ø310 x 517mm high
WEIGHT 4kg
CAPACITY 14Lt

Stainless Steel
Matt Black

CBC0014
CBC0014-B



8 LITRE

SPECIFICATIONS

MODEL Caterlot 0008
ELECTRICITY 0.95kW, 220V, Single Phase
DIMENSIONS Ø230 x 504mm high
WEIGHT 3kg
CAPACITY 8Lt

Stainless Steel
Matt Black

CBC0008
CBC0008-B



TWIST-LOCK LID



COOL-TOUCH HANDLES



REMOVABLE DRIP TRAY





FEATURES

- Manufactured from Stainless Steel 304
- Double walled body for improved insulation
- Built-in, concealed heating element with "dry-boil" protection
- Fitted with an adjustable thermostat (30 ~ 110°C), with "keep warm" function
- Waterproof on/off switch for improved safety
- Fitted with cool-touch handles
- Equipped with a "twist-lock" lid to avoid spilling
- Fitted with a non-drip tap and clear water gauge
- Supplied with a removable drip tray
- Available in matt black, matt red, yellow, copper colour and stainless steel



24 LITRE SPECIFICATIONS

MODEL Caterlot 0024
ELECTRICITY 2.5kW, 220V, Single Phase
DIMENSIONS Ø310 x 640mm high
WEIGHT 5kg
CAPACITY 24Lt

Stainless Steel
Copper Colour
Yellow
Matt Black
Matt Red

URN0024
URN0024-O
URN0024-MY
URN0024-B
URN0024-MR



16 LITRE SPECIFICATIONS

MODEL Caterlot 0016
ELECTRICITY 2.5kW, 220V, Single Phase
DIMENSIONS Ø310 x 517mm high
WEIGHT 4kg
CAPACITY 16Lt

Stainless Steel
Copper Colour
Yellow
Matt Black
Matt Red

URN0016
URN0016-O
URN0016-MY
URN0016-B
URN0016-MR



9 LITRE SPECIFICATIONS

MODEL Caterlot 0009
ELECTRICITY 1.5kW, 220V, Single Phase
DIMENSIONS Ø230 x 504mm high
WEIGHT 3kg
CAPACITY 9Lt

Stainless Steel
Copper Colour
Yellow
Matt Black
Matt Red

URN0009
URN0009-O
URN0009-MY
URN0009-B
URN0009-MR



NON-DRIP TAP



WATERPROOF SWITCH



MANUAL THERMOSTAT





FEATURES

- Modern design ABS housing with an unbreakable food grade Polycarbonate jar
- Easy to use digital touch control panel with various speed, time and pulse action
- Polycarbonate soundproof cover to reduce noise
- Fitted with a stainless steel blade assembly
- Removable dosing cup and stir bar included
- Fitted with an over-heat, auto shut-off safety function
- Industrial grade, heavy duty motor with pure copper coil
- Housing fitted with non-slip base

WITH SOUND COVER

SPECIFICATIONS

MODEL	SmartBlend VORTEX SC 1680C
ELECTRICITY	1.68kW, 220V, Single Phase
DIMENSIONS	230 x 250 x 540mm high (closed) 230 x 250 x 790mm high (open)
WEIGHT	9kg
SPEED	32 000rpm - Touch control
JAR CAPACITY	2Lt

ORDER CODE

BSB1680C/C



FEATURES

- ABS housing with unbreakable food grade Polycarbonate jar
- Precision blending with pulse action
- Removable dosing cup and stir bar included
- Industrial grade, heavy duty motor with pure copper coil
- Variable speed control
- Fitted with a stainless steel blade assembly
- Fitted with an over-heat, auto shut-off safety function
- Housing fitted with non-slip base



SPECIFICATIONS

MODEL	SmartBlend VORTEX 1680
ELECTRICITY	1.68kW, 220V, Single Phase
DIMENSIONS	230 x 250 x 520mm high
WEIGHT	6kg
SPEED	32 000rpm - Analog control
JAR CAPACITY	2Lt

ORDER CODE

BSB1680



SPECIFICATIONS

MODEL	SmartBlend STORM 112
ELECTRICITY	1.1kW, 220V, Single Phase
DIMENSIONS	225 x 210 x 490mm high
WEIGHT	4kg
SPEED	26 000rpm - Analog control
JAR CAPACITY	2Lt

ORDER CODE

BSB0112

AVAILABLE EXTRAS

2Lt Jar & Tamper
Compatible with - VORTEX SC 1680C & VORTEX 1680
ORDER CODE **BSB1680-JAR2L**

2Lt Jar & Tamper
Compatible with - STORM 112
ORDER CODE **BSB0112-JAR2L**

MILKSHAKE MACHINE / FRAPPE MAKER



FEATURES

- Manufactured from durable, food-grade ABS material
- Fitted with a two speed on/off switch
- Motor ventilation grooves prevents over heating
- Fitted with a powerful 400W motor with re-activated thermal cut-off for the safety of the appliance and the protection of the motor
- Fitted with non-slip feet
- Supplied with a stainless steel mixer cup. Optional ABS cup available
- Available in 5 colours to compliment any bar or kitchen theme

SPECIFICATIONS

MODEL	Johny AK/2-2T
ELECTRICITY	0.4kW, 220V, Single Phase
DIMENSIONS	170 x 175 x 465mm high
WEIGHT	4.5kg
SPEED	14 000 / 20 000rpm
CONTAINER CAPACITY	1 000ml

GREY
RED
GREEN
BLUE
SILVER

MMJ0001
MMJ0002
MMJ0003
MMJ0004
MMJ0005



AVAILABLE COLOURS

● Dark Red ● Dark Blue ● Dark Green ● Dark Grey ● Silver



1L STAINLESS STEEL CUP

ORDER CODE

MMJ1000



1L POLYCARBONATE CUP

ORDER CODE

MMJ2000

ICE CRUSHER



FEATURES

- Stainless steel body cover
- Front face cover manufactured from ABS
- Transparent feed cover. Manufactured from polycarbonate
- 2Lt transparent ice bucket with water draining grate. Manufactured from polycarbonate
- Isolating double-wall housing prevents immediate melting of ice
- Fitted with a 120W motor with thermal protection
- Fitted with Auto-stop safety micro switches on feed cover and ice bucket
- Fitted with non-slip feet

SPECIFICATIONS

MODEL	Johny AK/14 ECO
ELECTRICITY	0.12kW, 220V, Single Phase
DIMENSIONS	300 x 190 x 400mm high
WEIGHT	7kg
SPEED	40 rpm
CRUSH CAPACITY	40 kg/h
BUCKET CAPACITY	2Lt

ORDER CODE

ICJ0001



FEATURES

- Body manufactured from high quality stainless steel
- Electromagnetic drive shaft
- Supplied with drip trays
- High resistance, non-toxic Polycarbonate tank
- Air cooling
- Fitted with (4x) non-slip feet



3 x 12L Juice Dispenser

SPECIFICATIONS

MODEL	PolarCab LSJ12X3
ELECTRICITY	0.38kW, 220V, Single Phase
DIMENSIONS	610 x 410 x 660mm high
WEIGHT	36kg
CAPACITY	(3x) 12L
TEMPERATURE RANGE	7 ~ 12 °C
REFRIGERANT GAS	R134a

ORDER CODE

JDP0312



2 x 12L Juice Dispenser

SPECIFICATIONS

MODEL	PolarCab LSJ12X2
ELECTRICITY	0.28kW, 220V, Single Phase
DIMENSIONS	410 x 410 x 660mm high
WEIGHT	27kg
CAPACITY	(2x) 12L
TEMPERATURE RANGE	7 ~ 12 °C
REFRIGERANT GAS	R134a

ORDER CODE

JDP0212



FEATURES

- R304, Stainless steel Body panel, louver panel for ventilation
- Durable, high density PC tanks with brandable lids
- Imported European brand compressor, durable, energy saving, low noise
- Dual beater mixing system (inner and outer cooling cylinder) to avoid "ice jam"
- Electromagnetic drive shaft
 - Fitted with an all red copper condenser
 - Fitted with (4x) non-slip feet
- Includes drip trays



3 x 10L SLUSH MACHINE

SPECIFICATIONS

MODEL	PolarCab XRJ10LX3
ELECTRICITY	0.8kW, 220V, Single Phase
DIMENSIONS	610 x 510 x 770mm high
WEIGHT	63kg
VOLUME	(3x) 10L
TEMPERATURE RANGE	-2 ~ -3°C
REFRIGERANT GAS	R134a

ORDER CODE

SMP0310



2 x 10L SLUSH MACHINE

SPECIFICATIONS

MODEL	PolarCab XRJ10LX2
ELECTRICITY	0.6kW, 220V, Single Phase
DIMENSIONS	430 x 510 x 770mm high
WEIGHT	41kg
VOLUME	(2x) 10L
TEMPERATURE RANGE	-2 ~ -3°C
REFRIGERANT GAS	R134a

ORDER CODE

SMP0210



1 x 10L SLUSH MACHINE

SPECIFICATIONS

MODEL	PolarCab XRJ10LX1
ELECTRICITY	0.6kW, 220V, Single Phase
DIMENSIONS	220 x 510 x 770mm high
WEIGHT	28kg
VOLUME	10L
TEMPERATURE RANGE	-2 ~ -3°C
REFRIGERANT GAS	R134a

ORDER CODE

SMP0110



GELATO MACHINES COUNTER TOP



FEATURES

- Body manufactured from stainless steel
- Compact design uses less workspace
- Transparent polycarbonate feeder hopper located in the front of the machine for easy and accurate operation
- Large stainless steel freezing cylinder increases output and "fluffiness" of the ice cream
- Retractable, rotating mixer blade inside the cylinder further improves the smoothness of the ice cream
- Fitted with a powerful, energy saving compressor
- Fitted with a digital, waterproof control panel
- Fitted with (4x) non-slip feet

SPECIFICATIONS

MODEL	Goshen BQ12T
ELECTRICITY	1kW, 220V, Single Phase
DIMENSIONS	500 x 705 x 800mm high
WEIGHT	100kg
HOPPER VOLUME	5.1Lt
REFRIGERANT GAS	R404a
HOURLY OUTPUT	10 ~ 14Lt/hour

ORDER CODE

ICM/BQ12T




OPTIONAL EXTRAS

ICE CREAM INSERT - 360 x 165 x 120mm deep
ORDER CODE GNI8120



TRANSPARENT HOPPER

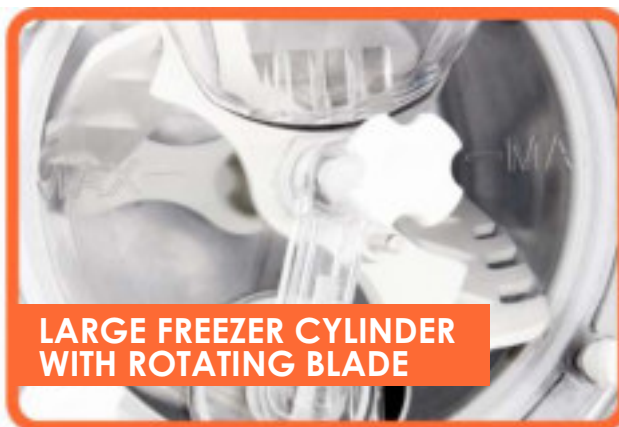

**LARGE FREEZER CYLINDER
WITH ROTATING BLADE**



**WATERPROOF
DIGITAL CONTROL PANEL**



SOFT SERVE MACHINES COUNTER TOP



FEATURES

- Exquisite modern design. Small and portable
- Silent operation
- Fitted with a stainless steel refrigerated hopper
- Mixer installed inside hopper makes for smoother ice cream
- Fitted with a stainless steel beater
- Built-in air pump
- Fitted with a 7inch, touch screen control panel
- One-touch thaw function
- Fitted with (4x) non-slip feet



COOL & COMPACT

SPECIFICATIONS

MODEL	Goshen ST16RELW
ELECTRICITY	1.25kW, 220V, Single Phase
DIMENSIONS	210 x 554 x 740mm high
WEIGHT	45kg
HOPPER VOLUME	6Lt
REFRIGERANT GAS	R290
HOURLY OUTPUT	16 ~ 18Lt/hour
REALISTIC OUTPUT	12Lt (100 x 120g servings)

ORDER CODE SSM/ST16RELW-W

FEATURES

- Exquisite modern design. Small and portable
- Silent operation
- Fitted with a stainless steel hopper
- Fitted with a food grade plastic beater
- Built-in air pump
- Fitted with a 5inch, waterproof, touch control panel
- Built-in thaw function
- Fitted with (4x) non-slip feet
- Available in 3 exciting candy colours



COMPACT

SPECIFICATIONS

MODEL	Goshen ST16E
ELECTRICITY	1.15kW, 220V, Single Phase
DIMENSIONS	210 x 554 x 740mm high
WEIGHT	43kg
HOPPER VOLUME	6Lt
REFRIGERANT GAS	R290
HOURLY OUTPUT	16 ~ 18Lt/hour
REALISTIC OUTPUT	12Lt (100 x 120g servings)

ORDER CODE SSM/ST16E-W ☐ WHITE
SSM/ST16E-P ☐ PINK
SSM/ST16E-Y ☐ YELLOW



SOFT SERVE MACHINES WITH REFRIGERATED HOPPER



FEATURES

- Compact design - can be installed in small areas
- Unique mixing shaft manufactured with stainless steel axes with non-toxic corkscrew plastic scrapers
- Fitted with 2 stainless steel refrigerated hoppers with clear plastic lids for easy viewing
- Quick recovery time
- Low noise and vibrations
- Gravity feed machine
- Easy to disassemble and clean
- Fitted with removable plastic drip tray
- IT Push panel (one touch switch) controller with indicator light for easy operation



FLOOR STANDING

SPECIFICATIONS

MODEL	PolarCab SQL-922
ELECTRICITY	2kW, 230V, Single Phase
DIMENSIONS	550 x 700 x 1330mm high
WEIGHT	140kg
REFRIGERANT GAS	R22
HOPPER CAPACITY	(2x) 5.8Lt
OUTPUT PER HOUR	180 cones

ORDER CODE

SSM1002



TABLE MODEL

SPECIFICATIONS

MODEL	PolarCab SQL-922C
ELECTRICITY	2kW, 230V, Single Phase
DIMENSIONS	550 x 700 x 1080mm high
WEIGHT	115kg
REFRIGERANT GAS	R22
HOPPER CAPACITY	(2x) 5.8Lt
OUTPUT PER HOUR	180 cones

ORDER CODE

SSM1001



SOFT SERVE MACHINES WITH DOUBLE BARREL

SmartChef



FEATURES

- Easy to operate touch control panel
- Fitted with (2x) stainless steel hoppers
- Quick recovery time
- Low noise and vibration
- Gravity feed machine
- Easy to disassemble and clean
- Fitted with removable plastic drip tray for easy cleaning
- Fitted with (4x) castors

FLOOR STANDING

SPECIFICATIONS

MODEL	SmartChef HIM-02
ELECTRICITY	1.7kW, 230V, Single Phase
DIMENSIONS	700 x 900 x 1435mm high
WEIGHT	135kg
REFRIGERANT GAS	R22/R404A
HOPPER CAPACITY	(2x) 6.5L†
OUTPUT PER HOUR	90 cones

ORDER CODE

SSM-HIM-02



FEATURES

- Black units - Outer cabinet manufactured from coated mild steel
- Stainless steel units - Outer cabinet manufactured stainless steel
- High pressure injected 40mm cyclopentane insulation
- Cabinet interior manufactured from compressed aluminium
- 14W square fan assisted condenser
- Automatic defrost function
- Doors are fitted with tempered glass
- Fitted with adjustable feet for easy leveling
- Fitted with a digital temperature control and display
- Smooth action sliding doors / hinged doors
- Standard with internal LED lights and locks



3 DOOR

SPECIFICATIONS

MODEL	PolarCab LG320
ELECTRICITY	0.67kW, 220V, Single Phase
EXTERNAL DIMENSIONS	1350 x 520 x 850mm high
WEIGHT	80kg
INTERNAL DIMENSIONS	1260 x 385 x 700mm high
VOLUME	320Lt
TEMPERATURE RANGE	2 ~ 10°C
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(6x) 400 x 345mm

SLIDING DOORS - BLACK
HINGED DOORS - BLACK
HINGED DOORS - S/STEEL

BBP0003
BBP1003
BBP3003



2 DOOR

SPECIFICATIONS

MODEL	PolarCab LG198
ELECTRICITY	0.23kW, 220V, Single Phase
EXTERNAL DIMENSIONS	900 x 520 x 850mm high
WEIGHT	62kg
INTERNAL DIMENSIONS	820 x 385 x 700mm high
VOLUME	198Lt
TEMPERATURE RANGE	2 ~ 10°C
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(4x) 400 x 345mm

SLIDING DOORS - BLACK
HINGED DOORS - BLACK
HINGED DOORS - S/STEEL

BBP0002
BBP1002
BBP3002



SINGLE DOOR

SPECIFICATIONS

MODEL	PolarCab LG128
ELECTRICITY	0.18kW, 220V, Single Phase
EXTERNAL DIMENSIONS	600 x 520 x 850mm high
WEIGHT	46kg
INTERNAL DIMENSIONS	520 x 385 x 700mm high
VOLUME	128Lt
TEMPERATURE RANGE	2 ~ 10°C
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(2x) 500 x 345mm

HINGED DOOR - BLACK
HINGED DOOR - S/STEEL

BBP1001
BBP3001



DIGITAL TEMPERATURE CONTROL AND DISPLAY



**DRINK
MIXER**



ICE CRUSHER



PRE-RINSE UNITS

RELIABILITY BUILT IN

CONSERVE UP TO

60%

WATER



WASHING & HARDWARE

SECTION INDEX

<i>Dishwashers</i>	
• Conveyor	112
• Front loading	107, 109
• Hoodtype	108, 110-111
Faucets	113
Glass washers	106
Hand wash basins	114
Hose reels	114
Janitor trolleys	115
Knee operated hand wash basins	114
Laundry trolleys	115
Overhead sprays	113
Pre-rinse sprays	113



FEATURES

- The machine body is manufactured from AISI 304 18/10 stainless steel
- The powerful 1HP wash pump, designed and manufactured by Omniwash, ensures maximum performance wash after wash
- The rinse boiler is fitted with internal baffles to provide consistent clean rinse water and prevents the rinse temperature from dropping off too quickly
- High performance wash arms and jets are designed to work together with the Omniwash wash pump to deliver maximum washing action
- The powerful jets can cut through baked-on food soils
- Fitted with easy-to-use illustrated push buttons
- The wash and rinse arms are easy to remove and clean
- Wash tank filters keeps the machine free of excess food soils resulting in cleaner water for longer



SINGLE PHASE GRAVITY DRAIN

SPECIFICATIONS

MODEL	Omniwash Jolly 40
ELECTRICITY	3.15kW, 220V, Single Phase
DIMENSIONS	475 x 505 x 720mm high
WEIGHT	40kg
PC BOARDS	No - Electro Mechanical
MAX GLASS HEIGHT	290mm high
CYCLE TIME	120 seconds
CYCLES PER HOUR	30
HOURLY OUTPUT	Up to 1200 glasses
DRAIN PUMP	No - Gravity Drain
BASKET DIMENSIONS	400 x 400 x 100mm high
BASKETS SUPPLIED	1 x Open Bowl Dish Rack 1 x Cutlery Holder
BOILER CAPACITY	5.5Lt
WASH TANK CAPACITY	14Lt
WASH TANK TEMP	55°C
RINSE TEMP	80 ~ 85°C

ORDER CODE

GWO0040



*** WASTE POINT, NOT HIGHER THAN 100mm ABOVE FLOOR LEVEL IS REQUIRED FOR ALL GRAVITY DRAIN MODELS**

OPTIONAL STAND

STAINLESS STEEL WITH BASKET RUNNERS - 600mm high

SDO0040



FEATURES

- The machine body is manufactured from AISI 304 18/10 stainless steel
- The powerful 1HP wash pump, designed and manufactured by Omniwash, ensures maximum performance wash after wash
- The rinse boiler is fitted with internal baffles to provide consistent clean rinse water and prevents the rinse temperature from dropping off too quickly
- High performance wash arms and jets are designed to work together with the Omniwash wash pump to deliver maximum washing action
- The powerful jets can cut through baked-on food soils
- Fitted with easy-to-use illustrated push buttons
- The wash and rinse arms are easy to remove and clean
- Wash tank filters keeps the machine free of excess food soils resulting in cleaner water for longer



SINGLE PHASE WITH DRAIN PUMP

SPECIFICATIONS

MODEL	Omniwash Jolly 50 DP
ELECTRICITY	3.75kW, 220V, Single Phase
DIMENSIONS	590 x 600 x 815mm high
WEIGHT	59kg
PC BOARDS	No - Electro Mechanical
MAX GLASS HEIGHT	320mm high
CYCLE TIME	120 seconds
CYCLES PER HOUR	30
HOURLY OUTPUT	Up to 1500 glasses Up to 540 dishes
DRAIN PUMP	Yes - Manual Hold Button
BASKET DIMENSIONS	500 x 500 x 100mm high
BASKETS SUPPLIED	1 x All Purpose / Dish Rack 1 x Open Bowl Dish Rack 1 x Cutlery Holder
BOILER CAPACITY	6Lt
WASH TANK CAPACITY	29Lt
WASH TANK TEMP	55°C
RINSE TEMP	80 ~ 85°C

ORDER CODE

DWO6050



SINGLE PHASE GRAVITY DRAIN

SPECIFICATIONS

MODEL	Omniwash Jolly 5000 ST
ELECTRICITY	3.75kW, 220V, Single Phase
DIMENSIONS	590 x 600 x 815mm high
WEIGHT	59kg
PC BOARDS	Yes
MAX GLASS HEIGHT	320mm high
CYCLE TIME	120 seconds
CYCLES PER HOUR	30
HOURLY OUTPUT	Up to 1500 glasses Up to 540 dishes
DRAIN PUMP	No - Gravity Drain
BASKET DIMENSIONS	500 x 500 x 100mm high
BASKETS SUPPLIED	1 x All Purpose / Dish Rack 1 x Open Bowl Dish Rack 1 x Cutlery Holder
BOILER CAPACITY	6Lt
WASH TANK CAPACITY	29Lt
WASH TANK TEMP	55°C
RINSE TEMP	85°C

ORDER CODE

DWO0050



3 PHASE GRAVITY DRAIN

SPECIFICATIONS

MODEL	Omniwash Jolly 50 T
ELECTRICITY	6.75kW, 380V, 3 Phase + N
DIMENSIONS	590 x 600 x 815mm high
WEIGHT	59kg
PC BOARDS	No - Electro Mechanical
MAX GLASS HEIGHT	320mm high
CYCLE TIME	120 seconds
CYCLES PER HOUR	30
HOURLY OUTPUT	Up to 1500 glasses Up to 540 dishes
DRAIN PUMP	No - Gravity Drain
BASKET DIMENSIONS	500 x 500 x 100mm high
BASKETS SUPPLIED	1 x All Purpose / Dish Rack 1 x Open Bowl Dish Rack 1 x Cutlery Holder
BOILER CAPACITY	6Lt
WASH TANK CAPACITY	29Lt
WASH TANK TEMP	55°C
RINSE TEMP	85°C

ORDER CODE

DWO8050



* WASTE POINT, NOT HIGHER THAN 100mm ABOVE FLOOR LEVEL IS REQUIRED FOR ALL GRAVITY DRAIN MODELS

OPTIONAL STAND

STAINLESS STEEL WITH BASKET RUNNERS - 600mm high

SDO0050



FEATURES

- The machine body is manufactured from AISI 304 18/10 stainless steel
- The powerful 1HP wash pump, designed and manufactured by Omniwash, ensures maximum performance wash after wash
- The rinse boiler is fitted with internal baffles to provide consistent clean rinse water and prevents the rinse temperature from dropping off too quickly
- High performance wash arms and jets are designed to work together with the Omniwash wash pump to deliver maximum washing action
- The powerful jets can cut through baked on food soils
- Fitted with easy-to-use illustrated push buttons
- The wash and rinse arms are easy to remove and clean
- Wash tank filters keeps the machine free of excess food soils resulting in cleaner water for longer
- Automatic start by closing of the hood
- Electro mechanical design - no PC board
- Fitted with 4 device levelling legs with plastic feet

SPECIFICATIONS


MODEL	Omniwash Jolly 6 1P
ELECTRICITY	9.7kW, 380V, 3 Phase + N
DIMENSIONS	635 x 700 x 1460mm high 635 x 700 x 1950mm high (open)
WEIGHT	151kg
PC BOARDS	No - Electro Mechanical
MAX GLASS HEIGHT	430mm high
CYCLE TIME	90 ~ 180 seconds
CYCLES PER HOUR	20 ~ 40
HOURLY OUTPUT	Up to 2000 glasses Up to 700 dishes
DRAIN PUMP	No
BASKET DIMENSIONS	500 x 500 x 100mm high
BASKETS SUPPLIED	(2x) All Purpose / Plate Dish Rack (1x) Open Bowl Dish Rack (1x) Cutlery Holder
BOILER CAPACITY	9Lt
WASH TANK CAPACITY	55Lt
WASH TANK TEMP	55°C
RINSE TEMP	80 ~ 85°C

ORDER CODE

DWO1009



* WASTE POINT, NOT HIGHER THAN 100mm ABOVE FLOOR LEVEL IS REQUIRED FOR ALL GRAVITY DRAIN MODELS

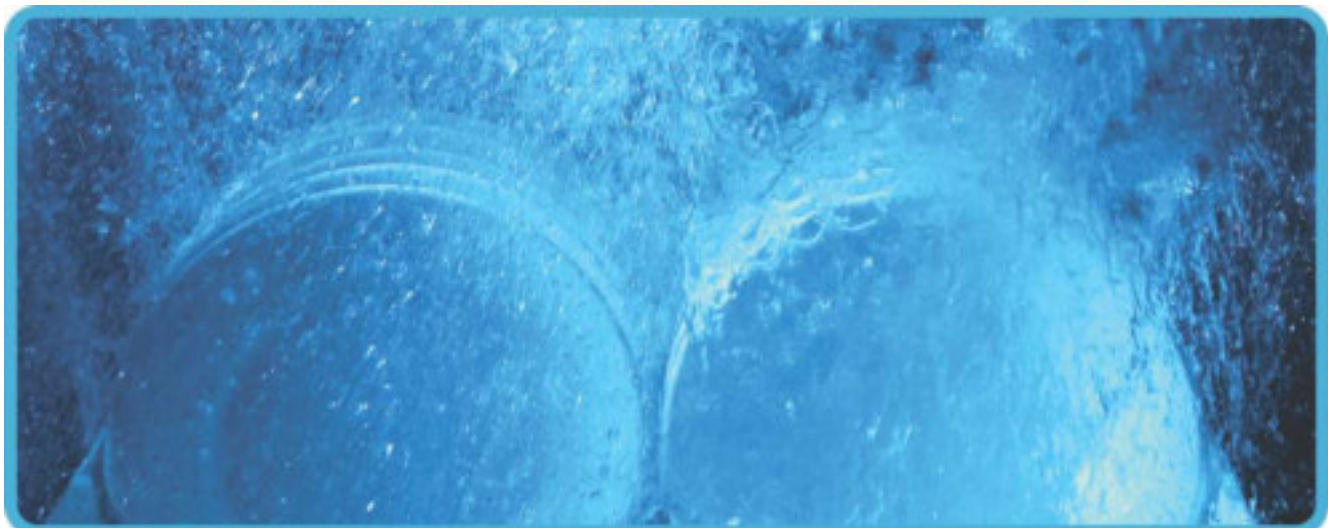



FEATURES

- AISI 304 Stainless steel body
- Ergonomic design
- Easy to use electro mechanical control panel
- 4.5 kW boiler resistance provides the fixed 82.5 °C water temperature level for the best washing results
- Specially designed wash and rinse spraying arm provides the best washing results
- Adjustable wash programs. 60, 90, 120 or 180 seconds
- Specially designed rubber water transfer system, prevents pressure loss and provides more effective washing



SINGLE PHASE WITH DRAIN & DETERGENT PUMPS
SPECIFICATIONS

MODEL	Crystal CRW500 TPD
ELECTRICITY	5.2kW, 220V, Single Phase
DIMENSIONS	590 x 610 x 830mm high
WEIGHT	60kg
PC BOARDS	No - Electro Mechanical
MAX GLASS HEIGHT	320mm high
CYCLE TIME	60 ~ 180 seconds
CYCLES PER HOUR	20 ~ 60
HOURLY OUTPUT	Up to 1500 glasses Up to 540 dishes
DRAIN PUMP	Yes
RINSE & CHEM PUMP	Yes
BASKET DIMENSIONS	500 x 500 x 100mm high
BASKETS SUPPLIED	1 x All Purpose / Dish Rack 1 x Open Bowl Dish Rack 1 x Cutlery Holder
BOILER CAPACITY	6Lt
WASH TANK CAPACITY	14Lt
WASH TANK TEMP	55°C
RINSE TEMP	80 ~ 85°C

ORDER CODE CRY-CRW500.TPD

SINGLE PHASE WITH DRAIN PUMP
SPECIFICATIONS

MODEL	Crystal CRW500 T
ELECTRICITY	5.2kW, 220V, Single Phase
DIMENSIONS	590 x 610 x 830mm high
WEIGHT	60kg
PC BOARDS	No - Electro Mechanical
MAX GLASS HEIGHT	320mm high
CYCLE TIME	60 ~ 180 seconds
CYCLES PER HOUR	20 ~ 60
HOURLY OUTPUT	Up to 1500 glasses Up to 540 dishes
DRAIN PUMP	Yes
RINSE & CHEM PUMP	No
BASKET DIMENSIONS	500 x 500 x 100mm high
BASKETS SUPPLIED	1 x All Purpose / Dish Rack 1 x Open Bowl Dish Rack 1 x Cutlery Holder
BOILER CAPACITY	6Lt
WASH TANK CAPACITY	14Lt
WASH TANK TEMP	55°C
RINSE TEMP	80 ~ 85°C

ORDER CODE CRY-CRW500.T

OPTIONAL STAND

STAINLESS STEEL WITH BASKET RUNNERS - 600mm high

SDO0050





FEATURES

- AISI 304 Stainless steel body with esthetic finish
- Ergonomic design with rounded corners
- Easy to use electro mechanical control panel
- Specially designed hood spring system
- 9.7kW boiler resistance provides the fixed 82.5°C water temperature level for the best washing results
- Specially designed wash and rinse spraying arm provides the best washing results
- 2 cycles - 90 or 180 seconds
- Specially designed rubber water transfer system, prevents pressure loss and provides more effective washing

SPECIFICATIONS

ELECTRICITY	9.7kW, 380V, 3 Phase + N
DIMENSIONS	610 x 730 x 1460mm high 610 x 730 x 1950mm high (open)
WEIGHT	95kg
MAX GLASS HEIGHT	380mm high
CYCLE TIME	90 ~ 180 seconds
CYCLES PER HOUR	20 ~ 40
HOURLY OUTPUT	Up to 2000 glasses Up to 700 dishes
BASKET DIMENSIONS	500 x 500 x 100mm high
BASKETS SUPPLIED	(1x) All Purpose / Plate Dish Rack (1x) Open Bowl Dish Rack
BOILER CAPACITY	7Lt
WASH TANK CAPACITY	45Lt
WASH TANK TEMP	55°C
RINSE TEMP	80 ~ 85°C

GRAVITY DRAIN

MODEL	Crystal CRW1000
DRAIN PUMP	No
RINSE & CHEM PUMP	No
ORDER CODE	CRY-CRW1000

DRAIN PUMP

MODEL	Crystal CRW1000 T
DRAIN PUMP	Yes
RINSE & CHEM PUMP	No
ORDER CODE	CRY-CRW1000.T

DETERGENT PUMPS

MODEL	Crystal CRW1000 PD
DRAIN PUMP	No
RINSE & CHEM PUMP	Yes
ORDER CODE	CRY-CRW1000.PD

DRAIN & DETERGENT PUMPS

MODEL	Crystal CRW1000 TPD
DRAIN PUMP	Yes
RINSE & CHEM PUMP	Yes
ORDER CODE	CRY-CRW1000.TPD



* WASTE POINT, NOT HIGHER THAN 100mm ABOVE FLOOR LEVEL IS REQUIRED FOR ALL GRAVITY DRAIN MODELS



FEATURES

- AISI 304 stainless steel body and digital control panel
- Instant display of tank and boiler water temperatures
- 5 different washing programs, adjustable to 60-90-120-180-240 seconds
- 1 dishwashing basket consumes 3 liters of water
- EPDM rubber hose substance conforming to Food Codex standards
- Effective washing results with a specially designed washing and rinsing arms structure
- Thanks to a specially-designed card technology, the rinsing process does not start before the boiler water temperature reaches 85°C. This guarantees hygienic rinsing according to HACCP standards
- Automatic pause and resume feature when opening or closing the door
- 9 kW boiler heating element, 4,5 kW tank heating element
- Front cover allows easy technical service without moving / dragging the product around

DIGITAL CONTROL

SPECIFICATIONS


MODEL	Crystal CRWD1000
ELECTRICITY	9.7kW, 380V, 3 Phase + N
DIMENSIONS	610 x 730 x 1460mm high 610 x 730 x 1950mm high (open)
WEIGHT	95kg
MAX GLASS HEIGHT	380mm high
CYCLE TIME	60 ~ 240 seconds
CYCLES PER HOUR	15 ~ 60
HOURLY OUTPUT	Up to 2000 glasses Up to 1000 dishes
BASKET DIMENSIONS	500 x 500mm
BASKETS SUPPLIED	(1x) All Purpose / Plate Dish Rack (1x) Open Bowl Dish Rack
BOILER CAPACITY	7Lt
WASH TANK CAPACITY	45Lt
WASH TANK TEMP	55°C
RINSE TEMP	80 ~ 85°C

ORDER CODE

CRY-CRWD1000

* WASTE POINT, NOT HIGHER THAN 100mm ABOVE FLOOR LEVEL IS REQUIRED FOR ALL GRAVITY DRAIN MODELS



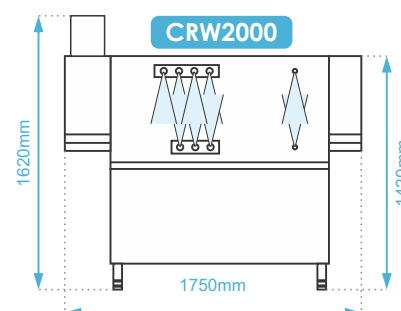

FEATURES

- AISI 304 stainless steel body
- Easy to remove and install, wide-angle spray stainless steel wash and rinse arms that dispense the water evenly to cover all your dishes and cutlery, ensuring a thorough clean
- AISI 304 stainless steel drying fan and module, making it possible to quickly reuse the dishes
- Thanks to an easy-to-use control panel, all functions are controlled by just two buttons
- Safety system prevents the door from collapsing and allows safe operation during washing
- PE1000 plastic parts (used on the door and conveyor mechanisms) are resistant to abrasion, prevent bacteria accumulation and conform to Food Codex standards
- Heat-resistant, double-deck curtains produced by a seamless joining method to comply with hygiene standards, prevent heat and water loss and can be easily cleaned and removed
- Non-return valve system
- Pressure reducer protects the dosing pumps against high water pressure and can be adjusted to the desired pressure
- Dosing pump electrical connection panel is designed for all brands and models
- Energy saving provided by heat insulation in boilers and washing tank
- Design that allows easy technical service without moving / dragging the product around
- Door safety sensor
- Inlet and rinse sensors save energy, water and chemical consumption
- Conveyor anti-jam safety system
- Limit switch fitted to end of outlet table
- Machine height can be adjusted with stainless steel feet

SPECIFICATIONS

ELECTRICITY	40.5kW, 380V, 3 Phase + N
DIMENSIONS	1750 x 780 x 1620mm high
WEIGHT	270kg
CYCLES PER HOUR	110
HOURLY OUTPUT	Up to 2000 dishes
BASKET DIMENSIONS	500 x 500mm
BOILER CAPACITY	23Lt
WASH TANK CAPACITY	100Lt
WASH TANK TEMP	55 ~ 60°C
RINSE TEMP	82 ~ 85°C



LEFT TO RIGHT

MODEL	Crystal CRW2000-R
ORDER CODE	CRY-CRW2000L-R

RIGHT TO LEFT

MODEL	Crystal CRW2000-L
ORDER CODE	CRY-CRW2000R-L



Conveyor units with dryer and pre-wash modules available on request

PRE-RINSE SPRAYS



DECK MOUNTED

FEATURES

- Single hole deck mount mixing faucet
- 13mm BSPP in-line check valves
- Quarter-turn ceramic cartridges with lever handles and colour coded screws
- Supplied with (2x) 455mm flexible hoses
- 1.1m flex hose with overhead spring
- 5 SV 1.15 GPM spray valve
- Includes 152mm wall bracket

MODEL
ORDER CODE

T&S 5PR-2S00
PRS/5PR-2S00

WALL MOUNTED

FEATURES

- 203mm wall mount mixing faucet
- In-line check valves
- 13mm NPT female inlets
- Quarter-turn ceramic cartridges with lever handles and colour coded screws
- 1.1m flex hose with overhead spring
- 5 SV 1.15 GPM spray valve
- Includes 152mm wall bracket

MODEL
ORDER CODE

T&S 5PR-8W00
PRS/5PR-8W00



OPTIONAL SWIVEL ARM FAUCET

MODEL
ORDER CODE

T&S 5AFL12
PRS/5AFL12

KITCHEN FAUCETS



FEATURES

- Wall mount faucet
- Distance between inlets: 150mm / 6"
- Quarter-turn ceramic cartridges with lever handles and colour coded screws
- 13mm NPT female inlets

MODEL
ORDER CODE

T&S 5F-6WLX12
WMF/5F-6WLX12

FEATURES

- Open hose reel (Stainless steel or epoxy coated)
- 3/8" heavy-duty non-marking hose rated to 300psi
- 3/8" NPT female inlet
- Multi-fit bracket for wall, ceiling or under counter mounting
- Stainless steel front trigger watergun with swivel action
- Ratcheting system with activated retraction
- Adjustable hose bumper / stopper



10 METER - STAINLESS STEEL REEL

SPECIFICATIONS

MODEL	T&S Brass B-7132-05
HOSE LENGTH	10m
HOSE DIAMETER	9.5mm
WEIGHT	18kg
MAX PRESSURE	125psi
TEMPERATURE RANGE	4 ~ 90°C

ORDER CODE HRT/B-7132-05



10 METER - EPOXY COATED REEL

SPECIFICATIONS

MODEL	T&S Brass B-7232-05
HOSE LENGTH	10m
HOSE DIAMETER	9.5mm
WEIGHT	18kg
MAX PRESSURE	125psi
TEMPERATURE RANGE	4 ~ 90°C

ORDER CODE HRT/B-7232-05



KNEE OPERATED HAND WASH BASIN

SmartChef



FEATURES

- Manufactured from AISI 304 stainless steel
- High splash-back with deep-drawn tank
- Hot and cold water supply
- Adjustable single lever mixertap with non-return valve
- Fitted with a "swan-neck" faucet
- Smooth rounded corners for increased esthetics

SPECIFICATIONS

MODEL	SmartChef WT-C400401
DIMENSIONS	400 x 330 x 570mm high
WEIGHT	7kg

ORDER CODE HWS0001

LAUNDRY TROLLEY

FEATURES

- Frame manufactured from 25mm stainless steel tubing
- High quality canvas bag included
- (10x) Metal clasp hooks to secure canvas bag to frame
- Easy to assemble (*Supplied flatpacked*)
- Fitted with (4x) castors (2x) lockable



SPECIFICATIONS

MODEL	SmartChef 130201
DIMENSIONS	910 x 560 x 920mm high
BAG DIMENSIONS	850 x 550 x 600mm high
WEIGHT	8kg
LOADING CAPACITY	150kg

ORDER CODE LDT0001



HIGH QUALITY CANVAS BAG

JANITOR TROLLEY

FEATURES

- Manufactured from polypropylene plastic
- Supplied with (1x) 60Lt PVC bag
- 3 Sturdy shelves plus built-in mop, broom holders and hooks to keep things organized
- Spacious front platform is large enough to hold an additional trash can or mop bucket and wringer
- Easy to assemble (*Supplied flatpacked*)
- Fitted with (2x) 80mm front wheels and (2x) 200mm rear wheels



SPECIFICATIONS

MODEL	SmartChef 600503
DIMENSIONS	1250 x 510 x 950mm high
WEIGHT	12kg

ORDER CODE JTP0001



CONVENIENCE



inoxserv

LUXERIOUS BUFFET WARE

CHAFING DISHES • SOUP STATIONS • CEREAL DISPENCERS • JUICE DISPENCERS • URNS

BUFFET WARE

SECTION INDEX

Cereal dispensers	125
Chafing dish heat elements	119
Chafing dish stands	118-119
<i>Chafing dishes</i>	
• Econo series	121
• Induction series	118-119
• PC cover series	122
• Window series	121
Deluxe coffee urns	127
Heat elements for chafing dishes	119
Hot water urns	127
Induction chafing dishes	118-119
Induction warmers	120
Inserts	123
Juice dispensers	126
Soup kettles	121, 124
Soup warmers	119
Urns	127



CHAFING DISHES INDUCTION SERIES

inoxserv

REMOVABLE LID WITH TRANSPARENT GLASS

- It provides a clear view of food, even when closed
- It is easy to open and it engages at various opening angles
- It is easy to remove for cleaning and storage
- The lid movement is controlled by a long-life damping hinge
- It provides a water internal recycle system around the lid edge

HEAT SOURCES

- **Induction cooker** - Table top - Counter sunk - In stand
- **Electric heater** - In stand
- **Solid alcohol** - In stand

CAPSULATED BOTTOM

- Provides even heat distribution
- Minimises heat loss improving energy efficiency



REMOVABLE LID



INDUCTION HEATING



CAPSULATED BOTTOM



*SHOWN WITH OPTIONAL STAND

CHAFING DISH WITH HYDRAULIC GLASS LID RECTANGULAR

SPECIFICATIONS

MODEL	Inoxserv Induction Series S60593
DIMENSIONS	580 x 440 x 330mm high
CAPACITY	8.5Lt
HEAT SOURCE	Induction cooker Heating element Chafing fuel
SUPPLIED WITH	(1x) 1/1 GN pan - 65mm deep Serving spoon holder
ORDER CODE	BEI-S60593

*STAND AND HEAT SOURCE NOT INCLUDED



*SHOWN WITH OPTIONAL STAND

CHAFING DISH WITH HYDRAULIC GLASS LID SQUARE

SPECIFICATIONS

MODEL	Inoxserv Induction Series S60293
DIMENSIONS	400 x 440 x 320mm high
CAPACITY	4.8Lt
HEAT SOURCE	Induction cooker Heating element Chafing fuel
SUPPLIED WITH	(1x) 2/3 GN pan - 65mm deep Serving spoon holder
ORDER CODE	BEI-S60293

*STAND AND HEAT SOURCE NOT INCLUDED



STAND FOR CHAFING DISH - RECTANGULAR

SPECIFICATIONS

MODEL	Inoxserv Induction Series S60590
DIMENSIONS	565 x 330 x 155mm high
HEAT SOURCE	Induction cooker > ISC-BT-70T Heating element > BEI-S305T Chafing fuel
SUPPLIED WITH	(2x) Chafing fuel holders

ORDER CODE BEI-S60590

*HEAT SOURCE NOT INCLUDED



STAND FOR CHAFING DISH - SQUARE

SPECIFICATIONS

MODEL	Inoxserv Induction Series S60290
DIMENSIONS	385 x 385 x 155mm high
HEAT SOURCE	Induction cooker > ISC-BT-70T Heating element > BEI-S305T Chafing fuel
SUPPLIED WITH	(1x) Chafing fuel holders

ORDER CODE BEI-S60290

*HEAT SOURCE NOT INCLUDED



CHAFING DISHES INDUCTION SERIES



*SHOWN WITH OPTIONAL STAND

CHAFING DISH WITH HYDRAULIC GLASS LID ROUND

SPECIFICATIONS

MODEL	Inoxserv Induction Series S50293
DIMENSIONS	440 x 480 x 320mm high
CAPACITY	5Lt
HEAT SOURCE	Induction cooker Heating element Chafing fuel
SUPPLIED WITH	(1x) Round pan - 65mm deep Serving spoon holder
ORDER CODE	BEI-S50293

*STAND AND HEAT SOURCE NOT INCLUDED



STAND FOR CHAFING DISH - ROUND

SPECIFICATIONS

MODEL	Inoxserv Induction Series S50280
DIMENSIONS	300 x 300 x 155mm high
HEAT SOURCE	Induction cooker > ISC-BT-70T Heating element > BEI-S205T Chafing fuel
SUPPLIED WITH	(1x) Chafing fuel holders

ORDER CODE BEI-S50280

*HEAT SOURCE NOT INCLUDED



*SHOWN WITH OPTIONAL STAND

SOUP STATION WITH HYDRAULIC GLASS LID

SPECIFICATIONS

MODEL	Inoxserv Induction Series S50288
DIMENSIONS	410 x 490 x 410mm high
CAPACITY	10Lt
HEAT SOURCE	Induction cooker Heating element Chafing fuel
SUPPLIED WITH	(1x) Round pan - 210mm deep Serving spoon holder
ORDER CODE	BEI-S50288

*STAND AND HEAT SOURCE NOT INCLUDED



STAND FOR BUFFET SOUP STATION

SPECIFICATIONS

MODEL	Inoxserv Induction Series S50290
DIMENSIONS	315 x 315 x 155mm high
HEAT SOURCE	Induction cooker > ISC-BT-70T Heating element > BEI-S205T Chafing fuel
SUPPLIED WITH	(1x) Chafing fuel holders

ORDER CODE BEI-S50290

*HEAT SOURCE NOT INCLUDED



HEATING ELEMENT WITH CONTROLLER - 250mm

SPECIFICATIONS

MODEL	Inoxserv S305T
ELECTRICITY	0.38kW, 230V, Single Phase
DIMENSIONS	250 x 200mm
COMPATIBLE WITH	Oblong - BEI-S60590 Square - BEI-S60290

ORDER CODE BEI-S305T



HEATING ELEMENT WITH CONTROLLER - 175mm

SPECIFICATIONS

MODEL	Inoxserv S205T
ELECTRICITY	0.33kW, 230V, Single Phase
DIMENSIONS	175 x 200mm
COMPATIBLE WITH	Round - BEI-S50280 Soup Station - BEI-S50290

ORDER CODE BEI-S205T



DROP IN / COUNTERSUNK MODELS - TOUCH CONTROL




SPECIFICATIONS

MODEL	SmartChef-i BT-200T1
ELECTRICITY	2kW, 230V, Single Phase
DIMENSIONS	375 x 305 x 75mm high
TEMPERATURE RANGE	60°C ~ 240°C
COMPATIBLE WITH	BEI-S60593 BEI-S60293 BEI-S50293 BEI-S50288

ORDER CODE

ISC-BT-200T1

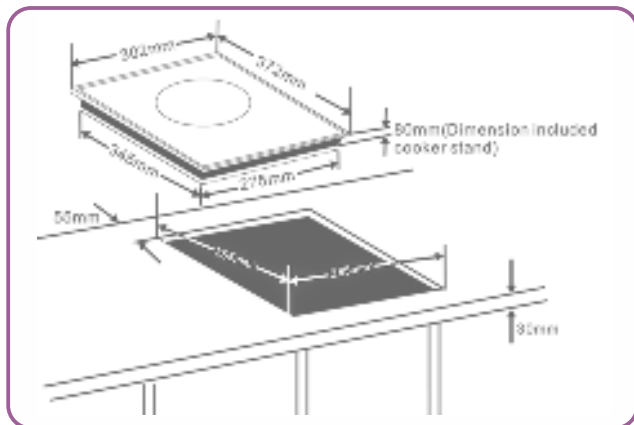

SPECIFICATIONS

MODEL	SmartChef-i BT-100T
ELECTRICITY	2kW, 230V, Single Phase
DIMENSIONS	245 x 245 x 60mm high
TEMPERATURE RANGE	60°C ~ 240°C
COMPATIBLE WITH	BEI-S60593 BEI-S60293 BEI-S50293 BEI-S50288

ORDER CODE

ISC-BT-100T

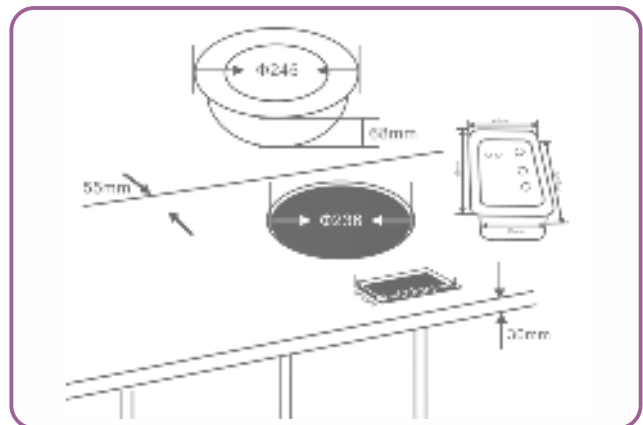


TABLE TOP MODEL - MANUAL CONTROL



SPECIFICATIONS

MODEL	SmartChef-i BF-100A
ELECTRICITY	1kW, 230V, Single Phase
DIMENSIONS	315 x 460 x 60mm high
TEMPERATURE RANGE	60°C ~ 240°C
COMPATIBLE WITH	BEI-S60593 BEI-S60293 BEI-S50293 BEI-S50288

ORDER CODE

ISC-BF-100A

IN-STAND MODEL - TOUCH CONTROL



SPECIFICATIONS

MODEL	SmartChef-i BT-70T
ELECTRICITY	1kW, 230V, Single Phase
DIMENSIONS	180 x 180 x 70mm high
TEMPERATURE RANGE	60°C ~ 240°C
COMPATIBLE WITH	BEI-S60590 BEI-S60290 BEI-S50290 BEI-S50280

ORDER CODE

ISC-BT-70T

CHAFING DISHES WINDOW / ECONOMIC SERIES

inoxserv



*HEAT SOURCE NOT INCLUDED

CHAFING DISH WITH SHOW WINDOW - RECTANGULAR SPECIFICATIONS

MODEL
DIMENSIONS
CAPACITY
HEAT SOURCE
SUPPLIED WITH

Inoxserv Show Window Series KS61363-2
645 x 475 x 435mm high
8.5Lt
Chafing fuel
(2x) 1/2GN pans - 65mm deep
Stand
(2x) Chafing fuel holders

ORDER CODE

BEI-KS61363-2



*HEAT SOURCE NOT INCLUDED

CHAFING DISH WITH SHOW WINDOW - ROUND SPECIFICATIONS

MODEL
DIMENSIONS
CAPACITY
HEAT SOURCE
SUPPLIED WITH

Inoxserv Show Window Series KS51363
500 x 530 x 450mm high
5Lt
Chafing fuel
(1x) Round pan - 65mm deep
Stand
(1x) Chafing fuel holder

ORDER CODE

BEI-KS51363



*HEAT SOURCE NOT INCLUDED

CHAFING DISH - RECTANGULAR SPECIFICATIONS

MODEL
DIMENSIONS
CAPACITY
HEAT SOURCE
SUPPLIED WITH

Inoxserv Economic Series AT61363-2
645 x 475 x 435mm high
8.5Lt
Chafing fuel
(2x) 1/2GN pans - 65mm deep
Stand
(2x) Chafing fuel holders

ORDER CODE

BEI-AT61363-2



*HEAT SOURCE NOT INCLUDED

CHAFING DISH - ROUND SPECIFICATIONS

MODEL
DIMENSIONS
CAPACITY
HEAT SOURCE
SUPPLIED WITH

Inoxserv Economic Series AT51363
500 x 530 x 450mm high
5Lt
Chafing fuel
(1x) Round pan - 65mm deep
Stand
(1x) Chafing fuel holder

ORDER CODE

BEI-AT51363



SOUP KETTLE SPECIFICATIONS

MODEL
ELECTRICITY
DIMENSIONS
CAPACITY
SUPPLIED WITH


Inoxserv Economic Series AT51388
230V, Single Phase
330 x 330mm high
9Lt
(1x) Round pan - 200mm deep

ORDER CODE

BEI-AT51388

FEATURES

- Stainless steel body
- Stainless steel pan
- Polycarbonate roll-top cover

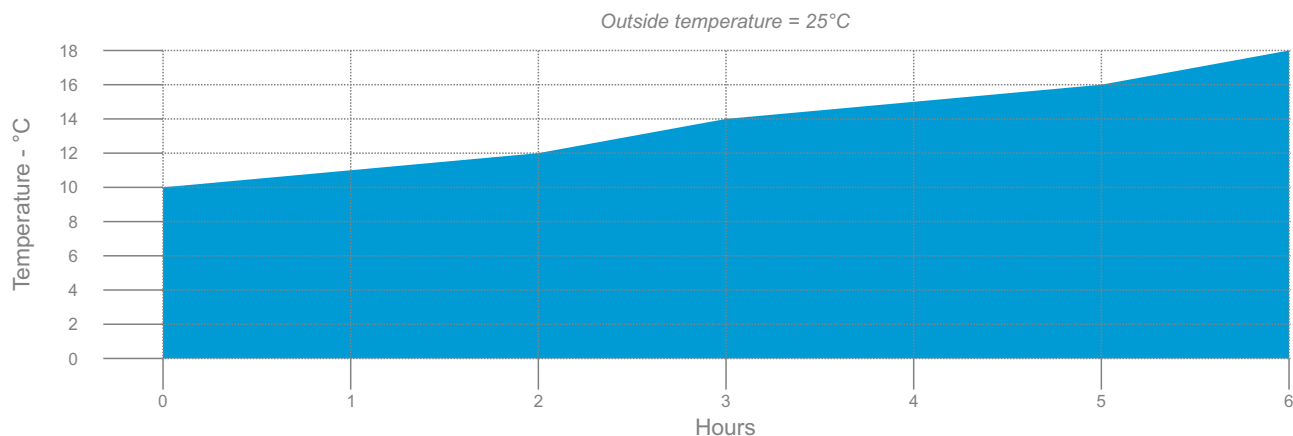

NEUTRAL DISPLAY

SPECIFICATIONS

MODEL	Inoxserv KS62160-1
DIMENSIONS	490 x 410 x 410mm high
PAN DIMENSIONS	475 x 270 x 60mm deep

ORDER CODE

BEI-KS62160-1



HEATED DISPLAY

SPECIFICATIONS

MODEL	Inoxserv SK62160-1
ELECTRICITY	1kW, 230V, Single Phase
DIMENSIONS	490 x 410 x 410mm high
PAN DIMENSIONS	475 x 270 x 60mm deep

ORDER CODE

BEI-SK62160-1



COLD DISPLAY

SPECIFICATIONS

MODEL	Inoxserv SC62140-1
DIMENSIONS	490 x 410 x 410mm high
PAN DIMENSIONS	475 x 270 x 40mm deep
SUPPLIED WITH	(2x) Freezer packs

ORDER CODE

BEI-SC62140-1

FEATURES

- Manufactured from 0.8mm heavy duty stainless steel
- Rounded edges
- Anti-Jam system
- Reinforced corners



FULL INSERT

SPECIFICATIONS

DIMENSIONS	325 x 530 x 20mm deep
CAPACITY	2.5Lt
ORDER CODE	GNF8020

DIMENSIONS	325 x 530 x 55mm deep
CAPACITY	7.5Lt
ORDER CODE	GNF8055

DIMENSIONS	325 x 530 x 65mm deep
CAPACITY	9Lt
ORDER CODE	GNF8065



1/2 INSERT

SPECIFICATIONS

DIMENSIONS	325 x 256 x 65mm deep
CAPACITY	4Lt
ORDER CODE	GNH8065



2/3 INSERTS

SPECIFICATIONS

DIMENSIONS	325 x 352 x 20mm deep
CAPACITY	1.5Lt
ORDER CODE	GN2T8020

DIMENSIONS	325 x 352 x 65mm deep
CAPACITY	5.5Lt
ORDER CODE	GN2T8065



1/3 INSERT

SPECIFICATIONS

DIMENSIONS	325 x 176 x 40mm deep
CAPACITY	1.5Lt
ORDER CODE	GNT8040

DIMENSIONS	325 x 176 x 65mm deep
CAPACITY	2.5Lt
ORDER CODE	GN8065



**FEATURES**

- Available in black or Stainless steel
- Stainless steel base (powder coated/polished)
- 304 stainless steel seamless insert
- Temperature control via thermostat
- Fitted with a hinged lid
- Fitted with non-slip feet

SPECIFICATIONS

ELECTRICITY	0.4kW, 220V, Single Phase
DIMENSIONS	Ø 330mm x 380mm high
WEIGHT	4Kg
TEMPERATURE RANGE	0 ~ 95°C
CAPACITY	10Lt

BLACK

MODEL	Inoxserve 83010SP
ORDER CODE	SKI0010

STAINLESS STEEL

MODEL	Inoxserve 81010SP
ORDER CODE	SKI1010

**POWDER
COATED
STAINLESS
STEEL BASE**

**TEMP.
CONTROL
(0 ~ 95°C)**

**NON
SLIP
FEET**

**HINGED
STAINLESS
STEEL LID**

**304
STAINLESS
STEEL
INSERT**



CEREAL DISPENSERS

inoxserv



CEREAL DISPENSER - DOUBLE LEVER PORTION CONTROL

SPECIFICATIONS

MODEL Inoxserv AT90123-2
DIMENSIONS 420 x 450 x 620mm high
CAPACITY (2x) 7Lt

ORDER CODE BEI-AT90123-2



CEREAL DISPENSER - SINGLE LEVER PORTION CONTROL

SPECIFICATIONS

MODEL Inoxserv AT90123
DIMENSIONS 420 x 230 x 620mm high
CAPACITY 7Lt

ORDER CODE BEI-AT90123



CEREAL DISPENSER - DOUBLE ROTATION PORTION CONTROL

SPECIFICATIONS

MODEL Inoxserv AT90133-2
DIMENSIONS 380 x 480 x 660mm high
CAPACITY (2x) 9Lt

ORDER CODE BEI-AT90133-2



CEREAL DISPENSER - SINGLE ROTATION PORTION CONTROL

SPECIFICATIONS

MODEL Inoxserv AT90133
DIMENSIONS 360 x 230 x 660mm high
CAPACITY 9Lt

ORDER CODE BEI-AT90133



STAINLESS STEEL

DOUBLE - STAINLESS STEEL

SPECIFICATIONS

MODEL Inoxserv AT90212-2
DIMENSIONS 365 x 450 x 535mm high
CAPACITY (2x) 7Lt
SUPPLIED WITH (2x) Freezer packs

ORDER CODE BEI-AT90212-2



SINGLE - STAINLESS STEEL

SPECIFICATIONS

MODEL Inoxserv AT90212
DIMENSIONS 365 x 230 x 535mm high
CAPACITY 7Lt
SUPPLIED WITH (1x) Freezer pack

ORDER CODE BEI-AT90212



BEACH WOOD

DOUBLE - BEACH WOOD

SPECIFICATIONS

MODEL Inoxserv AT90315-2
DIMENSIONS 350 x 450 x 580mm high
CAPACITY (2x) 7Lt
SUPPLIED WITH (2x) Freezer packs

ORDER CODE BEI-AT90315-2



SINGLE - BEACH WOOD

SPECIFICATIONS

MODEL Inoxserv AT90315
DIMENSIONS 350 x 230 x 580mm high
CAPACITY 7Lt
SUPPLIED WITH (1x) Freezer pack

ORDER CODE BEI-AT90315



JUICE DISPENSER - DOUBLE WITH CENTRE ICE TUBE

SPECIFICATIONS

MODEL Inoxserv AT90512-2
DIMENSIONS 350 x 540 x 580mm high
CAPACITY (2x) 8Lt

ORDER CODE

BEI-AT90512-2



JUICE DISPENSER - SINGLE WITH CENTRE ICE TUBE

SPECIFICATIONS

MODEL Inoxserv AT90512
DIMENSIONS 350 x 260 x 580mm high
CAPACITY 8Lt

ORDER CODE

BEI-AT90512



BEVERAGE DISPENSERS COLD / HOT

inoxserv



*HEAT SOURCE NOT INCLUDED

FEATURES

- The body is manufactured from Polycarbonate plastic, heat resistant up to 120 C
- Conveniently placed handles with removable stainless steel base for easy refilling
- Fitted with a stainless steel centre ice tube
- High polish stainless steel lid
- Fuel holder not included

12 LITRE - WITH CENTRE ICE TUBE

SPECIFICATIONS

MODEL	Inoxserv AT90012
DIMENSIONS	350 x 310 x 500mm high
CAPACITY	12Lt
HEAT SOURCE	Induction warmer Chafing fuel

ORDER CODE **BEI-AT90012**

DELUXE HOT WATER URNS

inoxserv

FEATURES

- Full stainless steel construction
- Conveniently placed handles with removable stainless steel base for easy refilling
- High polish finish
- Fuel holder not included



*HEAT SOURCE NOT INCLUDED

19 LITRE

SPECIFICATIONS

MODEL	Inoxserv AT80019
DIMENSIONS	350 x 310 x 620mm high
CAPACITY	19Lt
HEAT SOURCE	Induction warmer Chafing fuel

ORDER CODE **BEI-AT80019**



*HEAT SOURCE NOT INCLUDED

12 LITRE

SPECIFICATIONS

MODEL	Inoxserv AT80012
DIMENSIONS	350 x 310 x 500mm high
CAPACITY	12Lt
HEAT SOURCE	Induction warmer Chafing fuel

ORDER CODE **BEI-AT80012**



POLAR CAB

**MORE THAN JUST
REFRIGERATION...**



FRIDGES ❄️ FREEZERS ❄️ COOLERS ❄️ ICE MACHINES...

SECTION INDEX

Back bar coolers	135
Blast chillers	134
Chef bases	139
Display fridges	132
Freezers	
• Display freezers	132-137
• Ice cream scoop freezers	148-149
• Upright storage freezers	130-132
Fridges	
• Back bar coolers	135
• Display fridges	132
• Pizza ingredient fridges	136
• Saladette cabinets	136-138
• Upright storage fridges	130-132
Gelato machines	144
Ice cream scoop freezers	148-149
Ice machines	
• Modular	140-141
• Self-contained	142-143
Pizza ingredient fridges	136, 165
Saladette cabinets	136-138
Soft serve machines	145-147
Upright freezers	130-132
Upright fridges	130-132



FEATURES

- Exterior and interior stainless steel body (AISI304)
- Air managing system - provides inside refrigeration balance
- Lockable, reversible and self closing doors
- 20 level embossed guides for shelves or GN containers
- Auto defrost with heating element
- CFC free, high pressure injected polyurethane insulation
- High class energy saving design
- Hygienic and ergonomic interior custom design
- Ventilated air chamber with interior LED lighting



DOUBLE DOOR FRIDGE

SPECIFICATIONS

MODEL	Crystal ECO 1400S
ELECTRICITY	0.5kW, 230V, Single Phase
DIMENSIONS	1400 x 840 x 2060mm high
WEIGHT	175kg
INTERNAL DIMENSIONS	1240 x 690 x 1950mm high
CAPACITY	1250Lt
RUNNER SPACING	50mm
GRIDS SUPPLIED	(6x) 530 x 630mm
TEMPERATURE RANGE	2 ~ 8°C
REFRIGERANT GAS	R134a

ORDER CODE

CRY-ECO-E1400S



SINGLE DOOR FRIDGE

SPECIFICATIONS

MODEL	Crystal ECO 700S
ELECTRICITY	0.25kW, 230V, Single Phase
DIMENSIONS	700 x 840 x 2060mm high
WEIGHT	122kg
INTERNAL DIMENSIONS	620 x 690 x 1950mm high
CAPACITY	600Lt
RUNNER SPACING	50mm
GRIDS SUPPLIED	(3x) 530 x 630mm
TEMPERATURE RANGE	2 ~ 8°C
REFRIGERANT GAS	R134a

ORDER CODE

CRY-ECO-E700S




DOUBLE DOOR FREEZER ❄️

SPECIFICATIONS

MODEL	Crystal ECO 1400D
ELECTRICITY	0.87kW, 230V, Single Phase
DIMENSIONS	1400 x 840 x 2060mm high
WEIGHT	177kg
INTERNAL DIMENSIONS	1240 x 690 x 1950mm high
CAPACITY	1250Lt
RUNNER SPACING	50mm
GRIDS SUPPLIED	(6x) 530 x 630mm
TEMPERATURE RANGE	-22 ~ -10°C
REFRIGERANT GAS	R134a

ORDER CODE

CRY-ECO-E1400D



SINGLE DOOR FREEZER ❄️

SPECIFICATIONS

MODEL	Crystal ECO 700D
ELECTRICITY	0.55kW, 230V, Single Phase
DIMENSIONS	700 x 840 x 2060mm high
WEIGHT	125kg
INTERNAL DIMENSIONS	620 x 690 x 1950mm high
CAPACITY	600Lt
RUNNER SPACING	50mm
GRIDS SUPPLIED	(3x) 530 x 630mm
TEMPERATURE RANGE	-22 ~ -10°C
REFRIGERANT GAS	R134a

ORDER CODE

CRY-ECO-E700D



OPTIONAL EXTRAS

GRIDS

2/1 GN GRIDS
ORDER CODE

530 x 630mm
OGS0021

SHELF RUNNERS

LEFT SIDE
RIGHT SIDE

XECO-YELK53623L
XECO-YELK53624L

FEATURES

- Complete structure manufactured from stainless steel
- Sturdy U-rail, wire shelves
- Fitted with interior LED lighting
- Automatic defrost function
- Fitted with 4 device leveling legs
- Fitted with lockable, reversible, self-closing doors
- The adjustable support rails can also be used for GN pans
- Ventilated cooling
- Digital Dixell / Carel thermostat



DOUBLE DOOR FRIDGE

SPECIFICATIONS

MODEL	PolarCab MBF8117
ELECTRICITY	0.35kW, 230V, Single Phase
DIMENSIONS	1315 x 805 x 2065mm high
WEIGHT	171kg
INTERNAL DIMENSIONS	1194 x 685 x 1550mm high
CAPACITY	1240Lt
RUNNER SPACING	100mm
GRIDS SUPPLIED	(6x) 530 x 630mm
TEMPERATURE RANGE	2 ~ 8°C
REFRIGERANT GAS	R600a

ORDER CODE

PCY/MBF8117



SINGLE DOOR FRIDGE

SPECIFICATIONS

MODEL	PolarCab MBF8116
ELECTRICITY	0.22kW, 230V, Single Phase
DIMENSIONS	730 x 805 x 2065mm high
WEIGHT	107kg
INTERNAL DIMENSIONS	610 x 685 x 1550mm high
CAPACITY	670Lt
RUNNER SPACING	100mm
GRIDS SUPPLIED	(3x) 530 x 630mm
TEMPERATURE RANGE	2 ~ 8°C
REFRIGERANT GAS	R600a

ORDER CODE

PCY/MBF8116



DOUBLE DOOR FREEZER ❄️

SPECIFICATIONS

MODEL	PolarCab MBF8114
ELECTRICITY	0.98kW, 230V, Single Phase
DIMENSIONS	1315 x 805 x 2065mm high
WEIGHT	177kg
INTERNAL DIMENSIONS	1194 x 685 x 1550mm high
CAPACITY	1240Lt
RUNNER SPACING	100mm
GRIDS SUPPLIED	(6x) 530 x 630mm
TEMPERATURE RANGE	-22 ~ -17°C
REFRIGERANT GAS	R290

ORDER CODE

PCY/MBF8114



SINGLE DOOR FREEZER ❄️

SPECIFICATIONS

MODEL	PolarCab MBF8113
ELECTRICITY	0.6kW, 230V, Single Phase
DIMENSIONS	730 x 805 x 2065mm high
WEIGHT	115kg
INTERNAL DIMENSIONS	610 x 685 x 1550mm high
CAPACITY	670Lt
RUNNER SPACING	100mm
GRIDS SUPPLIED	(3x) 530 x 630mm
TEMPERATURE RANGE	-22 ~ -17°C
REFRIGERANT GAS	R290

ORDER CODE

PCY/MBF8113



OPTIONAL EXTRAS

GRIDS

2/1 GN GRIDS
ORDER CODE

530 x 630mm
OGS0021

SHELF RUNNERS

LEFT SIDE
RIGHT SIDE

XPCY-80037407
XPCY-80037408



CR 500



CRF 400 3D



CRF 400

SINGLE DOOR FRIDGE

SPECIFICATIONS

MODEL	Crystal CR 500
ELECTRICITY	0.36kW, 230V, Single Phase
DIMENSIONS	667 x 620 x 2018mm high
WEIGHT	102kg
INTERNAL DIMENSIONS	587 x 510 x 1593mm high
GROSS VOLUME	477Lt
GRIDS SUPPLIED	5
TEMPERATURE RANGE	2 ~ 7°C
REFRIGERANT GAS	R290

ORDER CODE

CRYGR-CR500



FEATURES

- Body manufactured from non-toxic, pre-painted sheet steel
- Fitted with self-closing glass doors
- Internal LED lighting
- Fitted with a digital controller
- CR500 - EBD electronic evaporator fan motor
- Hi efficiency compressor
- Two regulators
- Air cooled condenser
- Drainage outlet
- CR500 - Auto-defrost function
- CR500 - (5x) adjustable reinforced shelves
- CRF400 - (6x) evaporation shelves + floor shelf
- Fitted with (4x) castors

SINGLE DOOR FREEZER ❄️

SPECIFICATIONS

MODEL	Crystal CRF 400
ELECTRICITY	0.82kW, 230V, Single Phase
DIMENSIONS	667 x 620 x 2018mm high
WEIGHT	108kg
INTERNAL DIMENSIONS	547 x 490 x 1553mm high
GROSS VOLUME	417Lt
RUNNER SPACING	170mm
GRIDS SUPPLIED	6
TEMPERATURE RANGE	-25 ~ -18°C
REFRIGERANT GAS	R290

ORDER CODE

CRYGR-CRF400



SINGLE DOOR FREEZER 180° VIEW ❄️

SPECIFICATIONS

MODEL	Crystal CRF 400 3D
ELECTRICITY	0.82kW, 230V, Single Phase
DIMENSIONS	667 x 620 x 2018mm high
WEIGHT	118kg
INTERNAL DIMENSIONS	547 x 490 x 1553mm high
GROSS VOLUME	417Lt
RUNNER SPACING	170mm
GRIDS SUPPLIED	6
TEMPERATURE RANGE	-25 ~ -18°C
REFRIGERANT GAS	R290

ORDER CODE

CRYGR-CR400-3D



HORIZONTAL DISPLAY FREEZERS



FEATURES

- Manufactured from non-toxic, pre-painted sheet steel
- High efficiency compressor
- Air cooled condenser
- Mechanical thermostat
- Temperature display
- Sliding glass access panels
- Lock
- Drainage outlet
- Fitted with (4x) castors

SPECIFICATIONS

MODEL	Crystal EKTOR 36 SGL
ELECTRICITY	0.2kW, 230V, Single Phase
DIMENSIONS	1184 x 644 x 895mm high
WEIGHT	58kg
INTERNAL DIMENSIONS	1060 x 520 x 737mm high
GROSS VOLUME	356Lt
TEMPERATURE RANGE	-26 ~ -18°C
REFRIGERANT GAS	R290

ORDER CODE

CRYGR-EKTO36SGL

DISPLAY FREEZER / CHILLER TABLE MODEL



FEATURES

- High grade stainless steel construction interior and exterior
- Self closing / stay open glass door
- Magnetic door gaskets
- Easy to clean black plastic door handle
- Fitted with a standard safety door lock
- Forced air system
- Heavy duty Embraco compressor
- Polyurethane foam insulation
- LED lighting installed
- Splash proof cover to control panel

SPECIFICATIONS

MODEL	PolarCab MBC24FG
ELECTRICITY	0.53kW, 230V, Single Phase
EXTERIOR DIMENSIONS	605 x 635 x 825mm high
INTERIOR DIMENSIONS	495 x 517 x 561mm high
SHELVES SUPPLIED	(2x) 380 x 475mm
WEIGHT	59kg
TEMPERATURE RANGE	-20 ~ -17°C
REFRIGERANT GAS	R290

ORDER CODE

PCY/MBC24MG





FEATURES

- AISI 304 stainless steel construction
- Inside fan support can be opened for easy cleaning
- Reversible, self-closing door
- Fitted with a built-in food probe for accurate temperature monitoring
- Controller with electronic time or probe programming
- Compatible with GN and 600 x 400mm baking trays
- Fitted with 4 device levelling legs

15 PAN

SPECIFICATIONS

MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
CAPACITY

BLAST CHILL PERFORMANCE
SHOCK FREEZE PERFORMANCE
REFRIGERANT GAS

MEC Cold ART151164
4.43kW, 380V, 3 Phase + N
820 x 860 x 1820mm high
160kg
(15x) 1/1 GN trays
(15x) 600 x 400 mm trays
60kg, 70°C to 3°C in 90min
40kg, 70°C to -18°C in 90min
R404a

ORDER CODE

BCM1511



10 PAN

SPECIFICATIONS

MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
CAPACITY

BLAST CHILL PERFORMANCE
SHOCK FREEZE PERFORMANCE
REFRIGERANT GAS

MEC Cold ART101164
3.35kW, 380V, 3 Phase + N
820 x 860 x 1470mm high
150kg
(10x) 1/1 GN trays
(10x) 600 x 400 mm trays
40kg, 70°C to 3°C in 90min
25kg, 70°C to -18°C in 90min
R404a

ORDER CODE

BCM1011



5 PAN

SPECIFICATIONS

MODEL
ELECTRICITY
DIMENSIONS
WEIGHT
CAPACITY

BLAST CHILL PERFORMANCE
SHOCK FREEZE PERFORMANCE
REFRIGERANT GAS

MEC Cold ART51164
1.3kW, 230V, Single Phase
820 x 860 x 850mm high
90kg
(5x) 1/1 GN trays
(5x) 600 x 400mm trays
20kg, 70°C to 3°C in 90min
13kg, 70°C to -18°C in 90min
R404a

ORDER CODE

BCM0511



FEATURES

- Black units - Outer cabinet manufactured from coated mild steel
- Stainless steel units - Outer cabinet manufactured stainless steel
- High pressure injected 40mm cyclopentane insulation
- Cabinet interior manufactured from compressed aluminium
- 14W square fan assisted condenser
- Automatic defrost function
- Doors are fitted with tempered glass
- Fitted with adjustable feet for easy leveling
- Fitted with a digital temperature control and display
- Smooth action sliding doors / hinged doors
- Standard with internal LED lights and locks



3 DOOR

SPECIFICATIONS

MODEL	PolarCab LG320
ELECTRICITY	0.67kW, 220V, Single Phase
EXTERNAL DIMENSIONS	1350 x 520 x 850mm high
WEIGHT	80kg
INTERNAL DIMENSIONS	1260 x 385 x 700mm high
GROSS VOLUME	320Lt
TEMPERATURE RANGE	2 ~ 10°C
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(6x) 400 x 345mm

SLIDING DOORS - BLACK
HINGED DOORS - BLACK
HINGED DOORS - S/STEEL

BBP0003
BBP1003
BBP3003



2 DOOR

SPECIFICATIONS

MODEL	PolarCab LG198
ELECTRICITY	0.23kW, 220V, Single Phase
EXTERNAL DIMENSIONS	900 x 520 x 850mm high
WEIGHT	62kg
INTERNAL DIMENSIONS	820 x 385 x 700mm high
GROSS VOLUME	198Lt
TEMPERATURE RANGE	2 ~ 10°C
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(4x) 400 x 345mm

SLIDING DOORS - BLACK
HINGED DOORS - BLACK
HINGED DOORS - S/STEEL

BBP0002
BBP1002
BBP3002



SINGLE DOOR

SPECIFICATIONS

MODEL	PolarCab LG128
ELECTRICITY	0.18kW, 220V, Single Phase
EXTERNAL DIMENSIONS	600 x 520 x 850mm high
WEIGHT	46kg
INTERNAL DIMENSIONS	520 x 385 x 700mm high
GROSS VOLUME	128Lt
TEMPERATURE RANGE	2 ~ 10°C
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(2x) 500 x 345mm

HINGED DOOR - BLACK
HINGED DOOR - S/STEEL

BBP1001
BBP3001



DIGITAL TEMPERATURE
CONTROL AND DISPLAY



SHOWN WITH OPTIONAL PIZZA
INGREDIENT FRIDGE

FEATURES

- Heavy duty construction, exterior and interior of high grade 304 stainless steel and galvanised steel back
- Fitted with granite top
- Automatic defrost
- Self closing doors
- Efficient refrigeration system
- Fitted with digital Dixell / Carel thermostat
- Supplied with GN tray slides in all doors
- Bottom mounted motor suitable for use in high temperature areas
- Fitted with (4x) adjustable legs

SPECIFICATIONS

MODEL	PolarCab EL3852
ELECTRICITY	0.22kW, 230V, Single Phase
DIMENSIONS	1365 x 700 x 1030mm high
WEIGHT	190kg
NUMBER OF DOORS	3
RUNNER SPACING	55mm
SHELVES SUPPLIED	(3x) GN 1/1 grids
CAPACITY	380Lt
TEMPERATURE RANGE	2 ~ 8°C
REFRIGERANT GAS	R134a

ORDER CODE

PCY/EL3852



PIZZA INGREDIENT FRIDGE



6 DIVISION 1/4 GN SPECIFICATIONS

MODEL	PolarCab ESL3861
ELECTRICITY	0.3kW, 230V, Single Phase
DIMENSIONS	1400 x 335 x 435mm high
WEIGHT	41kg
CAPACITY	(6x) 1/4 GN pans (3x) 1/2 GN pans
TEMP RANGE	2 ~ 8°C
REFRIGERANT GAS	R134a

ORDER CODE

PCY/ESL3861



FEATURES

- Compact design to minimize footprint
- Glass panels are easy to remove for cleaning
- Low maintenance auto defrost function
- Can accommodate 1/4 and 1/2 GN pans
- Fitted with digital temperature controller
- Insert pans not included



SALADETTE

GRANITE TOP WITH SNEEZE GUARD



FEATURES

- Exterior and interior manufactured from 304 Stainless Steel and Galvanised steel back
- Fitted with granite top
- Fitted with glass sneeze guard
- Automatic defrost
- Self closing doors
- Efficient refrigeration system
- Fitted with digital Dixell / Carel thermostat
- Supplied with GN tray slides in all doors
- Bottom mounted motor suitable for use in high temperature areas
- Insert pans not included
- Fitted with (4x) adjustable legs



SPECIFICATIONS

MODEL	PolarCab ELS3864
ELECTRICITY	0.31kW, 230V, Single Phase
DIMENSIONS	1365 x 700 x 1100mm high
WEIGHT	170kg
NUMBER OF DOORS	3
RUNNER SPACING	55mm
SHELVES SUPPLIED	(3x) GN 1/1 grids
CAPACITY	380Lt
DISPLAY CAPACITY	(7x) 1/3 GN pans
TEMPERATURE RANGE	2 ~ 8°C
REFRIGERANT GAS	R134a

ORDER CODE

PCY/ELS3864



SALADETTE

PIZZA TOP WITH HINGED LID



FEATURES

- Exterior and interior manufactured from 304 Stainless Steel and Galvanised steel back
- Bottom mounted motor suitable for use in high temperature areas
- Automatic defrost
- Efficient refrigeration system
- Supplied with GN tray slides in all doors
- Fitted with (4x) adjustable legs
- Self closing doors
- Fitted with digital Dixell / Carel thermostat
- Insert pans not included



SPECIFICATIONS

MODEL	PolarCab ELS3853
ELECTRICITY	0.31kW, 230V, Single Phase
DIMENSIONS	1365 x 700 x 1040mm high
WEIGHT	105kg
NUMBER OF DOORS	3
RUNNER SPACING	55mm
SHELVES SUPPLIED	(3x) GN 1/1 grids
CAPACITY	380Lt
TEMPERATURE RANGE	2 ~ 8°C
REFRIGERANT GAS	R134a

ORDER CODE

PCY/ELS3853



SALADETTE

CUTTING BOARD WITH HINGED LID

FEATURES

- Exterior and interior manufactured from 304 Stainless Steel and Galvanised steel back
- Bottom mounted motor suitable for use in high temperature areas
- Automatic defrost
- Efficient refrigeration system
- Supplied with GN tray slides in all doors
- Fitted with (4x) adjustable legs
- Self closing doors
- Fitted with digital Dixell / Carel thermostat
- Insert pans not included



SPECIFICATIONS

MODEL	PolarCab ELS3850
ELECTRICITY	0.31kW, 230V, Single Phase
DIMENSIONS	1365 x 700 x 890mm high
WEIGHT	87kg
NUMBER OF DOORS	3
RUNNER SPACING	55mm
SHELVES SUPPLIED	(3x) GN 1/1 grids
CAPACITY	380Lt
TEMPERATURE RANGE	2 ~ 8°C
REFRIGERANT GAS	R134a

ORDER CODE

PCY/ELS3850



FEATURES

- Stainless steel exterior and interior
- Dixell digital controller
- Recessed door handles
- Magnetic drawer gaskets
- Pre-installed casters
- One-Piece heavy duty reinforced stainless steel top
- Heavy Duty Embraco Controller
- Heavy Duty stainless steel drawer slides and rollers
- Gravity fed self closing drawers
- Stainless steel pans included



1800mm

SPECIFICATIONS

MODEL	CookRite MGF8453GR
ELECTRICITY	0.3kW, 230V, Single Phase
DIMENSIONS	1840 x 814 x 675mm high
WEIGHT	136kg
NUMBER OF DRAWERS	4
PANS PER DRAWER	(2x) 1/1GN
TEMPERATURE RANGE	2 ~ 5°C
REFRIGERANT GAS	R290

ORDER CODE

CR/MGF8453GR



1200mm

SPECIFICATIONS


MODEL	CookRite MGF8450GR
ELECTRICITY	0.3kW, 230V, Single Phase
DIMENSIONS	1230 x 814 x 675mm high
WEIGHT	117kg
NUMBER OF DRAWERS	2
PANS PER DRAWER	(2x) 1/1GN
TEMPERATURE RANGE	2 ~ 5°C
REFRIGERANT GAS	R290

ORDER CODE


CR/MGF8450GR



MGF8453GR

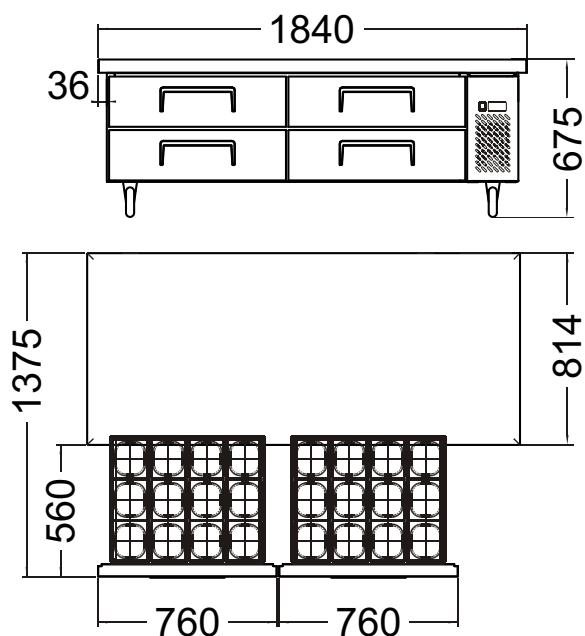

MGF8450GR

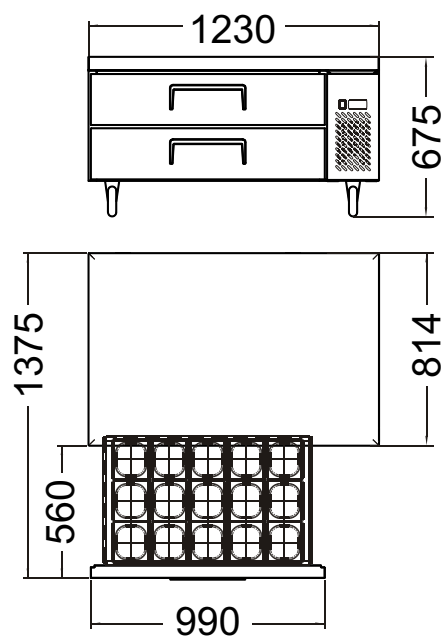

MODULAR ICE MACHINES, CUBES & FLAKERS



FEATURES

- Body manufactured from AISI304 stainless steel
- Unit requires installation, water connection and a waste drainage point
- Electromechanical unit - no PC boards
- Ice production calculated at ambient temperature 21°C and water temperature 15°C

INSTALLATION CONDITIONS

- Ambient temperature: Min +10°C / Max +38°C
- Water temperature: Min +3°C / Max +28°C
- Voltage: +/-10%
- Water pressure: Min 1 bar (14psi) / Max 6 bar (84psi)

GOURMET CUBES - 300kg

SPECIFICATIONS

MODEL	Brice ECPM300A
ELECTRICITY	2.6kW, 220V, Single Phase
DIMENSIONS	1250 x 580 x 848mm high
WEIGHT	152kg
PRODUCTION /24H	300kg
CUBE	Gourmet Bell shape - 18gr
REFRIGERANT GAS	R452a
COMPATIBLE BIN	IMB/BIN350

ORDER CODE

IMB/ECPM300A



GOURMET CUBES - 155kg

SPECIFICATIONS

MODEL	Brice ECPM150A
ELECTRICITY	1.4kW, 220V, Single Phase
DIMENSIONS	862 x 555 x 720mm high
WEIGHT	118kg
PRODUCTION /24H	155kg
CUBE	Gourmet Bell shape - 18gr
REFRIGERANT GAS	R452a
COMPATIBLE BIN	IMB/BIN240 • IMB/BIN350

ORDER CODE

IMB/ECPM150A



FLAT CUBE - 400kg

SPECIFICATIONS

MODEL	Brice EFM500A
ELECTRICITY	3kW, 220V, Single Phase
DIMENSIONS	770 x 550 x 805mm high
WEIGHT	113kg
PRODUCTION /24H	400kg
CUBE	Flat shape - 7gr
REFRIGERANT GAS	R452a
COMPATIBLE BIN	IMB/BIN350

ORDER CODE

IMB/EFM500A



FLAT CUBE - 200kg

SPECIFICATIONS

MODEL	Brice EFM200A
ELECTRICITY	1.6kW, 220V, Single Phase
DIMENSIONS	770 x 555 x 805mm high
WEIGHT	90kg
PRODUCTION /24H	200kg
CUBE	Flat shape - 7gr
REFRIGERANT GAS	R452a
COMPATIBLE BIN	IMB/BIN240 • IMB/BIN350

ORDER CODE

IMB/EFM200A



ICE FLAKER - 280kg

SPECIFICATIONS

MODEL	Brice EMS280A
ELECTRICITY	1.05kW, 220V, Single Phase
DIMENSIONS	560 x 670 x 695mm high
WEIGHT	83kg
PRODUCTION /24H	280kg
CUBE	Flakes
REFRIGERANT GAS	R452a
COMPATIBLE BIN	IMB/BIN350

ORDER CODE

IMB/EMS280A



ICE FLAKER - 160kg

SPECIFICATIONS

MODEL	Brice EMS160A
ELECTRICITY	1.05kW, 220V, Single Phase
DIMENSIONS	560 x 570 x 600mm high
WEIGHT	63kg
PRODUCTION /24H	160kg
CUBE	Flakes
REFRIGERANT GAS	R452a
COMPATIBLE BIN	IMB/BIN240 • IMB/BIN350

ORDER CODE

IMB/EMS160A



MODULAR ICE MACHINES,
BINS



FEATURES

- Manufactured from Stainless Steel
- Wide opening Stainless Steel lid for easy access to the ice
- Fully insulated
- Available in 350Lt and 240Lt units
- Fitted with adjustable feet

350 LITRE
SPECIFICATIONS

MODEL	BIN350
DIMENSIONS	1250 x 750 x 1000mm high
WEIGHT	75kg
CAPACITY	350Lt
COMPATIBLE WITH	ECPM150A • ECPM300A ECPM200A • EFM500A ESM160A • ESM280A

ORDER CODE IMB/BIN350



240 LITRE
SPECIFICATIONS

MODEL	BIN240
DIMENSIONS	1000 x 750 x 1000mm high
WEIGHT	60kg
CAPACITY	240Lt
COMPATIBLE WITH	ECPM150A • EFM200A ESM160A

ORDER CODE IMB/BIN240



ICE MACHINE
SHOWN WITH ICE BIN





**GOURMET
CUBE**

FEATURES

- Body manufactured from AISI304 stainless steel
- Unit requires installation, water connection and a waste drainage point
- Electromechanical unit - no PC boards
- Ice production calculated at ambient temperature 21°C and water temperature 15°C

INSTALLATION CONDITIONS

- Ambient temperature: Min +10°C / Max +38°C
- Water temperature: Min +3°C / Max +28°C
- Voltage: +/-10%
- Water pressure: Min 1 bar (14psi) / Max 6 bar (84psi)

155kg

SPECIFICATIONS

MODEL	Brice ECP155A
ELECTRICITY	1.4kW, 220V, Single Phase
DIMENSIONS	840 x 740 x 1075mm high
WEIGHT	118kg
PRODUCTION /24H	155kg
STORAGE CAPACITY	65kg
CUBE	Gourmet Bell shape - 18gr
REFRIGERANT GAS	R452a

ORDER CODE

IMB/ECP155A



100kg

SPECIFICATIONS

MODEL	Brice ECP100A
ELECTRICITY	0.87kW, 220V, Single Phase
DIMENSIONS	735 x 603 x 1010mm high
WEIGHT	74kg
PRODUCTION /24H	100kg
STORAGE CAPACITY	60kg
CUBE	Gourmet Bell shape - 18gr
REFRIGERANT GAS	R452a

ORDER CODE

IMB/ECP100A



80kg

SPECIFICATIONS

MODEL	Brice ECP80A
ELECTRICITY	0.89kW, 220V, Single Phase
DIMENSIONS	735 x 603 x 910mm high
WEIGHT	71kg
PRODUCTION /24H	88kg
STORAGE CAPACITY	40kg
CUBE	Gourmet Bell shape - 18gr
REFRIGERANT GAS	R452a

ORDER CODE

IMB/ECP80A



46kg

SPECIFICATIONS

MODEL	Brice ECP46A
ELECTRICITY	0.45kW, 220V, Single Phase
DIMENSIONS	497 x 592 x 687mm high
WEIGHT	43kg
PRODUCTION /24H	46kg
STORAGE CAPACITY	16kg
CUBE	Gourmet Bell shape - 18gr
REFRIGERANT GAS	R452a

ORDER CODE

IMB/ECP46A



28kg

SPECIFICATIONS

MODEL	Brice ECF28A
ELECTRICITY	0.27kW, 220V, Single Phase
DIMENSIONS	387 x 470 x 687mm high
WEIGHT	33kg
PRODUCTION /24H	25kg
STORAGE CAPACITY	9kg
CUBE	Gourmet Bell shape - 18gr
REFRIGERANT GAS	R452a

ORDER CODE

IMB/ECF28A



18kg

SPECIFICATIONS

MODEL	Brice ECP18A
ELECTRICITY	0.32kW, 220V, Single Phase
DIMENSIONS	355 x 404 x 590mm high
WEIGHT	28kg
PRODUCTION /24H	22kg
STORAGE CAPACITY	4kg
CUBE	Gourmet Bell shape - 13gr
REFRIGERANT GAS	R452a

ORDER CODE

IMB/ECP18A





FEATURES

- Durable body with s/s cabinet
- Space saving design
- Ideal for bar and undercounter application
- Removable filter for easy cleaning - Protects against condenser blockage
- Supplied with in-line water filter
- Supplied with water inlet pipe, ice scoop and water drainage pipe
- LCD control panel

INSTALLATION CONDITIONS

- Ambient temperature: Min +10°C / Max +38°C
- Water temperature: Min +3°C / Max +28°C
- Voltage: +/-10%
- Water pressure: Min 1 bar (14psi) / Max 6 bar (84psi)

60kg

SPECIFICATIONS

MODEL	PolarCab LB120S-C
ELECTRICITY	0.42kW, 220V, Single Phase
DIMENSIONS	510 x 600 x 840mm high
WEIGHT	45kg
PRODUCTION /24H	60kg
STORAGE CAPACITY	27kg
CUBE	Square Cube shape - 8gr
REFRIGERANT GAS	R404a

ORDER CODE

IMP/LB120S-C



40kg

SPECIFICATIONS

MODEL	PolarCab LB80S-C
ELECTRICITY	0.32kW, 220V, Single Phase
DIMENSIONS	510 x 450 x 840mm high
WEIGHT	35kg
PRODUCTION /24H	40kg
STORAGE CAPACITY	20kg
CUBE	Square Cube shape - 8gr
REFRIGERANT GAS	R134a

ORDER CODE

IMP/LB80S-C



25kg

SPECIFICATIONS

MODEL	PolarCab LB55S-C
ELECTRICITY	0.26kW, 220V, Single Phase
DIMENSIONS	510 x 450 x 840mm high
WEIGHT	35kg
PRODUCTION /24H	25kg
STORAGE CAPACITY	20kg
CUBE	Square Cube shape - 8gr
REFRIGERANT GAS	R134a

ORDER CODE

IMP/LB55S-C



SQUARE CUBE



GELATO MACHINES COUNTER TOP



FEATURES

- Body manufactured from stainless steel
- Compact design uses less workspace
- Transparent polycarbonate feeder hopper located in the front of the machine for easy and accurate operation
- Large stainless steel freezing cylinder increases output and "fluffiness" of the ice cream
- Retractable, rotating mixer blade inside the cylinder further improves the smoothness of the ice cream
- Fitted with a powerful, energy saving compressor
- Fitted with a digital, waterproof control panel
- Fitted with (4x) non-slip feet

SPECIFICATIONS

MODEL	Goshen BQ12T
ELECTRICITY	1kW, 220V, Single Phase
DIMENSIONS	500 x 705 x 800mm high
WEIGHT	100kg
HOPPER VOLUME	5.1Lt
REFRIGERANT GAS	R404a
HOURLY OUTPUT	10 ~ 14Lt/hour


ORDER CODE

ICM/BQ12T




OPTIONAL EXTRAS

ICE CREAM INSERT - 360 x 165 x 120mm deep
ORDER CODE **GNI8120**

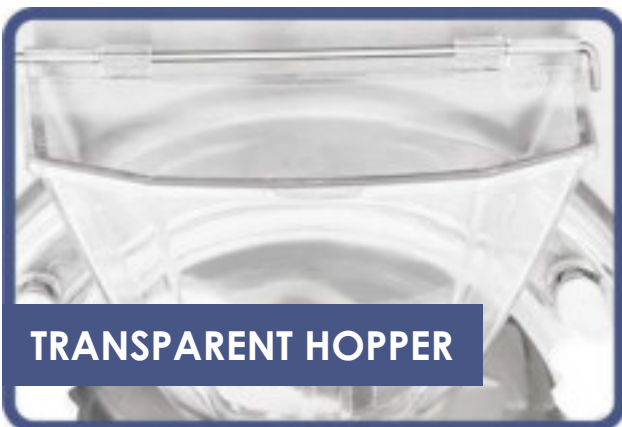

TRANSPARENT HOPPER

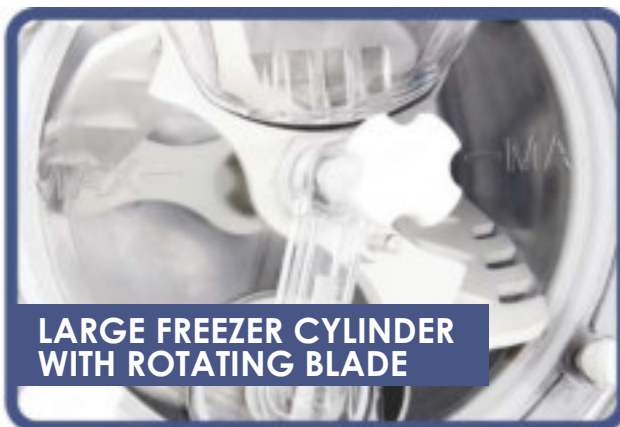

**LARGE FREEZER CYLINDER
WITH ROTATING BLADE**



**WATERPROOF
DIGITAL CONTROL PANEL**



SOFT SERVE MACHINES COUNTER TOP



FEATURES

- Exquisite modern design. Small and portable
- Silent operation
- Fitted with a stainless steel refrigerated hopper
- Mixer installed inside hopper makes for smoother ice cream
- Fitted with a stainless steel beater
- Built-in air pump
- Fitted with a 7inch, touch screen control panel
- One-touch thaw function
- Fitted with (4x) non-slip feet



COOL & COMPACT SPECIFICATIONS

MODEL	Goshen ST16RELW
ELECTRICITY	1.25kW, 220V, Single Phase
DIMENSIONS	210 x 554 x 740mm high
WEIGHT	45kg
HOPPER VOLUME	6Lt
REFRIGERANT GAS	R290
HOURLY OUTPUT	16 ~ 18Lt/hour
REALISTIC OUTPUT	12Lt (100 x 120g servings)

ORDER CODE SSM/ST16RELW-W

FEATURES

- Exquisite modern design. Small and portable
- Silent operation
- Fitted with a stainless steel hopper
- Fitted with a food grade plastic beater
- Built-in air pump
- Fitted with a 5inch, waterproof, touch control panel
- Built-in thaw function
- Fitted with (4x) non-slip feet
- Available in 3 exciting candy colours



COMPACT SPECIFICATIONS

MODEL	Goshen ST16E
ELECTRICITY	1.15kW, 220V, Single Phase
DIMENSIONS	210 x 554 x 740mm high
WEIGHT	43kg
HOPPER VOLUME	6Lt
REFRIGERANT GAS	R290
HOURLY OUTPUT	16 ~ 18Lt/hour
REALISTIC OUTPUT	12Lt (100 x 120g servings)

ORDER CODE SSM/ST16E-W ☐ WHITE
SSM/ST16E-P ☐ PINK
SSM/ST16E-Y ☐ YELLOW



SOFT SERVE MACHINES WITH REFRIGERATED HOPPER



FEATURES

- Compact design - can be installed in small areas
- Unique mixing shaft manufactured with stainless steel axes with non-toxic corkscrew plastic scrapers
- Fitted with 2 stainless steel refrigerated hoppers with clear plastic lids for easy viewing
- Quick recovery time
- Low noise and vibrations
- Gravity feed machine
- Easy to disassemble and clean
- Fitted with removable plastic drip tray
- IT Push panel (one touch switch) controller with indicator light for easy operation



FLOOR STANDING

SPECIFICATIONS

MODEL	PolarCab SQL-922
ELECTRICITY	2kW, 230V, Single Phase
DIMENSIONS	550 x 700 x 1330mm high
WEIGHT	140kg
REFRIGERANT GAS	R22
HOPPER CAPACITY	(2x) 5.8Lt
OUTPUT PER HOUR	180 cones

ORDER CODE

SSM1002



TABLE MODEL

SPECIFICATIONS

MODEL	PolarCab SQL-922C
ELECTRICITY	2kW, 230V, Single Phase
DIMENSIONS	550 x 700 x 1080mm high
WEIGHT	115kg
REFRIGERANT GAS	R22
HOPPER CAPACITY	(2x) 5.8Lt
OUTPUT PER HOUR	180 cones

ORDER CODE

SSM1001



SOFT SERVE MACHINES WITH DOUBLE BARREL

SmartChef



FEATURES

- Easy to operate touch control panel
- Fitted with (2x) stainless steel hoppers
- Quick recovery time
- Low noise and vibration
- Gravity feed machine
- Easy to disassemble and clean
- Fitted with removable plastic drip tray for easy cleaning
- Fitted with (4x) castors

FLOOR STANDING

SPECIFICATIONS

MODEL	SmartChef HIM-02
ELECTRICITY	1.7kW, 230V, Single Phase
DIMENSIONS	700 x 900 x 1435mm high
WEIGHT	135kg
REFRIGERANT GAS	R22/R404A
HOPPER CAPACITY	(2x) 6.5L†
OUTPUT PER HOUR	90 cones

ORDER CODE

SSM-HIM-02



ICE CREAM SCOOP FREEZERS TABLE MODEL

Galileo

FEATURES

- Stainless steel exterior and interior finish with tempered glass
- Fan assisted cooling
- Digital controller and temperature display
- Removable sliding door for easy cleaning
- Fully automatic
- Fan assisted condenser
- Interior LED light with switch
- Removable door gasket



5 DIVISION

SPECIFICATIONS

MODEL	Galileo TSF-120
ELECTRICITY	0.75kW, 230V, Single Phase
DIMENSIONS	1200 x 550 x 790mm high
WEIGHT	140kg
CAPACITY	(5x) 1/3 GN inserts - 100mm
TEMPERATURE RANGE	-18 ~ -12°C
REFRIGERANT GAS	R404a

ORDER CODE

IFG/TSF-120



3 DIVISION

SPECIFICATIONS

MODEL	Galileo TSF-90
ELECTRICITY	0.65kW, 230V, Single Phase
DIMENSIONS	900 x 550 x 790mm high
WEIGHT	120kg
CAPACITY	(3x) 1/3 GN inserts - 100mm
TEMPERATURE RANGE	-18 ~ -12°C
REFRIGERANT GAS	R404a

ORDER CODE

IFG/TSF-90



ICE CREAM SCOOP FREEZERS FLOOR STANDING



FEATURES

- Manufactured from non-toxic sheet steel
- High efficiency compressor
- Air cooled condenser
- Mechanical Thermostat
- Temperature display
- Stainless steel sockets for stainless steel or plastic ice cream inserts
- Storage space with a separate door
- Serving bench with a scoop washer system
- LED Illuminated canopy
- Fitted with (4x) castors
- Supplied without inserts

SPECIFICATIONS

MODEL	Crystal ELEGANTE 36
ELECTRICITY	0.23kW, 230V, Single Phase
DIMENSIONS	1206 x 862 x 1263mm high
WEIGHT	90kg
INTERNAL DIMENSIONS	1060 x 560 x 688mm high
GROSS VOLUME	358Lt
BIN CAPACITY	(9x) 360 x 165mm S/steel bins (9x) 360 x 155mm Plastic bins
TEMPERATURE RANGE	-22 ~ -15°C
REFRIGERANT GAS	R290

ORDER CODE

CRYGR-ELEGANT36



SEPARATE STORAGE SPACE

OPTIONAL EXTRAS

ICE CREAM INSERT - 360 x 165 x 120mm deep
ORDER CODE GNI8120





 **IGLOO**
OPEN COOLER MERCHANDISER

SECTION INDEX

Display cabinets

• Heated	155, 157, 159
• Neutral	153, 157, 159
• Refrigerated	152, 154-156, 158
Floor standing display cabinets	152-154, 156-159
Heated Display cabinets	155, 157, 159
Ice cream scoop freezers	164
Merchandisers	
• Open cooler	161
• Open island	162-163
• Wall chillers	161
Neutral Display cabinets	153, 157, 159
Open cooler merchandisers	161
Open island merchandisers	162-163
Pie warmers	164
Pizza ingredient fridges	165
Refrigerated Display cabinets	152, 154-156, 158
Sneeze guards	160
Table model display cabinets	155, 164
Wall chillers	161



REFRIGERATED DISPLAY CABINETS

HIGH CUBE

Galileo



FEATURES

- Stainless steel decorative front panel
- Fitted with a SECOP compressor
- Electric heating front glass for de-fogging
- Fitted with removable, sliding glass doors
- Fitted with adjustable feet
- LED lighting under each shelf - Energy saving
- Fitted with a Dixell electronic controller
- Automatic defrost function
- Supplied with 3 adjustable stainless steel shelves

1.5 METER

SPECIFICATIONS

MODEL Galileo WDF157Z
ELECTRICITY 0.83kW, 220V, Single Phase
DIMENSIONS 1500 x 750 x 1350mm high
WEIGHT 298kg
DISPLAY SURFACE 2.55m²
SHELF DIM (3x) 1395 x 345mm
(1x) 1500 x 740mm
TEMP RANGE 2 ~ 8°C
REFRIGERANT GAS R290

ORDER CODE

DCG/WDF157Z



1.2 METER

SPECIFICATIONS

MODEL Galileo WDF127Z
ELECTRICITY 0.74kW, 220V, Single Phase
DIMENSIONS 1200 x 750 x 1350mm high
WEIGHT 273kg
DISPLAY SURFACE 2.02m²
SHELF DIMENSIONS (3x) 1095 x 345mm
(1x) 1200 x 740mm
TEMP RANGE 2 ~ 8°C
REFRIGERANT GAS R290

ORDER CODE

DCG/WDF127Z



0.9 METER

SPECIFICATIONS

MODEL Galileo WDF097Z
ELECTRICITY 0.53kW, 220V, Single Phase
DIMENSIONS 900 x 750 x 1350mm high
WEIGHT 231kg
DISPLAY SURFACE 1.48m²
SHELF DIMENSIONS (3x) 795 x 345mm
(1x) 900 x 740mm
TEMP RANGE 2 ~ 8°C
REFRIGERANT GAS R290

ORDER CODE

DCG/WDF097Z



SLIDING BACK DOORS

NEUTRAL DISPLAY CABINETS

HIGH CUBE

Galileo



FEATURES

- Stainless steel decorative front panel
- Fitted with removable, sliding glass doors
- Fitted with adjustable feet
- LED lighting under each shelf - Energy saving
- Supplied with 3 adjustable stainless steel shelves

1.5 METER

SPECIFICATIONS

MODEL	Galileo WDF157ZSA11
ELECTRICITY	0.2kW, 220V, Single Phase
DIMENSIONS	1500 x 750 x 1350mm high
WEIGHT	288kg
DISPLAY SURFACE	2.55m ²
SHELF DIM	(3x) 1395 x 345mm (1x) 1500 x 740mm

ORDER CODE

DCG/WDF157ZSA11



1.2 METER

SPECIFICATIONS

MODEL	Galileo WDF127ZSA11
ELECTRICITY	0.2kW, 220V, Single Phase
DIMENSIONS	1200 x 750 x 1350mm high
WEIGHT	263kg
DISPLAY SURFACE	2.02m ²
SHELF DIMENSIONS	(3x) 1095 x 345mm (1x) 1200 x 740mm

ORDER CODE

DCG/WDF127ZSA11



ADJUSTABLE FEET

0.9 METER

SPECIFICATIONS

MODEL	Galileo WDF097ZSA11
ELECTRICITY	0.2kW, 220V, Single Phase
DIMENSIONS	900 x 750 x 1350mm high
WEIGHT	221kg
DISPLAY SURFACE	1.48m ²
SHELF DIMENSIONS	(3x) 795 x 345mm (1x) 900 x 740mm

ORDER CODE

DCG/WDF097ZSA11



REFRIGERATED DISPLAY CABINETS

LOW CUBE

Galileo



FEATURES

- Stainless steel decorative front panel
- Fitted with a SECOP compressor
- Electric heating front glass for de-fogging
- Fitted with removable, sliding glass doors
- Fitted with adjustable feet
- LED lighting under each shelf - Energy saving
- Fitted with a Dixell electronic controller
- Automatic defrost function
- Supplied with 2 adjustable stainless steel shelves

1.2 METER

SPECIFICATIONS

MODEL Galileo WDF127F
ELECTRICITY 0.7kW, 220V, Single Phase
DIMENSIONS 1200 x 750 x 1200mm high
WEIGHT 243kg
DISPLAY SURFACE 1.64m²
SHELF DIMENSIONS (2x) 1095 x 345mm
(1x) 1200 x 740mm
TEMP RANGE 2 ~ 8°C
REFRIGERANT GAS R290

ORDER CODE

DCG/WDF127F



0.9 METER

SPECIFICATIONS

MODEL Galileo WDF097F
ELECTRICITY 0.51kW, 220V, Single Phase
DIMENSIONS 900 x 750 x 1200mm high
WEIGHT 200kg
DISPLAY SURFACE 1.2m²
SHELF DIMENSIONS (2x) 795 x 345mm
(1x) 900 x 740mm
TEMP RANGE 2 ~ 8°C
REFRIGERANT GAS R290

ORDER CODE

DCG/WDF097F



DIXELL CONTROLLER



STAINLESS STEEL SHELVES

REFRIGERATED DISPLAY CABINETS COUNTER TOP

Galileo



FEATURES

- Stainless steel exterior & interior
- Removable water pan to add humidity
- Fitted with an electronic digital controller
- (2x) stainless steel shelves standard
- Maintains temperatures between 2°C ~ 8°C
- (2x) rear sliding glass doors
- LED interior lighting - Energy saving and durable
- Fitted with (4x) leveling feet

0.9 METER

SPECIFICATIONS

MODEL	Galileo WTF160L
ELECTRICITY	0.24kW, 220V, Single Phase
DIMENSIONS	900 x 560 x 670mm high
WEIGHT	75kg
DISPLAY SURFACE	1.07m ²
SHELF DIMENSIONS	(1x) 850 x 288mm (1x) 850 x 338mm (1x) 850 x 640mm
TEMP RANGE	2 ~ 8°C
REFRIGERANT GAS	R290

ORDER CODE

DCG/WTF160L



0.7 METER

SPECIFICATIONS

MODEL	Galileo WTF120L
ELECTRICITY	0.23kW, 220V, Single Phase
DIMENSIONS	700 x 560 x 670mm high
WEIGHT	65kg
DISPLAY SURFACE	0.67m ²
SHELF DIMENSIONS	(1x) 650 x 288mm (1x) 650 x 338mm (1x) 650 x 400mm
TEMP RANGE	2 ~ 8°C
REFRIGERANT GAS	R290

ORDER CODE

DCG/WTF120L



HEATED DISPLAY CABINETS COUNTER TOP



FEATURES

- Stainless steel exterior & interior
- Removable water pan to add humidity
- Fitted with an electronic digital controller
- (3x) stainless steel shelves standard
- Maintains temperatures between 30°C ~ 90°C
- (2x) rear sliding glass doors
- LED interior lighting - Energy saving and durable
- Fitted with (4x) leveling feet

0.9 METER

SPECIFICATIONS

MODEL	Galileo WHF200L
ELECTRICITY	1.65kW, 220V, Single Phase
DIMENSIONS	900 x 570 x 678mm high
WEIGHT	70kg
DISPLAY SURFACE	0.86m ²
SHELF DIMENSIONS	(3x) 850 x 338mm
TEMP RANGE	30 ~ 90°C

ORDER CODE

DCG/WHF200L



0.7 METER

SPECIFICATIONS

MODEL	Galileo WHF150L
ELECTRICITY	1.25kW, 220V, Single Phase
DIMENSIONS	700 x 570 x 678mm high
WEIGHT	60kg
DISPLAY SURFACE	0.66m ²
SHELF DIMENSIONS	(3x) 650 x 338mm
TEMP RANGE	30 ~ 90°C

ORDER CODE

DCG/WHF150L



FEATURES

- Internal heated / cooling aggregate
- Front panel manufactured from stainless steel
- 2 Glass shelves with height and angle adjustable frames
- Internal top and each shelf illuminated with LED lights
- Electronic temperature controller with digital display
- External housing manufactured stainless steel
- Glass side panels
- Back sliding doors with combined glass
- Automatic defrost on refrigerated units
- Fitted with height adjustable feet



REFRIGERATED DISPLAY CABINETS

1.3 METER

SPECIFICATIONS

MODEL	Igloo Cube 1.3
ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	1310 x 840 x 1250 mm high
WEIGHT	210kg
DISPLAY SURFACE	1.9m ²
SHELF DIMENSIONS	(1x) 1280 x 425mm (1x) 1280 x 515mm (1x) 1290 x 525mm
TEMP RANGE	5 ~ 15°C
REFRIGERANT GAS	R134a

ORDER CODE

IGL8013



0.9 METER

SPECIFICATIONS

MODEL	Igloo Cube 0.9
ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	910 x 840 x 1250mm high
WEIGHT	170kg
DISPLAY SURFACE	1.3m ²
SHELF DIMENSIONS	(1x) 870 x 425mm (1x) 870 x 515mm (1x) 880 x 525mm
TEMP RANGE	5 ~ 15°C
REFRIGERANT GAS	R134a

ORDER CODE

IGL8009



0.6 METER

SPECIFICATIONS

MODEL	Igloo Cube 0.6
ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	610 x 840 x 1250mm high
WEIGHT	120kg
DISPLAY SURFACE	0.87m ²
SHELF DIMENSIONS	(1x) 570 x 425mm (1x) 570 x 515mm (1x) 580 x 525mm
TEMP RANGE	5 ~ 15°C
REFRIGERANT GAS	R134a

ORDER CODE

IGL8006





HEATED DISPLAY CABINETS

1.3 METER SPECIFICATIONS

MODEL	Igloo Cube 1.3
ELECTRICITY	3kW, 230V, Single Phase
DIMENSIONS	1310 x 840 x 1250 mm high
WEIGHT	220kg
DISPLAY SURFACE	1.9m ²
SHELF DIMENSIONS	(1x) 1280 x 425mm (1x) 1280 x 515mm (1x) 1290 x 525mm
TEMP RANGE	30 ~ 60°C

ORDER CODE

IGL8113



0.9 METER SPECIFICATIONS

MODEL	Igloo Cube 0.9
ELECTRICITY	3kW, 220V, Single Phase
DIMENSIONS	910 x 840 x 1250mm high
WEIGHT	170kg
DISPLAY SURFACE	1.3m ²
SHELF DIMENSIONS	(1x) 870 x 425mm (1x) 870 x 515mm (1x) 880 x 525mm
TEMP RANGE	30 ~ 60°C

ORDER CODE

IGL8109



0.6 METER SPECIFICATIONS

MODEL	Igloo Cube 0.6
ELECTRICITY	3kW, 220V, Single Phase
DIMENSIONS	610 x 840 x 1250mm high
WEIGHT	120kg
DISPLAY SURFACE	0.87m ²
SHELF DIMENSIONS	(1x) 570 x 425mm (1x) 570 x 515mm (1x) 580 x 525mm
TEMP RANGE	30 ~ 60°C

ORDER CODE

IGL8106



NEUTRAL DISPLAY CABINETS

0.9 METER SPECIFICATIONS

MODEL	Igloo Cube 0.9
ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	910 x 840 x 1250mm high
WEIGHT	160kg
DISPLAY SURFACE	1.3m ²
SHELF DIMENSIONS	(1x) 870 x 425mm (1x) 870 x 515mm (1x) 880 x 525mm

ORDER CODE

IGL8209




0.6 METER SPECIFICATIONS

MODEL	Igloo Cube 0.6
ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	610 x 840 x 1250mm high
WEIGHT	110kg
DISPLAY SURFACE	0.87m ²
SHELF DIMENSIONS	(1x) 570 x 425mm (1x) 570 x 515mm (1x) 580 x 525mm

ORDER CODE

IGL8206

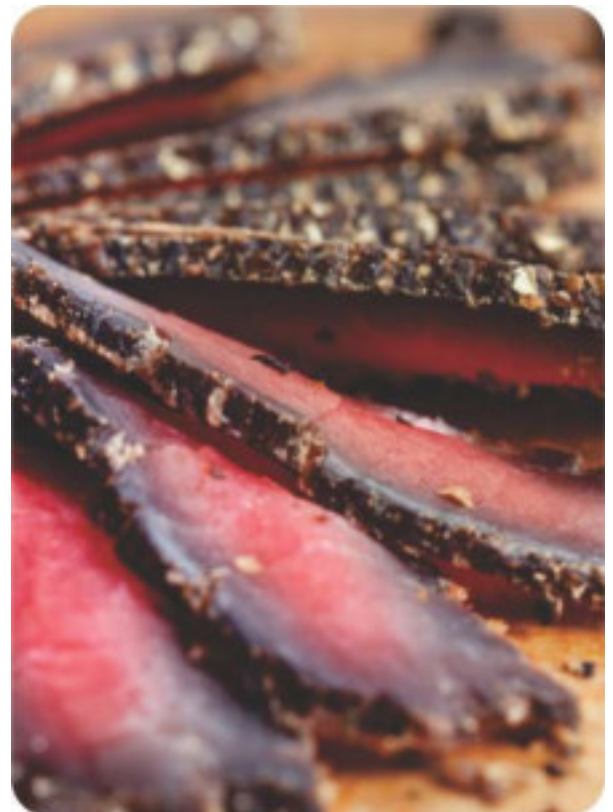

FEATURES

- Internal heated / cooling aggregate
- Front panel manufactured from stainless steel
- Glass side panel
- Back sliding doors with combined glass
- Automatic defrost on refrigerated unit
- Fitted with height adjustable feet
- External housing manufactured from stainless steel
- 3 Glass shelves with height and angle adjustable frames
- Internal top and each shelf illuminated with LED lights
- Electronic temperature controller with digital display
- High displays also available in self-help units with doors on both sides



REFRIGERATED DISPLAY CABINETS

1.3 METER SPECIFICATIONS

MODEL	Igloo Cube 1.3 H
ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	1310 x 840 x 1380mm high
WEIGHT	230kg
DISPLAY SURFACE	2.3m ²
SHELF DIMENSIONS	(1x) 1280 x 345mm (1x) 1280 x 425mm (1x) 1280 x 515mm (1x) 1290 x 525mm
TEMP RANGE	5 ~ 15°C
REFRIGERANT GAS	R134a

ORDER CODE IGL8013-H



0.9 METER SPECIFICATIONS

MODEL	Igloo Cube 0.9 H
ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	910 x 840 x 1380mm high
WEIGHT	130kg
DISPLAY SURFACE	1.6m ²
SHELF DIMENSIONS	(1x) 870 x 345mm (1x) 870 x 425mm (1x) 870 x 515mm (1x) 880 x 525mm
TEMP RANGE	5 ~ 15°C
REFRIGERANT GAS	R134a

ORDER CODE IGL8009-H



HEATED DISPLAY CABINETS

1.3 METER

SPECIFICATIONS

MODEL	Igloo Cube 1.3 H
ELECTRICITY	3kW, 220V, Single Phase
DIMENSIONS	1310 x 840 x 1380mm high
WEIGHT	230kg
DISPLAY SURFACE	2.3m ²
SHELF DIMENSIONS	(1x) 1280 x 345mm (1x) 1280 x 425mm (1x) 1280 x 515mm (1x) 1290 x 525mm
TEMP RANGE	30 ~ 60°C

ORDER CODE

IGL8113-H



0.9 METER

SPECIFICATIONS

MODEL	Igloo Cube 0.9 H
ELECTRICITY	3kW, 220V, Single Phase
DIMENSIONS	910 x 840 x 1380mm high
WEIGHT	130kg
DISPLAY SURFACE	1.6m ²
SHELF DIMENSIONS	(1x) 870 x 345mm (1x) 870 x 425mm (1x) 870 x 515mm (1x) 880 x 525mm
TEMP RANGE	30 ~ 60°C

ORDER CODE

IGL8109-H



0.9 METER - SELF HELP

SPECIFICATIONS

MODEL	Igloo Cube 0.9 H/SH
ELECTRICITY	3kW, 220V, Single Phase
DIMENSIONS	910 x 840 x 1380mm high
WEIGHT	180kg
DISPLAY SURFACE	1.6m ²
SHELF DIMENSIONS	(1x) 870 x 345mm (1x) 870 x 425mm (1x) 870 x 515mm (1x) 880 x 525mm
TEMP RANGE	30 ~ 60°C

ORDER CODE

IGL8109-SH/H



NEUTRAL DISPLAY CABINETS

0.9 METER

SPECIFICATIONS

MODEL	Igloo Cube 0.9 H
ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	910 x 840 x 1380mm high
WEIGHT	120kg
DISPLAY SURFACE	1.6m ²
SHELF DIMENSIONS	(1x) 870 x 345mm (1x) 870 x 425mm (1x) 870 x 515mm (1x) 880 x 525mm

ORDER CODE

IGL8209-H



0.9 METER - SELF HELP

SPECIFICATIONS

MODEL	Igloo Cube 0.9 H/SH
ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	910 x 840 x 1380mm high
WEIGHT	170kg
DISPLAY SURFACE	1.6m ²
SHELF DIMENSIONS	(1x) 870 x 345mm (1x) 870 x 425mm (1x) 870 x 515mm (1x) 880 x 525mm


ORDER CODE

IGL8209-SH/H



FEATURES

- Straight front, top and side glass
- Optional self help front glass available
- Illuminated by LED lighting below top glass
- Designed to be fitted on counter top (not on appliance)

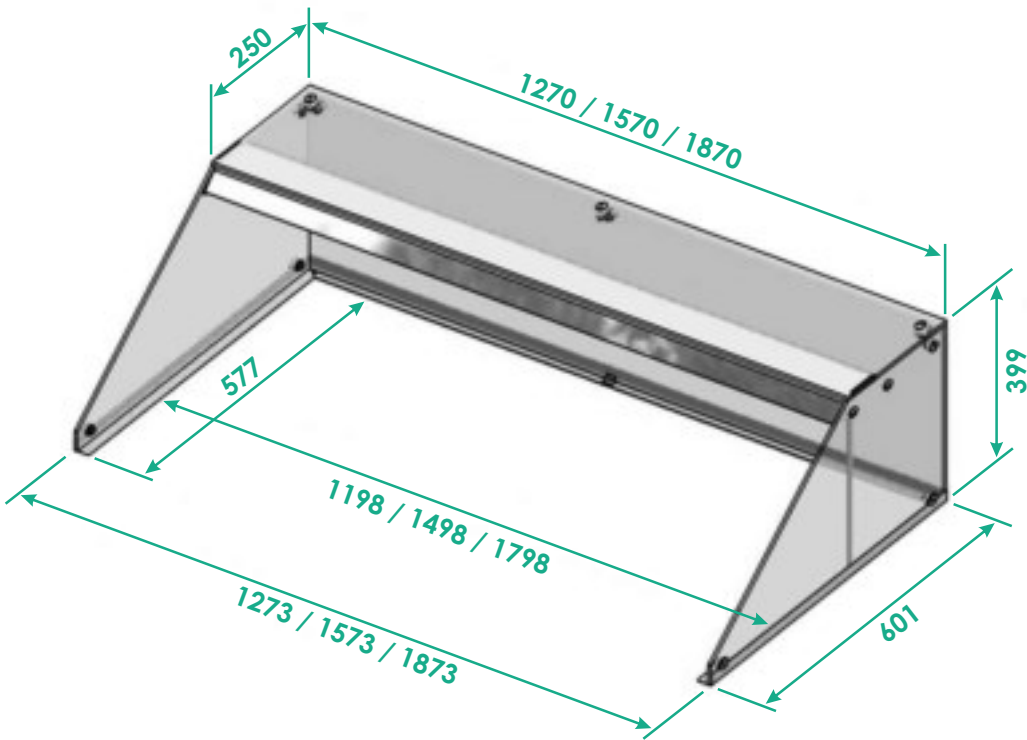

SQUARE GLASS 1800mm

SPECIFICATIONS

MODEL	Igloo Gastroline
ELECTRICITY	220V, Single Phase
DIMENSIONS	1800 x 600 x 400mm high
WEIGHT	40kg
CUT SIZE	1800 x 660mm

ORDER CODE IGL8818

SELF HELP FRONT GLASS 1800mm

ORDER CODE IGL8818-SH

SQUARE GLASS 1500mm

SPECIFICATIONS

MODEL	Igloo Gastroline
ELECTRICITY	220V, Single Phase
DIMENSIONS	1500 x 600 x 400mm high
WEIGHT	35kg
CUT SIZE	1500 x 660mm

ORDER CODE IGL8815

SQUARE GLASS 1200mm

SPECIFICATIONS

MODEL	Igloo Gastroline
ELECTRICITY	220V, Single Phase
DIMENSIONS	1200 x 600 x 400mm high
WEIGHT	30kg
CUT SIZE	1200 x 660mm

ORDER CODE IGL8812

SELF HELP FRONT GLASS 1200mm

ORDER CODE IGL8812-SH



FEATURES

- Internal cooling aggregate
- Ecological polyurethane foam insulation
- Fitted with night roller blind
- ABS side panels with glass thickness 40mm
- Automatic defrost
- Fitted with device levelling legs
- Dynamic cooling (ventilated)
- Internal top illuminated - LED light (white colour)
- Exposition shelves with height and angle adjustment
- Electronic temperature controller with digital display
- Condenser impurity or fan operation failure alarm
- Available in black or stainless steel models



2.5 METER

SPECIFICATIONS

MODEL Igloo Paros 2.5
ELECTRICITY 1.8kW, 220V, Single Phase
DIMENSIONS 2540 x 695 x 2020mm high
WEIGHT 340kg
DISPLAY SURFACE 4.5m²
SHELF DIM (8x) 1280 x 345mm
(1x) 2460 x 425mm
TEMP RANGE 3 ~ 10°C
REFRIGERANT GAS R404a

STAINLESS STEEL

IGL9025



1.9 METER

SPECIFICATIONS

MODEL Igloo Paros 1.9
ELECTRICITY 1.4kW, 220V, Single Phase
DIMENSIONS 1910 x 695 x 2020mm high
WEIGHT 290kg
DISPLAY SURFACE 3.4m²
SHELF DIM (4x) 1800 x 360mm
(1x) 1800 x 440mm
TEMP RANGE 3 ~ 10°C
REFRIGERANT GAS R134a

STAINLESS STEEL

IGL9019



1.3 METER

SPECIFICATIONS

MODEL Igloo Paros 1.3
ELECTRICITY 1.13kW, 220V, Single Phase
DIMENSIONS 1310 x 695 x 2020mm high
WEIGHT 190kg
DISPLAY SURFACE 2.2m²
SHELF DIM (4x) 1200 x 360mm
(1x) 1200 x 440mm
TEMP RANGE 3 ~ 10°C
REFRIGERANT GAS R134a

STAINLESS STEEL
BLACK

IGL9013
IGL9013-B



1 METER

SPECIFICATIONS

MODEL Igloo Paros 1.0
ELECTRICITY 1.1kW, 220V, Single Phase
DIMENSIONS 1010 x 695 x 2020mm high
WEIGHT 160kg
DISPLAY SURFACE 1.7m²
SHELF DIM (4x) 900 x 360mm
(1x) 900 x 440mm
TEMP RANGE 3 ~ 10°C
REFRIGERANT GAS R134a

STAINLESS STEEL
BLACK

IGL9010
IGL9010-B





FEATURES

- Internal cooling aggregate
- Dynamic cooling temperature range 2°C ~ 10°C
- Glass exposition shelves
- Ecological polyurethane foam insulation
- Side glass with silk screen printing
- External housing, interior and frame made of powder painted steel
- Upper interior lighting + additional illumination of each shelf - *LED lights (confectionery color)*
- Automatic defrost
- Automatic condenser vaporization
- Electronic temperature controller with digital display (IGLOO)
- Condenser impurity or fan operation failure alarm
- External housing made of stainless steel
- Interior and frame made of stainless steel sheet
- Exposition shelves on frame made of powder painted steel
- Exposition shelves on frame made of stainless steel
- Electronic temperature recorder + software
- Temperature recorder wire (RS232 USB)



 REFRIGERATED MERCHANDISERS



0.9 METER

SPECIFICATIONS

MODEL	Igloo Petro Select PR101S
ELECTRICITY	0.76kW, 220V, Single Phase
DIMENSIONS	900 x 725 x 1400mm high
WEIGHT	170kg
DISPLAY SURFACE	1.2m ²
TEMP RANGE	2 ~ 10°C
REFRIGERANT	R134a

ORDER CODE IGL3009



0.6 METER

SPECIFICATIONS

MODEL	Igloo Petro Select PR100S
ELECTRICITY	0.35kW, 230V, Single Phase
DIMENSIONS	600 x 725 x 1400mm high
WEIGHT	125kg
DISPLAY SURFACE	0.8m ²
TEMP RANGE	2 ~ 10°C
REFRIGERANT	R134a

ORDER CODE IGL3006



 90° NEUTRAL CORNER UNITS



LEFT

SPECIFICATIONS

MODEL	Igloo Petro PRSNZ90NL
DIMENSIONS	425 x 725 x 1400mm high
WEIGHT	30kg
DISPLAY SURFACE	0.6m ²

ORDER CODE IGL3001



RIGHT

SPECIFICATIONS

MODEL	Igloo Petro PRSNZ90NP
DIMENSIONS	425 x 725 x 1400mm high
WEIGHT	30kg
DISPLAY SURFACE	0.6m ²

ORDER CODE IGL3002

ICE CREAM SCOOP FREEZERS TABLE MODEL

Galileo

FEATURES

- Stainless steel exterior and interior finish with tempered glass
- Fan assisted cooling
- Digital controller and temperature display
- Removable sliding door for easy cleaning
- Fully automatic
- Fan assisted condenser
- Interior LED light with switch
- Removable door gasket



5 DIVISION

SPECIFICATIONS

MODEL	Galileo TSF-120
ELECTRICITY	0.75kW, 230V, Single Phase
DIMENSIONS	1200 x 550 x 790mm high
WEIGHT	140kg
CAPACITY	(5x) 1/3 GN inserts - 100mm
TEMPERATURE RANGE	-18 ~ -12°C
REFRIGERANT GAS	R404A

ORDER CODE

IFG/TSF-120



3 DIVISION

SPECIFICATIONS

MODEL	Galileo TSF-90
ELECTRICITY	0.65kW, 230V, Single Phase
DIMENSIONS	900 x 550 x 790mm high
WEIGHT	120kg
CAPACITY	(3x) 1/3 GN inserts - 100mm
TEMPERATURE RANGE	-18 ~ -12°C
REFRIGERANT GAS	R404A

ORDER CODE

IFG/TSF-90



FEATURES

- Compact design to minimize footprint
- Low maintenance auto defrost function
- Fitted with digital temperature controller
- Glass panels are easy to remove for cleaning
- Can accommodate 1/4 and 1/2 GN pans
- GN pans not included



8 DIVISION 1/4 GN

SPECIFICATIONS

MODEL	PolarCab ESL 3888
ELECTRICITY	3kW, 230V, Single Phase
DIMENSIONS	1805 x 395 x 420mm high
WEIGHT	53kg
CAPACITY	(8x) 1/4 GN pans (4x) 1/2 GN pans
TEMP RANGE	2 ~ 8°C
REFRIGERANT GAS	R134a

ORDER CODE

PCY/ESL3888



6 DIVISION 1/4 GN

SPECIFICATIONS

MODEL	PolarCab ESL 3861
ELECTRICITY	3kW, 230V, Single Phase
DIMENSIONS	1405 x 395 x 465mm high
WEIGHT	41kg
CAPACITY	(6x) 1/4 GN pans (3x) 1/2 GN pans
TEMP RANGE	2 ~ 8°C
REFRIGERANT GAS	R134a

ORDER CODE

PCY/ESL3861



FEATURES

- Powder coated stainless steel exterior
- Front and rear sliding doors provide quick, easy access
- Internal lighting
- Front mounted temperature gauge for monitoring temperature
- Thermostatically controlled heater
- 430 Grade stainless steel interior and shelving racks
- Glass side panels for optimum display
- Humidity pan prevents drying out
- Adjustable shelves
- Fitted with (4x) non-slip feet



900mm

SPECIFICATIONS

MODEL	SmartChef HW-60-2
ELECTRICITY	1.84kW, 220V, Single Phase
DIMENSIONS	900 x 480 x 610mm high
WEIGHT	50kg
TEMP RANGE	50 ~ 90°C
SHELF DIMENSIONS	(3x) 815 x 360mm

ORDER CODE

PWS0002



660mm

SPECIFICATIONS

MODEL	SmartChef HW-60-1
ELECTRICITY	1.84kW, 220V, Single Phase
DIMENSIONS	660 x 480 x 610mm high
WEIGHT	33kg
TEMP RANGE	50 ~ 90°C
SHELF DIMENSIONS	(3x) 575 x 360mm

ORDER CODE

PWS0001

FEATURES

- Manufactured from 430 Grade stainless steel
- Internal lighting
- Adjustable shelves
- Thermostatically controlled heater
- Front sliding glass doors
- Humidity pan prevents drying out
- Front mounted temperature gauge for monitoring temperature
- Fitted with (4x) non-slip feet



640mm

SPECIFICATIONS

MODEL	SmartChef HW-580
ELECTRICITY	1kW, 220V, Single Phase
DIMENSIONS	640 x 360 x 530mm high
WEIGHT	45kg
TEMP RANGE	50 ~ 90°C
SHELF DIMENSIONS	(4x) 565 x 300mm

ORDER CODE

PWS0004



Galileo



Elegant Retail Display Cabinets

FURMIS



SUPERIOR
pizza and meal
delivery bags



SECTION INDEX

Baking trolleys	184
Beverage containers	177
CamTrays	173
Cleaning trolleys	115
Delivery bags	174-175
Delivery boxes	176
Food pan carriers	177-180
Food serving carts	172
GoBoxes	179-180
Insulated bases & domes	173
Insulated meal delivery system	173
Meal delivery bags	174-175
Meal delivery boxes	176
Meal delivery carts	170-171
Pizza delivery bags	174-175
Rack trolleys	184-185
Serving trays	173
Tea trolleys	182-183
Tray clearing trolleys	181





FEATURES

- Thick, high quality CFC-free foam insulation protects hot or cold meals
- Designed from one-piece double wall polyethylene for durability
- Lightweight doors open a full 270° for fast, quiet access to trays
- Molded-in rails spaced 127mm ensure quiet meal delivery
- Heavy duty nylon handles securely mounted on each end
- Five menu clips hold routing directions or content lists
- Fitted with stainless steel door latches
- Rust, dent, crack, chip, and break resistant
- Non-electric and requires no assembly
- Fitted with 6 heavy duty nylon casters (2 rigid, 4 swivel with brake)

30 TRAY

SPECIFICATIONS

MODEL	CAMBRO MDC1520T30
DIMENSIONS	1524 x 743 x 1616mm high
INTERIOR DIMENSIONS	(3x) 390 x 533 x 1270mm high
WEIGHT	95kg
COMPARTMENTS	3
RAIL SPACING	127mm
CAPACITY	(30x) 380 x 515mm trays

ORDER CODE

CAM-MDC1520T30



HEAVY DUTY NYLON HANDLES



SECURITY DOOR LATCHES



SMOOTH RUNNING CASTORS

FEATURES

- Holds multiple trays of plated food
- Hidden friction catch on each door for easy closing
- Molded in handles on each end for smooth transporting
- Easy to clean and won't rust, dent, crack, chip or break
- Fitted with 5 sets of rails per compartment – Fits 2 trays per rail
- Rail spacing holds all standard tray set-ups with clearances up to 140mm high
- Two castor configuration offer excellent stability and smooth transporting
- Camtrays not included
- Made of tough, one-piece, double-wall polyethylene
- Two internal nylon friction latches
- Menu clip on each door reduces need to open door



20 TRAY

SPECIFICATIONS

MODEL	Cambro MDC1520S20
DIMENSIONS	1400 x 965 x 1125mm high
INTERNAL DIMENSIONS	(2x) 520 x 770 x 700mm high
WEIGHT	71kg
COMPARTMENTS	2
RAIL SPACING	139mm
CAPACITY	(20x) Trays (10x) Trays per compartment (2x) Trays per rail

ORDER CODE

CAM-MDC1520S20



10 TRAY

SPECIFICATIONS

MODEL	Cambro MDC1520S10
DIMENSIONS	750 x 980 x 1080mm high
WEIGHT	40kg
INTERNAL DIMENSIONS	535 x 787 x 670mm high
COMPARTMENTS	1
RAIL SPACING	133mm
CAPACITY	(10x) Trays (2x) Trays per rail

ORDER CODE

CAM-MDC1520S10





FEATURES

- Constructed from light weight material
- Fitted with push handles
- Fitted with heavy duty swivel castors, 2 with brakes
- Modular design for east replacement in case of damaged parts
- Fitted with removable latched doors

24 TRAY TROLLEY

SPECIFICATIONS

MODEL	TrayPort 1100-T3D-39
DIMENSIONS	1500 x 750 x 1250mm high
WEIGHT	60kg
CAPACITY	(3x) 8 Trays
TRAY SIZE	380 x 525mm (Tuff Tray No.14) 380 x 515mm (Camtray 1520)
RUNNER SPACE	120mm

ORDER CODE PLA-1100-T3D-39



16 TRAY TROLLEY

SPECIFICATIONS

MODEL	TrayPort 1100-D3D-39
DIMENSIONS	1000 x 750 x 1250mm high
WEIGHT	40kg
CAPACITY	(2x) 8 Trays
TRAY SIZE	380 x 525mm (Tuff Tray No.14) 380 x 515mm (Camtray 1520)
RUNNER SPACE	120mm

ORDER CODE PLA-1100-D3D-39



8 TRAY TROLLEY

SPECIFICATIONS

MODEL	TrayPort 1100-S3D-39
DIMENSIONS	500 x 750 x 1250mm high
WEIGHT	20kg
CAPACITY	8 Trays
TRAY SIZE	380 x 525mm (Tuff Tray No.14) 380 x 515mm (Camtray 1520)
RUNNER SPACE	120mm

ORDER CODE PLA-1100-S3D-39





INSULATED DOME COVERS

DIMENSIONS 260 x 70mm high
INTERNAL HEIGHT 50mm
ORDER CODE CAM-MDSLD9

INSULATED BASE

INSULATED BASE FOR 23cm PLATE
ORDER CODE CAM-HK39B

CAMTRAYS

DIMENSIONS 355 x 457mm
ORDER CODE CAM-1418

DIMENSIONS 380 x 510mm
ORDER CODE CAM-1520



**NON-SLIP
SURFACE**

FEATURES

- Manufactured from durable, easy washable Nylon material
- Patented 'CLICKBYCLICK' closing system based on plates and magnets sewn into the bag
- Fitted with side pockets for drinks
- Fitted with a transparent pocket for bills
- Stiffening frame and 12V heating pad available as optional extras



8 x PIZZA BAG SPECIFICATIONS

MODEL	Furmis T8S
DIMENSIONS	400 x 400 x 420mm high
INTERNAL DIMENSIONS	360 x 360 x 400mm high
CAPACITY	(8x) 350 x 350mm boxes

ORDER CODE **FUR-T8S-NM**



4 x PIZZA BAG SPECIFICATIONS

MODEL	Furmis T4S
DIMENSIONS	400 x 400 x 250mm high
INTERNAL DIMENSIONS	360 x 360 x 210mm high
CAPACITY	(4x) 350 x 350mm boxes

ORDER CODE **FUR-T4S-NM**

OPTIONAL EXTRAS




12V HEATING PAD SPECIFICATIONS

MODEL	Furmis HP-TS
ELECTRICITY	12V

ORDER CODE **FUR-HP-TS**

**Supplied with 2.5m power cord*

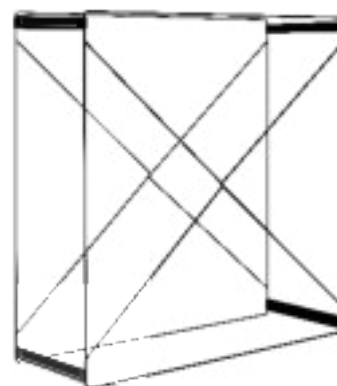

STIFFENING FRAME FOR T8S ORDER CODE **FUR-T8S-FRAME**

STIFFENING FRAME FOR T4S ORDER CODE **FUR-T4S-FRAME**

FEATURES

- Manufactured from durable, easy washable Nylon material
- Patented 'CLICKBYCLICK' closing system based on plates and magnets sewn into the bag
- Stiffened bottom
- Fitted with side pockets for drinks
- Fitted with a transparent pocket for bills



12 x MEAL BAG
SPECIFICATIONS

MODEL Furmis LUNCHBOX-12
DIMENSIONS 540 x 470 x 270mm high
INTERNAL DIMENSIONS 520 x 450 x 250mm high
CAPACITY (12x) 200 x 250mm containers

ORDER CODE FUR-LB12-NM



6 x MEAL BAG
SPECIFICATIONS

MODEL Furmis LUNCHBOX-6
DIMENSIONS 450 x 300 x 320mm high
INTERNAL DIMENSIONS 420 x 270 x 290mm high
CAPACITY (6x) 200 x 250mm containers

ORDER CODE FUR-LB6-NM

ECONO PIZZA BAG

FEATURES

- Manufactured from durable, easy washable Nylon material
- Fitted with a transparent pocket for bills
- Velcro closing system
- Fitted with side pockets for drinks



4 x MEAL BAG
SPECIFICATIONS

MODEL Furmis ECO S
DIMENSIONS 400 x 400 x 240mm high
INTERNAL DIMENSIONS 370 x 370 x 220mm high
CAPACITY (4x) 350 x 350mm containers

ORDER CODE FUR-ECO-S

FEATURES

- Manufactured from lightweight, odorless, non-toxic plastic
- Durable & long-lasting
- Perfect heat insulation keeps products warm for longer
- The cover is fitted with hydraulic arms for easy loading and unloading
- Fitted with a durable safety latch to ensure that the lid remains sealed
- Fitted with durable hinges
- Easily to clean
- Specially designed to be fitted on most motorcycle brands
- The product increases your prestige in front of the customer during service



PIZZA BOX (FRONT LOADING)

SPECIFICATIONS

MODEL	Avatherm AVA-100305
OUTER DIMENSIONS	600 x 460 x 375mm high
INNER DIMENSIONS	460 x 460 x 330mm high
VOLUME	70Lt
WEIGHT	7.2kg

ORDER CODE AVA-100305



THERMOBOX 640 (TOP LOADING)

SPECIFICATIONS

MODEL	Avatherm AVA-100275
OUTER DIMENSIONS	600 x 470 x 375mm high
INNER DIMENSIONS	530 x 380 x 270mm high
VOLUME	54Lt
WEIGHT	6.6kg

ORDER CODE AVA-100275



FEATURES

- Holds multiple pans of hot or cold food for up to 4 hours
- Door removes for easy cleaning
- Menu clip reduces need to open door
- Built-in seal eliminates need for removable gasket
- 'Sta-Stack' interlocking ensures stable stacking during transport and storage
- Durable polyethylene shell and thick polyurethane foam insulation
- Integrated pan-staging area eases service
- Robust, molded-in handles for comfortable two-person carrying
- Single 23cm nylon latch for quick and secure opening and closing



6 PAN FRONT LOADING

SPECIFICATIONS

MODEL	Cambro Ultra Camcart UPC400
DIMENSIONS	425 x 620 x 570mm high
WEIGHT	16kg
INTERNAL DIMENSIONS	340 x 535 x 360mm high
CAPACITY	(6x) 65mm deep 1/1 GN pans (4x) 100mm deep 1/1 GN pans (3x) 150mm deep 1/1 GN pans (2x) 200mm deep 1/1 GN pans Also holds 1/2 and 1/3 GN pans

ORDER CODE

CAM-UPC400

INSULATED BEVERAGE CONTAINERS

FEATURES

- Use to hold, transport and serve hot or cold beverages
- One piece, seamless double-wall polyethylene with thick foam insulation
- Wide nylon latches secure lids tightly to prevent spillage and will never rust
- Drip-proof recessed faucet accommodates larger cups and bowls for easy self-serve access
- Two position faucet - One for continuous pouring and one for individual dispensing
- Fitted with vent cap to equalise pressure for easy opening
- "Sta-Stack" interlocking ensures stable stacking during transport and storage



20 LITRE

SPECIFICATIONS


MODEL	Cambro Ultra Container UC500
DIMENSIONS	425 x 300 x 680mm high
WEIGHT	9kg
CAPACITY	19.9Lt (96x) 210ml cups

ORDER CODE


CAM-UC500



Hot



Cold



10 LITRE

SPECIFICATIONS

MODEL	Cambro Ultra Container UC250
DIMENSIONS	425 x 300 x 500mm high
WEIGHT	7kg
CAPACITY	10.4Lt (50x) 210ml cups

ORDER CODE

CAM-UC250





FEATURES

- Double walled and internally foamed with CFC-Free polyurethane, providing optimum insulation with high resistance
- Fulfill all requirements of the food hygiene regulation
- Easy stackable for transport allowing for the multiple distribution of goods
- Side handles provide a convenient reliable and highly accessible means of transportation
- Its highly accessible design makes it easy to clean
- Integrated menu card holder
- GN Pans not included



6 PAN FRONT LOADING

SPECIFICATIONS



MODEL	Avatherm 601 M
DIMENSIONS	450 x 625 x 575mm high
WEIGHT	10kg
INTERNAL DIMENSIONS	330 x 540 x 460mm high
LOAD CAPACITY	(6x) 65mm deep 1/1 GN pans (4x) 100mm deep 1/1 GN pans (3x) 150mm deep 1/1 GN pans Also holds 1/2 & 1/3 GN pans

ORDER CODE 
ORDER CODE 

AVA-100155-HD
AVA-100160-HD



LOADING EXAMPLE

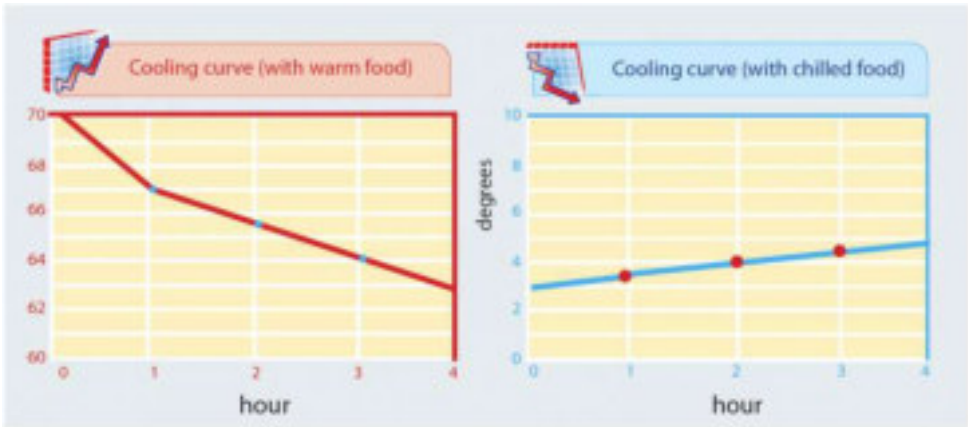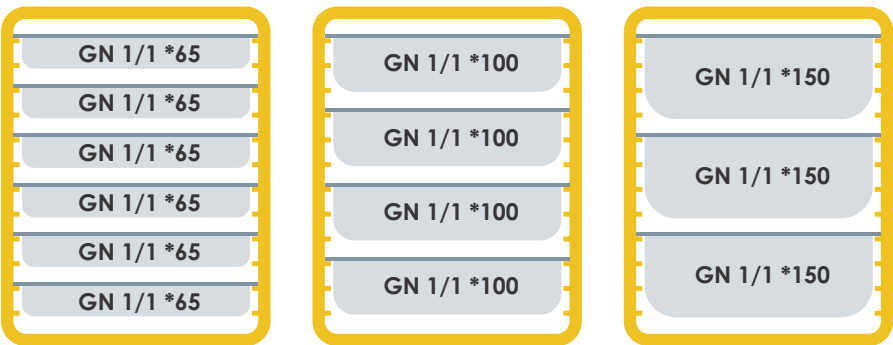

FEATURES

- Manufactured from CFC-free expanded polypropylene material
- Fits GN1/1, GN1/2 and GN1/3 containers
- Ergonomic handles for easy lifting and storage
- Door opens to allow 270° access for fast and safe service
- Stackable with other GoBoxes
- Withstands temperatures of -40°C to 120°C
- 100% Recyclable
- No electricity needed, goes anywhere!
- Weighs less than 4kg when empty
- Fitted with heavy duty door latches
- Resistant to most oil, grease, and chemicals
- Impact resistant for safe transport
- Dishwasher safe



86 LITRE


SPECIFICATIONS

MODEL	GoBox EPP400
DIMENSIONS	640 x 440 x 625mm high
INTERIOR DIM.	535 x 330 x 525mm high
VOLUME	86Lt
WEIGHT	4kg
RUNNER SPACING	70mm

ORDER CODE

CAM-EPP400

EPP400

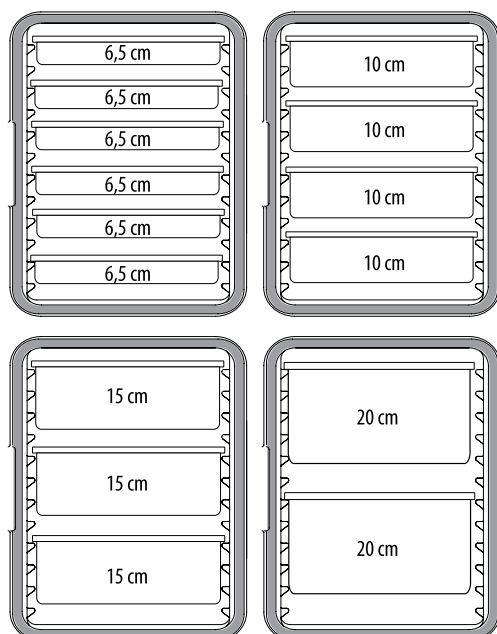

60 LITRE


SPECIFICATIONS

MODEL	GoBox EPP300
DIMENSIONS	640 x 440 x 475mm high
INTERIOR DIM.	535 x 330 x 370mm high
VOLUME	60Lt
WEIGHT	3kg
RUNNER SPACING	70mm

ORDER CODE

CAM-EPP300

EPP300

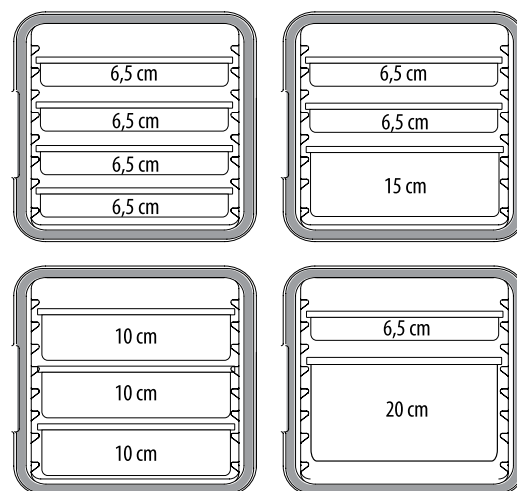

FEATURES

- Manufactured from CFC-free expanded polypropylene material
- Accommodates GN 1/1 containers
- Ergonomic handles for easy lifting and storage
- Stackable with other GoBoxes
- Withstands temperatures of -40°C to 120°C
- 100% Recyclable
- No electricity needed, goes anywhere!
- Weighs less than 2kg when empty
- Built in label area for menu tags
- Resistant to most oil, grease, and chemicals
- Impact resistant for safe transport
- Dishwasher safe



46 LITRE

SPECIFICATIONS

MODEL	GoBox EPP180
DIMENSIONS	600 x 400 x 316mm high
INTERIOR DIM.	538 x 338 x 253mm high
VOLUME	46Lt
WEIGHT	1.5kg

ORDER CODE

CAM-EPP180



35 LITRE

SPECIFICATIONS

MODEL	GoBox EPP160
DIMENSIONS	600 x 400 x 257mm high
INTERIOR DIM.	538 x 338 x 193mm high
VOLUME	35.5Lt
WEIGHT	1kg

ORDER CODE

CAM-EPP160

EPP180



EPP160



OPTIONAL EXTRAS



FEATURES

- Add 100mm extra height to top loading GoBox
- Fits - EPP180 and EPP160

GoBox TOP LOADER EXTENDER

SPECIFICATIONS

MODEL	CAMBRO EPPEXT
DIMENSIONS	399 x 594 x 99mm high
WEIGHT	0.24kg

ORDER CODE

CAM-EPPEXT



FEATURES

- Manufactured with durable plastic
- Plastic will not crack, dent, rust or corrode
- Features (4x) heavy duty casters - 2 lockable
- Suitable for use with front or top loading GoBox

GoBox DOLLIES

SPECIFICATIONS

MODEL	CAMBRO CD3253EPP
DIMENSIONS	400 x 600 x 170mm high
WEIGHT	4.5kg

ORDER CODE

CAM-CD3253EPP



FEATURES

- Constructed from light weight material
- Modular design for easy replacement in case of damaged parts
- Holds up to 30 trays
- Fitted with heavy duty swivel castors, 2 with brakes

30 TRAY TROLLEY

SPECIFICATIONS

MODEL	TrayPort 1150-D2-39
DIMENSIONS	1000 x 750 x 1750mm high
WEIGHT	37kg
CAPACITY	(2x) 15 Trays
TRAY SIZE	380 x 525mm (Tuff Tray No.14) 380 x 515mm (Camtray 1520)
RUNNER SPACING	100mm

ORDER CODE

PLA-1150-D2-39



15 TRAY TROLLEY

SPECIFICATIONS

MODEL	TrayPort 1150-S2-39
DIMENSIONS	500 x 750 x 1750mm high
WEIGHT	19kg
CAPACITY	15 Trays
TRAY SIZE	380 x 525mm (Tuff Tray No.14) 380 x 515mm (Camtray 1520)
RUNNER SPACING	100mm

ORDER CODE

PLA-1150-S2-39



STAINLESS STEEL TEA TROLLEYS



FEATURES

- Stainless steel tubular frame
- Easy to assemble
- Fitted with 100mm diameter swivel castors



3 TIER

SPECIFICATIONS

MODEL	SmartChef RPD-M3
DIMENSIONS	850 x 540 x 900mm high
WEIGHT	15kg
SHELF DIMENSIONS	(3x) 830 x 430mm high

ORDER CODE TTT1003



2 TIER

SPECIFICATIONS

MODEL	SmartChef RPD-M2
DIMENSIONS	850 x 540 x 900mm high
WEIGHT	13kg
SHELF DIMENSIONS	(2x) 830 x 430mm high

ORDER CODE TTT1002



DISH & TOTE HOLDER



SPECIFICATIONS

DIMENSIONS 500 x 400 x 130mm deep

ORDER CODE DTH0001



FEATURES

- Tiers manufactured from durable plastic
- Pillars manufactured from aluminium
- Light weight and soft in motion
- Easy to assemble
- Fitted with (4x) swivel castors

3 TIER - WITH BINS

SPECIFICATIONS

MODEL	SmartChef ACD-012A
DIMENSIONS	1030 x 510 x 1030mm high
WEIGHT	17kg
SHELF DIMENSIONS	(3x) 1000 x 500mm

ORDER CODE

TTP0001

3 TIER - NO BINS

SPECIFICATIONS

MODEL	SmartChef ACD-012A
DIMENSIONS	1030 x 510 x 1030mm high
WEIGHT	17kg
SHELF DIMENSIONS	(3x) 1000 x 500mm

ORDER CODE

TTP0000

OPTIONAL SIDE BINS



LARGE

SPECIFICATIONS

MODEL	SmartChef TTP0011
DIMENSIONS	330 x 240 x 560mm high

ORDER CODE

TTP0011

SMALL

SPECIFICATIONS

MODEL	SmartChef TTP0012
DIMENSIONS	330 x 240 x 170mm high

ORDER CODE

TTP0012





FEATURES

- Manufactured from high quality stainless steel
- Fitted with (4x) castors. 2 with brakes
- Assembly required (Supplied flat packed)

15 TIER BAKING TROLLEY

SPECIFICATIONS

MODEL	SmartChef BTT1-15-64
DIMENSIONS	470 x 620 x 1700mm high
WEIGHT	22kg
COMPATIBILITY	400 x 600mm baking trays
RUNNER SPACING	80mm

ORDER CODE

BTT1-15-64



7 TIER BAKING TROLLEY

SPECIFICATIONS

MODEL	SmartChef BTT1-7-64
DIMENSIONS	740 x 550 x 1700mm high
WEIGHT	13kg
COMPATIBILITY	400 x 600mm baking trays
RUNNER SPACING	220mm

ORDER CODE

BTT1-7-64



STAINLESS STEEL MULTI-FUNCTION RACK TROLLEY



FEATURES

- Manufactured from high quality stainless steel
- Shelf locking mechanisms on both openings
- Fitted with (4x) castors. 2 with brakes
- Assembly required (Supplied flat packed)

18 TIER RACK TROLLEY

SPECIFICATIONS

MODEL	SmartChef GNT1-18-16
DIMENSIONS	530 x 660 x 1740mm high
WEIGHT	29kg
COMPATIBILITY	1/1 GN Pans
RUNNER SPACING	400 x 600mm baking trays
	80mm

ORDER CODE

GNT1-18-16



**ACCOMMODATES GN PANS
& BAKING TRAYS**



FEATURES

- Manufactured from high quality stainless steel
- Shelf locking mechanisms on both openings
- Fitted with (4x) castors. 2 with brakes
- Assembly required (Supplied flat packed)

16 TIER DOUBLE RACK TROLLEY

SPECIFICATIONS

MODEL	SmartChef GNT2-16-11
DIMENSIONS	800 x 620 x 1705mm high
WEIGHT	33kg
COMPATIBILITY	1/1 GN Pans
RUNNER SPACING	80mm

ORDER CODE

GNT2-16-11



7 TIER DOUBLE RACK TROLLEY WITH WORK TOP

SPECIFICATIONS

MODEL	SmartChef GNT2-7-11
DIMENSIONS	740 x 550 x 950mm high
WEIGHT	24kg
COMPATIBILITY	1/1 GN Pans
RUNNER SPACING	80mm

ORDER CODE

GNT2-7-11



7 TIER RACK TROLLEY WITH WORK TOP

SPECIFICATIONS

MODEL	SmartChef GNT1-7-11
DIMENSIONS	380 x 550 x 950mm high
WEIGHT	14kg
COMPATIBILITY	1/1 GN Pans
RUNNER SPACING	80mm

ORDER CODE

GNT1-7-11



**SHELF LOCKING MECHANISM
SECURES PANS IN PLACE**

**STAINLESS STEEL WORK TOP ADDS
ADDITIONAL FUNCTIONALITY**




SmartChef

CHROME WIRE SHELVING

SECTION INDEX

Chrome shelving	188
Inserts & lids	190-193
Kitchen scales	195
Plate shelf	189
Platform scales	194
Portion scales	194-195
Retail scales	195
<i>Scales</i>	
• Platform scales	194
• Portion scales	194-195
• Retail scales	195
<i>Shelving</i>	
• Chrome shelves	188
• Spice shelf	189
• Plate shelf	189
Spice shelf	189
Ticket holders	189
Wall mounted shelving	189

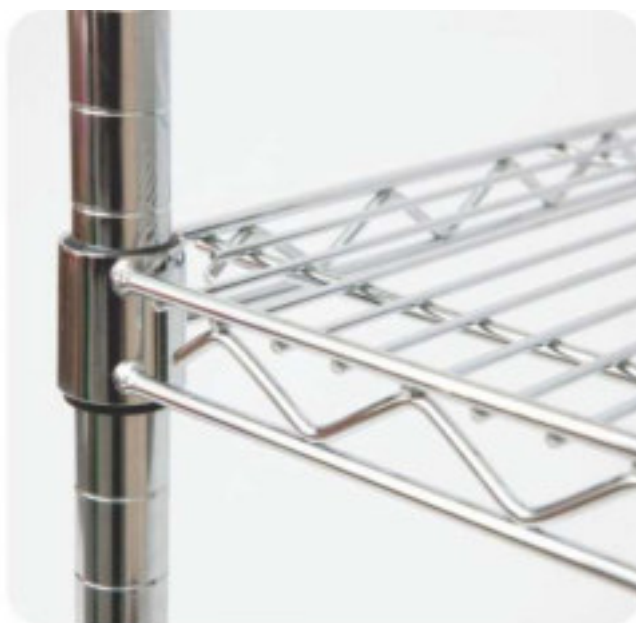



FEATURES

- Shelves are manufactured from chrome plated steel
- Easy to assemble – no tools needed
- Sturdy construction makes them durable and versatile
- Shelf heights can be adjusted to suit your application
- Grid style shelves allow increased air circulation, prolonging the life of products
- Fitted with adjustable, unit leveling legs



**ADJUSTABLE
SHELF HEIGHT**



**STURDY UNIT
LEVELING LEGS**

4 TIER, 1800mm

SPECIFICATIONS

MODEL SmartChef CJ1800
DIMENSIONS 1800 x 450 x 1800mm high
WEIGHT 20kg
SHELF DIMENSIONS 1800 x 450mm

ORDER CODE

SCS1800



4 TIER, 1500mm

SPECIFICATIONS

MODEL SmartChef CJ1500
DIMENSIONS 1500 x 450 x 1800mm high
WEIGHT 15kg
SHELF DIMENSIONS 1500 x 450mm

ORDER CODE

SCS1500



4 TIER, 1200mm

SPECIFICATIONS

MODEL SmartChef CJ1200
DIMENSIONS 1200 x 450 x 1800mm high
WEIGHT 10kg
SHELF DIMENSIONS 1200 x 450mm

ORDER CODE

SCS1200



4 TIER, 900mm

SPECIFICATIONS

MODEL SmartChef CJ900
DIMENSIONS 900 x 450 x 1800mm high
WEIGHT 8kg
SHELF DIMENSIONS 900 x 450mm

ORDER CODE

SCS0900



ADDITIONAL SHELVING



1800mm

ORDER CODE

SCS1801

1500mm

ORDER CODE

SCS1501

1200mm

ORDER CODE

SCS1201

900mm

ORDER CODE

SCS0901

WALL MOUNTED STAINLESS STEEL KITCHEN ACCESSORIES

SmartChef

WALL MOUNTED SPICE SHELF FOR GN 1/6 PANS



FEATURES

- Manufactured from high quality stainless steel
- GN Pans not included

SPECIFICATIONS

MODEL	SmartChef WSS2-1000
DIMENSIONS	1195 x 300 x 182mm high
WEIGHT	3kg
SHELF THICKNESS	30mm
COMPATIBILITY	(6x) 1/6 GN Pans

ORDER CODE	WSS2-1000
------------	-----------

GN 1/6 INSERTS



65mm
ORDER CODE GNS8065



100mm
ORDER CODE GNS8100



150mm
ORDER CODE GNS8150

WALL MOUNTED PLATE SHELF



FEATURES

- Manufactured from high quality stainless steel

SPECIFICATIONS

MODEL	SmartChef WSS1-1000
DIMENSIONS	1195 x 300 x 182mm high
WEIGHT	2kg
SHELF THICKNESS	30mm

ORDER CODE	WSS1-1000
------------	-----------

WALL MOUNTED TICKET HOLDER



FEATURES

- Manufactured from high quality stainless steel
- Paper held in place by marbles inside the clamping mechanism

SPECIFICATIONS

MODEL	SmartChef NHZ1000
DIMENSIONS	1000 x 80mm high

ORDER CODE	NHZ1000
------------	---------



FEATURES

- Manufactured from 0.8mm heavy duty stainless steel
- Rounded edges
- Anti-Jam system
- Reinforced corners



FULL INSERTS

SPECIFICATIONS

DIMENSIONS 325 x 530 x 20mm deep
CAPACITY 1.9Lt
ORDER CODE **GNF8020**

DIMENSIONS 325 x 530 x 55mm deep (perforated)
ORDER CODE **GNF8055.P**

DIMENSIONS 325 x 530 x 65mm deep (perforated)
ORDER CODE **GNF8065.P**

DIMENSIONS 325 x 530 x 150mm deep
CAPACITY 18Lt
ORDER CODE **GNF8150**

DIMENSIONS 325 x 530 x 55mm deep
CAPACITY 7.4Lt
ORDER CODE **GNF8055**

DIMENSIONS 325 x 530 x 65mm deep
CAPACITY 9.4Lt
ORDER CODE **GNF8065**

DIMENSIONS 325 x 530 x 100mm deep
CAPACITY 12.6Lt
ORDER CODE **GNF8100**

FULL LID

SPECIFICATIONS

DIMENSIONS 325 x 530mm
ORDER CODE **GNF8000**

HERMETIC SEAL LID

SPECIFICATIONS

DIMENSIONS 325 x 530mm
ORDER CODE **PLA-HSL-11**



1/2 INSERTS

SPECIFICATIONS

DIMENSIONS 265 x 325 x 65mm deep
CAPACITY 3.5Lt
ORDER CODE **GNH8065**

DIMENSIONS 265 x 325 x 150mm deep
CAPACITY 8.5Lt
ORDER CODE **GNH8150**

DIMENSIONS
CAPACITY
ORDER CODE

265 x 325 x 100mm deep
5.5Lt
GNH8100

1/2 LID

SPECIFICATIONS

DIMENSIONS 265 x 325mm
ORDER CODE **GNH8000**



2/3 INSERTS

SPECIFICATIONS

DIMENSIONS 325 x 352 x 20mm deep
CAPACITY 1.25Lt
ORDER CODE **GN2T8020**

DIMENSIONS 325 x 352 x 150mm deep
CAPACITY 11.5Lt
ORDER CODE **GN2T8150**

DIMENSIONS
CAPACITY
ORDER CODE

325 x 352 x 65mm deep
5.25Lt
GN2T8065

2/3 LID

SPECIFICATIONS

DIMENSIONS 325 x 352mm
ORDER CODE **GN2T8000**



1/3 INSERTS

SPECIFICATIONS

DIMENSIONS	175 x 325 x 40mm deep
CAPACITY	1.5Lt
ORDER CODE	GNT8040
DIMENSIONS	175 x 325 x 65mm deep
CAPACITY	2.25Lt
ORDER CODE	GNT8065
DIMENSIONS	175 x 325 x 100mm deep
CAPACITY	3.5Lt
ORDER CODE	GNT8100

DIMENSIONS	175 x 325 x 120mm deep
CAPACITY	3.5Lt
ORDER CODE	GNT8120
DIMENSIONS	175 x 325 x 150mm deep
CAPACITY	5.5Lt
ORDER CODE	GNT8150

1/3 LID

SPECIFICATIONS

DIMENSIONS	175 x 325mm
ORDER CODE	GNT8000



1/4 INSERTS

SPECIFICATIONS

DIMENSIONS	162 x 265 x 65mm deep
CAPACITY	1.5Lt
ORDER CODE	GNQ8065

DIMENSIONS	162 x 265 x 150mm deep
CAPACITY	3.75Lt
ORDER CODE	GNQ8150

1/4 LID

SPECIFICATIONS

DIMENSIONS	162 x 265mm
ORDER CODE	GNQ8000



1/6 INSERTS

SPECIFICATIONS

DIMENSIONS 160 x 175 x 65mm deep
CAPACITY 1Lt
ORDER CODE **GNS8065**

DIMENSIONS 160 x 175 x 150mm deep
CAPACITY 2.25Lt
ORDER CODE **GNS8150**

DIMENSIONS 160 x 175 x 100mm deep
CAPACITY 1.5Lt
ORDER CODE **GNS8100**

1/6 LID

SPECIFICATIONS

DIMENSIONS 160 x 175mm
ORDER CODE **GNS8000**



1/9 INSERTS

SPECIFICATIONS

DIMENSIONS 108 x 175 x 100mm deep
CAPACITY 0.8Lt
ORDER CODE **GNN8100**

1/9 LID

SPECIFICATIONS

DIMENSIONS 108 x 175mm
ORDER CODE **GNN8000**





FEATURES

- Large, backlit LCD display
- Stainless steel platform and column with ABS housed indicator
- Fitted with an internal rechargeable battery with up to 80hr lifetime
- Fitted with a built-in spirit level
- Easy to operate
- Fitted with (4x) adjustable, device leveling feet

PLATFORM SCALE

SPECIFICATIONS

MODEL	TCS150
POWER SOURCE	220V or Internal battery
DIMENSIONS	400 x 500 x 600mm high
PLATFORM DIMENSIONS	400 x 500mm
MAX WEIGHT	150kg
ACCURACY	10g

ORDER CODE

SW/PSS0150

FEATURES

- Manufactured from 430 Stainless steel
- Fully waterproof. IP68 rated certified
- Dual backlit LED display (front and rear)
- Fitted with a built-in spirit level
- Waterproof rubber keypad and an all-sealed PC board
- Fully Enclosed 6V/4Ah rechargeable battery inside
- Automatic power-off timing function
- Fitted with height adjustable feet



WATERPROOF PORTION SCALE

SPECIFICATIONS

MODEL	SmartChef JSF-15000
ELECTRICITY	220V / 6V Built-in battery
DIMENSIONS	297 x 246 x 127mm high
PLATFORM DIMENSIONS	230 x 190mm
WEIGHT	4.7kg
READABLE WEIGHT	15Kg
ACCURACY	0.5g

ORDER CODE

SW/PSS1015

**DUAL DIGITAL
DISPLAY**



FEATURES

- Fitted with a maintenance-free rechargeable battery
- Automatic fault detection, automatic calibration
- Overweight alarm function
- LCD display
- Supports a variety of weighing units
- Overload / impact protection
- Stainless steel weighing pan
- Fitted with a built-in spirit level



PORTION SCALE

SPECIFICATIONS

MODEL	JS15-05
POWER SOURCE	220V or Internal battery
DIMENSIONS	320 x 290 x 115mm high
PLATFORM DIMENSIONS	280 x 210mm
READABLE WEIGHT	15kg
ACCURACY	0.5g

ORDER CODE

SW/PSS0015

FEATURES

- LCD display
- Overload and impact protection function
- 4V/4Ah rechargeable battery inside
- Sampling function
- Built-in spirit level
- Fitted with a Stainless steel pan
- Automatic fault detection and calibration
- Fixed tare weight
- Single item weight and accumulate function
- **No printer and not compatible with a printer**



RETAIL SCALE - 15Kg

SPECIFICATIONS

MODEL	SmartChef JSA 15-05
ELECTRICITY	220V / 4V Built-in battery
DIMENSIONS	320 x 290 x 115mm high
PLATFORM DIMENSIONS	280 x 210mm
WEIGHT	3kg
READABLE WEIGHT	15Kg
ACCURACY	0.5g

ORDER CODE

SW/PSS2015

FEATURES

- Stainless steel weighing platform pan
- Fast & accurate weighing results
- LCD display
- Supports a variety of weighing units
- 1.5V (2x) AA Batteries (not included)
- Equipped with a high precision strain gauge sensor
- Easy to operate
- Count / tare function
- USB interface / power supply



KITCHEN SCALE

SPECIFICATIONS

MODEL	LD5000S
POWER SOURCE	(2x) AA batteries or USB
DIMENSIONS	240 x 165 x 60mm high
PLATFORM DIMENSIONS	155 x 155mm
WEIGHT	0.5kg
READABLE WEIGHT	5kg
ACCURACY	1g

ORDER CODE

SW/PSS0005

INDEX

A

ANKARSRUM Kitchen assistant	12-13
ARISCO Electric cooking ranges	36-37
ARISCO Gas cooking ranges with electric oven	35
ARISCO Tilting / Brat pans	38
AVATHERM Delivery boxes	176
AVATHERM Food pan carriers	178

B

Back bar coolers	102, 135
BAKEMARK Convection ovens	74
BAKEMARK Deck ovens	84-87
BAKEMARK Dough divider	17
BAKEMARK Dough proofers	75
BAKEMARK Pastry sheeters	19
BAKEMARK Planetary mixers	14
BAKEMARK Spiral dough mixers	15
Baking ovens	78, 84-87
Baking trolleys	184
Beverage containers	177
Blades for Vege prep machine	6
Blast chillers	134
Blenders	7, 94
Boiling tables (Gas)	29
Bowl Cutters	8
Brat pans	38-39
Bread mixers	15
BRICE Modular ice machines	140-141
BRICE Self-contained ice machines	142

C

Cake mixers	12-14
CAMBRO Beverage containers	177
CAMBRO CamTrays	173
CAMBRO Food pan carriers	177
CAMBRO GoBoxes	179-180
CAMBRO Insulated bases & domes	173
CAMBRO Insulated meal delivery system	173
CAMBRO Meal delivery carts	170-171
CAMBRO Serving trays	173
CamTrays	173
CATERLOT Coffee brewers	92
CATERLOT Urns	93
Cereal dispensers	125
Chafing dish heat elements	119
Chafing dish stands	118-119
Chafing dishes	
• Econo series	121
• Induction series	118-119
• PC cover series	122
• Window series	121
Char grillers (Gas)	30
Charcoal ovens	76-77
Chef bases	139
Chip cutters	9
Chip dumps	46
Chrome shelving	188
Cleaning trolleys	115
CLEME Slicers	11
Coffee brewers	92
Cold meat slicers	11
Combi steam ovens	
• Electricity	60-64, 67
• Gas	65
Cone bakers	53
Contact grills	48
Continuous sealers	24
Convection ovens	66, 68-69, 74
Conveyor toasters	50

Cooking ranges (Electric)	36-37
Cooking ranges (Gas) with electric oven	34-35
Cooking ranges with oven (Gas)	28
Cooking ranges	
• Electric (Full)	36-37
• Gas (Full)	28
• Gas (Electric oven)	34-35
COOKRITE Boiling tables (Gas)	29
COOKRITE Chef bases	139
COOKRITE Cooking ranges with oven (Gas)	28
COOKRITE Flat top griddles (Gas)	31
COOKRITE Gas fryers (Floor standing)	43
COOKRITE Radiant / Char grillers (Gas)	30
COOKRITE Salamanders (Gas)	51
COOKRITE Stands	32
Crepe makers	54
CRYSTAL Dishwashers (Front loading)	109
CRYSTAL Dishwashers (Hoodtype)	110-111
CRYSTAL Dishwashers (Conveyor)	112
CRYSTAL Display freezers	132-133
CRYSTAL Display fridges	132
CRYSTAL Ice cream scoop freezers	149
CRYSTAL Upright freezers	130, 132
CRYSTAL Upright fridges	130, 132
CRYSTAL Wok burners	40

D

Deck ovens	
• Electric	78, 84-86
• Gas	87
Delivery bags	174-175
Delivery boxes	176
Deluxe coffee urns	127
Dishwashers	
• Conveyor	112
• Front loading	107, 109
• Hood-type	108, 110-111
Display cabinets	
• Heated	155, 157, 159
• Neutral	153, 157, 159
• Refrigerated	152, 154-156, 158
Display fridges	132
Double chamber vacuum sealers	22
Dough divider & rounder	17
Dough mixers	15-16
Dough proofers	75
Dough rollers	18
Dough sheeters	19

E

EKA Combi steam ovens	60-65, 67
EKA Convection ovens	66, 68-69
EKA Gas cooking ranges with electric oven	34
EMPERO Bowl cutters	8
EMPERO Charcoal ovens	76-77
EMPERO Shawarma machines	40

F

Faucets	113
Flat top griddles	
• Electric	47
• Gas	31, 47
Floor standing display cabinets	152-154, 156-159
Food pan carriers	177-180
Food processors	8
Food serving carts	172
Frappe makers	95
Freezers	
• Display freezers	132-137
• Ice cream scoop freezers	148-149, 164
• Upright storage freezers	130-132

Fridges	
• Back bar coolers	102, 135
• Display fridges	132
• Pizza ingredient fridges	136, 165
• Saladette cabinets	136-138
• Upright storage fridges	130-132
Fry cutters	9
Fryers	
• Electric (<i>Floor standing</i>)	42
• Electric (<i>Table model</i>)	45
• Gas (<i>Floor standing</i>)	43
• Pressure	44
FURMIS Delivery bags	174-175

G

GALILEO Display cabinets	152-155
GALILEO Ice cream scoop freezers	148, 164
Gelato machines	98, 144
GENERAL WAVE Microwave ovens	52
Glass washers	106
GoBoxes	179-180
GOSHEN Gelato machines	98, 144
GOSHEN Soft serve machines	99, 145

H

Hand wash basins	114
Hand-press impulse sealers	25
Heat elements for chafing dishes	119
Heat sealing machines	25
Heated Display cabinets	155, 157, 159
Horizontal continuous sealers	24
Hose reels	114
Hot water urns	93, 127

I

Ice cream machines	98-101, 144-147
Ice cream scoop freezers	148-149, 164
Ice crushers	95
Ice machines	
• Modular	140-141
• Self-contained	142-143
IGLOO Display cabinets	156-159
IGLOO Open cooler merchandisers	161
IGLOO Open island merchandisers	162-163
IGLOO Sneezeguards	160
Impulse sealers	25
Induction chafing dishes	118-119
Induction cookers	41
Induction warmers	120
INOXSERV Cereal dispensers	125
INOXSERV Chafing dishes	118-122
INOXSERV Hot water urns	127
INOXSERV Inserts & lids	190-193
INOXSERV Juice dispensers	126
INOXSERV Soup kettles	124
Inserts & lids	190-193
Insulated bases & domes	173
Insulated meal delivery system	173

J

Janitor trolleys	115
JOHNY Ice crushers	95
JOHNY Milkshake machines	95
Juice dispensers	96, 126

K

Kitchen assistant	12
Kitchen scales	195
Knee operated hand wash basins	114
KROMET Tilting / Brat pans	39

L

Laundry trolleys	115
------------------------	-----

M

Manual lift toasters	50
Meal delivery bags	174-175
Meal delivery boxes	176
Meal delivery carts	170-171
Meat slicers	11
MEC Blast chillers	134
Merchandisers	
• Open cooler	161
• Open island	162-163
• Wall chillers	161
Microwave ovens	52
Milkshake machines	95
Mixers	12-16

N

Neutral Display cabinets	153, 157, 159
--------------------------------	---------------

O

OMAKE Crepe makers	54
OMAKE Flat top griddles (<i>Electric</i>)	47
OMAKE Flat top griddles (<i>Gas</i>)	47
OMAKE Waffle bakers (<i>Belgian, Square</i>)	55
OMAKE Waffle bakers (<i>Round, Rotating</i>)	56
OMNIWASH Dishwashers (<i>Front loading</i>)	107
OMNIWASH Dishwashers (<i>Hood-type</i>)	108
OMNIWASH Glass washers	106
Open cooler merchandisers	161
Open island merchandisers	162-163
Oven grids & pans	70, 88
Ovens	
• Charcoal ovens	76-77
• Convection ovens	66, 68-69, 74
• Combi steam ovens	60-65, 67
• Deck ovens	78, 84-87
• Microwave ovens	52
• Pastry ovens	66, 68-69, 74
• Pizza ovens	78-82
Overhead sprays	113

P

Pastry sheeters	19
Pie warmers	164
Pizza delivery bags	174-175
Pizza dough rollers	18
Pizza ingredient fridges	136, 165
Pizza ovens	78-82
Planetary mixers	12-14
Plate shelf	189
Platform scales	194

INDEX

P

CONTINUED

POLARCAB Back bar coolers	102, 135
POLARCAB Display freezers	133
POLARCAB Juice dispensers	96
POLARCAB Pizza ingredient fridges	36, 165
POLARCAB Saladette cabinets	136-138
POLARCAB Self-contained ice machines	143
POLARCAB Slush machines	97
POLARCAB Soft serve machines	100, 146
POLARCAB Upright freezers	131
POLARCAB Upright fridges	131
Polony slicers	11
Portion scales	194-195
Potato chippers	9
Pre-rinse sprays	113
Pressure fryers (<i>Electric</i>)	44
PRISMAFOOD Dough rollers	18
PRISMAFOOD Pizza ovens	78, 82
PRISMAFOOD Spiral dough mixers	16
Proofers	75

Q

R

Rack trolleys	184-185
Radiant grillers (<i>Gas</i>)	30
Refrigerated Display cabinets	152, 154-156, 158
Retail scales	195
Rice cookers	52

S

Saladette cabinets	136-138
Salamanders	51
Sandwich toasters	49
Scales	
• Platform scales	194
• Portion scales	194-195
• Retail scales	195
Serving trays	173
Shawarma machines	40
Shelving	
• Chrome shelves	188
• Spice shelf	189
• Plate shelf	189
Single chamber vacuum sealers	23
Slicers	11
Slush machines	97
SMARTBLEND Blenders	7, 94
SMARTCHEF Baking trolleys	184
SMARTCHEF Chip dumps	46
SMARTCHEF Chrome shelving	188
SMARTCHEF Cleaning trolleys	115
SMARTCHEF Cone bakers	53
SMARTCHEF Contact grills	48
SMARTCHEF Conveyor toasters	50
SMARTCHEF Electric fryers (<i>Table model</i>)	45
SMARTCHEF Electric fryers (<i>Floor standing</i>)	42
SMARTCHEF Electric pressure fryers	44
SMARTCHEF Flat top griddles (<i>Electric</i>)	47
SMARTCHEF Fry cutters	9
SMARTCHEF Knee operated hand wash basins	114
SMARTCHEF Pie warmers	164
SMARTCHEF Pizza ovens	80-81
SMARTCHEF Rack trolleys	184-185
SMARTCHEF Rice cookers	52
SMARTCHEF Salamanders (<i>Electric</i>)	51
SMARTCHEF Sandwich toasters	49
SMARTCHEF Soft serve machines	101, 147

SMARTCHEF Spiral potato cutter	10
SMARTCHEF Tea trolleys	182-183
SMARTCHEF Ticket holders	189
SMARTCHEF Toasters	50
SMARTCHEF Vegetable preparation machines	6
SMARTCHEF Waffle bakers (<i>Round</i>)	58
SMARTCHEF Waffle bakers (<i>Square</i>)	57
SMARTCHEF Waffle lolly bakers	57
SMARTCHEF Wall mounted shelving	189
SMARTCHEF-i Induction cookers	41
SMARTCHEF-i Induction warmers	120
SMARTVAC Continuous sealers	24
SMARTVAC Impulse sealers	25
SMARTVAC Vacuum sealers	22-23
SMARTVAC Wrapping machines	25
SMARTWAY Scales	194-195
Smoothie makers	7, 94
Sneezeguards	160
Soft serve machines	99-101, 145-147
Soup kettles	121, 124
Soup warmers	119
Spice shelf	189
Spiral dough mixers	15-16
Spiral potato cutter	10

T

T&S Faucets	113
T&S Hose reels	114
T&S Pre-rinse sprays	113
Table model display cabinets	155, 164
Tea trolleys	182-183
Ticket holders	189
Tilting pans	38-39
Toasters	
• Contact grills	48
• Conveyor	50
• Manual lift	50
• Sandwich	49
Tray clearing trolleys	181
TRAYPORT Food serving carts	172
TRAYPORT Tray clearing trolleys	181

U

Upright freezers	130-132
Upright fridges	130-132
Urns	93, 127

V

Vacuum sealers	22-23
Vegetable preparation machines	6
Vertical continuous sealers	24
VOLLRATH Fry cutters	9

W

Waffle bakers	
• Belgian	55, 57
• Cone bakers	53
• Lolly (<i>waffle on a stick</i>)	57
• Round	56, 58
Wall chillers	161
Wall mounted shelving	189
Wok burners	40
Wrapping machines	25

X • Y • Z

DISCLAIMER

Every effort has been made to ensure that the information contained in this catalogue at the time of publishing is true and accurate.

The seller accepts no responsibility or liability that may arise through the reliance of the information contained herein.

Images used are for illustration purposes only and may vary slightly from the actual product.

Reproduction, even partial, of images, text, etc of this catalogue for commercial purpose, is strictly prohibited.



eka *SmartChef* **IGLOO** **JOHNY** **arisco** **CRYSTAL**
MARTBLEND *Goshen* **POLARCA** **OmniWASH** *SmartWay*
CAMBRO *aterLot* **prismafood** **EMPERO** *omake* **T&S**
BakeMark *CookRite* **inoxserv** *Galileo* **CRYSTAL**

